GE 130

C.P.U. SUBSYSTEM

Maintenance

A Field Engineering publication

4.571.4.001.0/A

Honeywell

Honeywell Information Systems Italia

REVISION LEVEL

UPDATE Nº	PAGES AFFECTED	DATE
	First edition - Title page P.N. 4.571.4.001.0/A	November 68
1	III-V-17 - 18 - 18/a - 24 - 29	May 1971

Mod. 6732

N.B. Remove pages identified with crossed numbers

INDEX

1.	OPERATOR TASKS	Page	1
1.1.	General rules	"	3
1.2.	Register lamps replacement	"	4
1.3.	Pushbutton lamps replacement	"	7
2.	MAINTENANCE CHECKS	"	9
2.1.	Appearance checks	"	11
2.2.	Operator panel check	"	12
2.3.	Maintenance panel check	"	13
2.4.	Fan check	"	14
3.	CLEANING AND LUBRICATION	"	15
3.1.	Filter regeneration or replacements	"	17
4.	ADJUSTMENTS	"	19
5.	REMOVALS AND REPLACEMENTS	"	21
5.1.	Board repair	"	23
5.2.	VAR 321 fan replacement	"	24
5.3.	VAR 321 thermoswitch replacement	"	25
5.4.	Operator panel pushbutton replacement	"	26
5.5.	Maintenance panel toggle switch replacement	"	28
5.6.	Memory stack removal and replacement	"	29
6	MAINTENANCE AIDS	"	31

1. OPERATORS TASKS

ROUTINE : **1.1**

NAME : General rules
DURATION : -
PREREQUISITES : -

1 - TOOLS AND INSTRUMENTS

- None.

2 - PURPOSE

- To ensure perfect machine operation.

3 - PRELIMINARY CHECKS

- None.

4 - PROCEDURE

1) - Ensure that the floor and the surrounds are frequently cleaned to prevent dust accumulating on the machine filters.
Clogged filters cause poor ventilation and an increment in the temperature within the machines, with a consequent reduction in efficiency.

2) - Do not use equipment that could damage the surface finish when cleaning panels and skins.

3) - Ensure that the wings have their top slot open and without impediment to the free flow of air.

4) - Ensure that the ambient conditions (temperature and relative humidity) are within the accepted tolerances.
Keep a constant check on the field of variations. This will obviate faults not normally attributed to environmental conditions.

5 - FINAL CHECKS

- None.

ROUTINE : **1.2**

NAME : Register lamps replacement
DURATION : 0.10 hr
PREREQUISITES : The machine must be OFF

1 - TOOLS AND INSTRUMENTS

- None.

2 - PURPOSE

- To replace a burnt-out register lamp.

3 - PRELIMINARY CHECKS

- Switch the machine ON and press LAMPS CHECK. All lamps must light.

4 - PROCEDURE

1) - Lift off the register lamps mask.




Fig. 1.1. - Removal of lamp mask

2) - Grasp the lamp housing block at both ends and lift it off squarely.

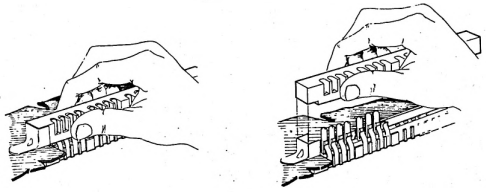


Fig. 1.2. - Lamps housing block removal

3) - Remove the burnt-out lamp.




Fig. 1.3. - Lamp removal

4) - Mount the new register lamp, replace the housing block and the mask.

5 - FINAL CHECKS

- Press LAMP CHECK and ensure that the replaced register lamp lights.

ROUTINE : **1.3**

NAME : Pushbutton lamps replacement
DURATION : 0.10 hr
PREREQUISITES : Equipment must be OFF

1 - TOOLS AND INSTRUMENTS

- Lamp extractor tweezers P.N. 5570510 Z

2 - PURPOSE

- To replace a pushbutton burnt-out lamp.

3 - PRELIMINARY CHECKS

- Switch the machine ON and press LAMP CHECK. All lamps must light. Lamps relative to SWITCH 1, SWITCH 2, LOAD 1 / LOAD 2,STEP BY STEP and STAND BY are to be tested individually.

4 - PROCEDURE

1) - Lift off the pushbutton plastic cover.




Fig. 1.4. - Removal of plastic cover

2) - Pull out the lamp with the special tweezers.

3) - Pull off the plastic hood from the old lamp and fit it to the new one.




Fig. 1.5. - Removal of burnt lamp

4) - Mount the new pushbutton lamp and with slight finger pressure re place the plastic cover.

5 - FINAL CHECKS

- Press LAMP CHECK and check that the replaced lamp lights.

2. MAINTENANCE CHECKS

ROUTINE : **2.1**

NAME : Appearance checks
DURATION : -
PREREQUISITES : The machine must be OFF

1 - TOOLS AND INSTRUMENTS

- None.

2 - PURPOSE

- To check security and stability of components making up the structures of the system.

3 - PRELIMINARY CHECKS

- None.

4 - PROCEDURE

1) - Visually check that no assembly has been damaged and that all support structures, frames and chassis are secure and safe.
If any anomaly is found, proceed to rectify it.

5 - FINAL CHECKS

- None.

ROUTINE : **2.2**

NAME : Operator panel check
DURATION : -
PREREQUISITES : -

1 - TOOLS AND INSTRUMENTS

- None.

2 - PURPOSE

- To make sure of the correct operation of the Operator panel.

3 - PRELIMINARY CHECKS

- Refer to Routine 1.3. and Routine 1.4. for replacement and check-out of lamps.

4 - PROCEDURE

1) - Press all the pushbuttons of the operator panel. They must return to their original position quickly and without resistance.
If doubts arise upon their operation, replace them as per Routine 5.4.

5 - FINAL CHECKS

- None.

ROUTINE : **2.3**

NAME : Maintenance panel check
DURATION : -
PREREQUISITES : -

1 - TOOLS AND INSTRUMENTS

- None.

2 - PURPOSE

- To make sure of correct Maintenance panel operation.

3 - PRELIMINARY CHECKS

- Check serviceability of panel fuse.

4 - PROCEDURE

1) - Remove the formica cover from the Maintenance panel.

2) - Ensure that the switches operate without hesitation and without undue pressure. If a switch needs replacing, see Routine 5.5.

3) - Ensure that the rotary switch turns to all positions, in both directions, without undue force and is coincident with the writings.

4) - Switch the machine ON and switch to LAMPS ON.
Press LAMPS CHECK and check all lamps to be lit.
If a lamp needs replacing, see Routine 1.3. steps 2, 3 and 4.

5) - Switch to LAMPS OFF.

6) - Replace the formica top on the Maintenance panel.

NOTE

It is imperative to place the switch to LAMPS OFF before replacing the formica top, otherwise button MAINT ON, on Operator panel, will light up. MAINT ON is also pertinent to the Board Tester circuits (VAR 380).

5 - FINAL CHECKS

- None.

ROUTINE : **2.4**

NAME : Fan check
DURATION : -
PREREQUISITES : -

1 - TOOLS AND INSTRUMENTS

- None.

2 - PURPOSE

- To check out VAR 321 fans operation.

3 - PRELIMINARY CHECKS

- The check must be done with the equipment switched on.

4 - PROCEDURE

1) - Check that the fans rotate noiselessly.

2) - If a noisy fan is to be replaced, refer to Routine 5.2.

5 - FINAL CHECKS

- None.

3. CLEANING AND LUBRICATION

ROUTINE : **3.1**
NAME : Filter regeneration or replacements
DURATION :
PREREQUISITES : Machine Off.

1 - TOOLS AND INSTRUMENTS

- Filter elements
- Detergent, household fluid

2 - PURPOSE

- Restore fan filter elements' efficiency.

> Note
> This routine is also a guide for all the Std System level filter operations requested by the Maintenance Schedules.

3 - PRELIMINARY CHECKS

- The operation is normally carried out according to the preventive maintenance log.
- Check the filter support frame and panel's state of wear.

> Note
> Site room environmental conditions not held within the normal limits will directly influence the filter's life duration.

4 - PROCEDURE

1) - Remove the 2 covers, at the foot of the CPU or memory extension wing (and all the involved system wings), by pressing and turning the spring loaded fasteners.
In case of single covers, merely remove this wing panel.

2)a - Filter housed with visible filtering element and retaining spring

(The filter frame does not need to be removed).
Push in one end of the retaining spring and then extract the spring.
Paying attention not to jerk the filter, so as not to spread dirt, discard and replace it with a new element.
Ascertain that the filtering element does not go beyond the frame edges, replace the retaining spring and fix the frame.

Note
Ensure the frame is well home to avoid air by - passes.

2)b - Filter housed with filtering element and spring not in sight

(The filter frame must be removed).
Loosen the knurled thumb screws until the filter frame brackets become free.
Extract the entire filter frame and then proceed to replace the filter ing element as described at 2)a.
Therefore, replace the frame paying attention to respect the air cir - culation sense.

2)c - Metallic regeneration type filter

This type of filter may either be cleaned by :

- air blasting the element in the opposite direction of the normal air flow (that is to say opposite to the "AIR" sense arrows shown on the filter cover) or
- rinsing the element in water and/or household detergent and subse quently drying it with an air blast.



Fig. 3.1. - Removal of CPU filter panels

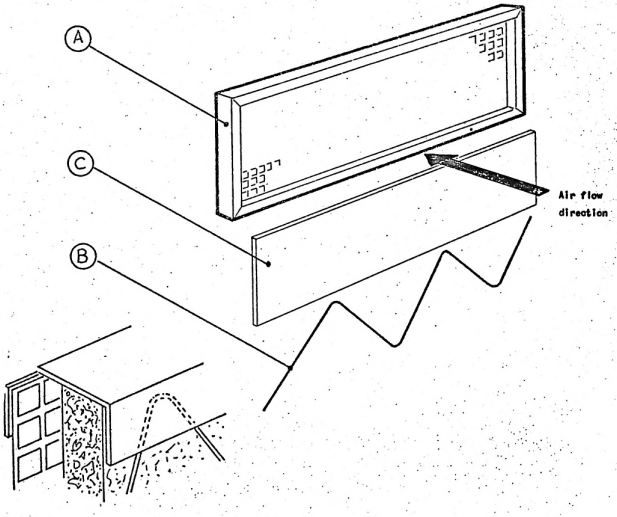


Fig. 3.2. - Fitter mounting

(A) - Metallic frame
(B) - Filter element ("use and throw-away" type)
(C) - Retaining spring

5 - FINAL CHECKS

- None.

4. ADJUSTMENTS

5. REMOVALS AND REPLACEMENTS

ROUTINE : **5.1**

NAME : Board repair
DURATION : -
PREREQUISITES : See note

NOTE		
Refer to the following publication when repairing boards:		
- Board Tester Instruction Manual.	P.N.	14674005
- FAULT Vocabulary.	"	4.002.4.000.
- Board Repair Procedure.	"	4.002.4.001.
- Package Replacement Procedure.	"	3.002.4.003.

ROUTINE : **5.2**
NAME : VAR 321 fan replacement
DURATION : 0.5 hr
PREREQUISITES : The machine must be OFF

1 - TOOLS AND INSTRUMENTS

- Screwdriver blade 4 mm
- Soldering iron
- Solder
- General purpose handle

P.N. 4355313 N
" 7144451 X
" 6138215 L
" 7138485 B

2 - PURPOSE

- To replace a defective VAR 321 fan.

3 - PRELIMINARY CHECKS

- None.

4 - PROCEDURE

1) - Remove the two panels at the base of the CPU or memory extension wing. If the CPU has a single cover merely remove this panel.
2) - Remove the two filters as per Routine 3.1.
3) - Remove the two outer screws securing the fan assembly.
4) - Remove the +20 V input lead from the VAR 321, P21 terminal strip.
5) - Withdraw the fan mounting plate. Do not pull the fan supply cable.
6) - Unsolder the two supply leads from the defective fan.
7) - Unscrew the fan from the mounting plate.
8) - Remove the finger guard grille from defective fan.
9) - Mount the finger guard grille on the new fan, on air input side.
10) - Mount the new fan following the removal sequence in the reverse order.

5 - FINAL CHECKS

- Switch the machine on and check for correct operation.

ROUTINE : **5.3**

NAME : VAR 321 thermoswitch replacement
DURATION : 0.5 hr
PREREQUISITES : The machine must be OFF

1 - TOOLS AND INSTRUMENTS

- Screwdriver	2.5 mm	P.N. 4355475 P
- Soldering iron		" 7144451 X
- Solder		" 6138215 L
- Screwdriver blade	4 mm	" 4355313 N
- General purpose handle		" 7138485 B

2 - PURPOSE

- To replace a defective thermoswitch on the VAR 321.

3 - PRELIMINARY CHECKS

- None.

4 - PROCEDURE

1) - Carry out steps 1, 2, 3, 4 and 5 of Routine 5.2.
2) - Remove the two screws fixing the defective thermoswitch group.
3) - Unsolder the two thermoswitch supply leads.
4) - Remove the two screws fixing the resistor and plate to the lid.
5) - Take out the thermoswitch plate and put in a new one(P.N.0842638 T).
6) - Replace the two resistor and plate to lid fixing screws.
7) - Restore electrical connections to the thermoswitch.
8) - Secure with the two screws the complete group to the fan group.
9) - Install the termoswitch back in its place following the reverse sequence of removal.

5 - FINAL CHECKS

- None.

ROUTINE : **5.4**

NAME : Operator panel pushbutton replacement
DURATION : 0.3 hr
PREREQUISITES : The machine must be OFF

1 - TOOLS AND INSTRUMENTS

- Soldering iron	P.N. 7144451 X
- Solder	" 6138215 L
- Screwdriver 4 mm	" 4355313 N
- Lamp extractor tweezers	" 5570510 Z

2 - PURPOSE

- To replace a faulty Operator panel pushbutton.

3 - PRELIMINARY CHECKS

- None.

4 - PROCEDURE

1) - Lift off the formica top and set it aside.
2) - Deskin the Operator panel.
3) - Lift and latch open the Operator panel.
4) - Remove the plastic cover from the faulty pushbutton.
5) - Remove the lamp hoods, if any, and utilize the extractor to pull out the unserviceable lamp.
6) - Unsolder the pushbutton leads.
7) - With the aid of a screwdriver shift one by one the pushbuttons away from the faulty one (leftward) to give it removal clearance. Remove the button.
8) - Install the replacement item.
9) - Return the pushbuttons to their original symmetry.
10) - Replace the lamps hoods, the lamps and the pushbutton cover.
11) - Restore electrical connections.
12) - Unlatch and close the Operator panel.

13) - Mount the panel skin.

14) - Replace the formica top on the Maintenance panel.

5 - FINAL CHECKS

- Check out the operation of the replaced pushbutton.

CAUTION
Use care not to allow solder drops fall on the underlying components (MPA 460).

ROUTINE : **5.5**

NAME : Maintenance panel toggle switch replacement.
DURATION : 0.3 hr
PREREQUISITES : The machine must be OFF

1 - TOOLS AND INSTRUMENTS

- Pliers, angled	P.N. 7137969 Y
- Soldering iron	" 7144451 X
- Solder	" 6138215 L

2 - PURPOSE

- To replace a faulty maintenance panel toggle switch.

3 - PRELIMINARY CHECKS

- None.

4 - PROCEDURE

1) - Carry out steps 1, 2 and 3 of Routine 5.4.
2) - Unsolder electrical leads from rear of switch.
3) - Unscrew the switch lock nut with the pliers.
4) - Pull it out from underside and similarly fit new item.
5) - Restore switch electrical connections.
6) - Unlatch and close the Operator panel.
7) - Mount the panel skin.
8) - Replace the formica top on the Maintenance panel.

5 - FINAL CHECKS

- None.

CAUTION

Use care not to allow solder drops fall on the underlying components (PCA 450).

ROUTINE : **5.6**
NAME : Memory stack removal and replacement
DURATION : -
PREREQUISITES : The machine must be OFF

1 - TOOLS AND INSTRUMENTS

- Screwdriver blade P.N. 4355315 F
- General purpose handle " 7138485 B

2 - PURPOSE

- To ensure that the stack is removed and/or replaced without causing damage to it.

3 - PRELIMINARY CHECKS

- None.

4 - PROCEDURE

1) - Remove the 2 CPU or memory extension wing panels corresponding to the stack to be removed. If the CPU is covered by a single panel, remove the one covering the wire-wraps, then also remove the memory stack protective cover.
2) - Board side
   a - Insert fingers in stack cover and pull it off.
   b - Release from their connectors the two upper DIRE 24 boards and the two lower DIRE 2B boards.
   Do not pull them out too much because they are physically wire connected to the stack.
3) - Wire - wrap side
   a - Progressively and alternatively uncrew the extractors for the AMP connectors (two each).
   b - Unscrew the stack fixing bolt and withdraw the stack.
4) - Insert the replacement stack and carry out removal operations in their reverse order. Do not overtighten the AMP connectors.

5 - FINAK CHECKS

- Check the operation of the newly installed memory stack by executing the "CPU Functional Test" diagnostic program.

6. MAINTENANCE AIDS

1ª APPLIC. CONT. SU FG. I FG. 0

NORME D'USO PER APPARECCHIATURA
PROVA PIASTRE.

BOARD TESTER OPERATING RULES

VAR 380

REVISION DATE 69.01.13 | 68.08.12

S.T. CONF. A.I. TIPO REF.

UNIT

COMPIL. Parolo
EMISS. 30/11/1968
APPR. H. Vinsen
STS. S.P.S.
SEC.
LOC. Pregnana
Nº 146740050
CONT. SU FG. I FG. 0

Cod. 3861/28 F

INDICE - INDEX

		Pagg.
1.	Procedura d'uso	1
1.1.	Premessa	1
1.2.	Estrazione delle piastre dalla macchina	1
1.3.	Posizionamento commutatori	1
1.4.	Accensione del prova piastre	1
1.5.	Check prova piastre	1
1.6.	Posizionamento commutatori ingresso-uscita	3
1.7.	Prova della piastra	3
1.8.	Sostituzione del componente	4
1.9.	Estrazione del prova piastre	4
2.	Procedura di autodiagnosi	6
2.1.	Procedura di prova	6
2.2.	Procedura di localizzazione del guasto	7
2.2.1.	Sintomi di primo tipo	8
2.2.2.	Sintomi di secondo tipo	10
2.2.3.	Sintomi di terzo tipo	11
3.	Application rules	12
3.1.	Foreword	12
3.2.	Boards removal	12
3.3.	Switches positioning	12
3.4.	Board tester ON	12
3.5.	Board tester check	12
3.6.	Input-output switches positioning	13

		Page.
3.7.	Board test	13
3.8.	Component replacement	14
3.9.	Board tester removal	14
4.	Board tester self-error-detection procedure	16
4.1.	Test procedure	16
4.2.	Failure detection procedure	17
4.2.1.	First type symptoms	18
4.2.2.	Second type symptoms	20
4.2.3.	Third type symptoms	21

1. PROCEDURA D' USO

1.1. Premessa

L'apparecchiatura prova piastre, inserita nella console del GE 130, serve alla localizzazione di guasti relativi a C.I. o transistors sulle piastre dello standard SCM 3.
L'esame si effettua confrontando i segnali in uscita della piastra in prova con i segnali provenienti da una piastra campione simulata con una scheda d'alluminio.
Qualora fosse presente una discordanza, indice di guasto, si accendono uno o più lampadini di segnalazione.
In base alla configurazione di lampadini accesi è possibile risalire al componente guasto, consultando il Vocabolario Fault.

1.2. Estrazione delle piastre dalla macchina

Le piastre che il programma diagnostico avrà identificato come probabilmente guaste, devono essere estratte dalla macchina a tensione spenta.

1.3. Posizionamento commutatori

Il commutatore ON/OFF deve essere in posizione OFF.
Il commutatore O/S deve essere in posizione O.

1.4. Accensione del prova piastre

Data di nuovo tensione alla macchina (GE 130) si accende il prova piastre. Commutatore ON/OFF in posizione ON.

1.5. Check prova piastre

1.5.1. All'atto della messa in funzione dell'apparecchiatura è consigliabile effettuare un check generale come indicato nella procedura di autodiagnosi (§ 2).
Se invece durante il funzionamento si rendesse necessario un rapido controllo dell'efficienza dei lampadini, si può adottare il procedimento semplificativo di seguito indicato (1.5.2. e 1.5.3.).

1.5.2. I commutatori A1, A2,... H1, H2, devono essere disposti in posizione uscita (verso il basso). Comm. O/S su O.
La pressione di START deve provocare l'accensione di tutti i lampadini di controllo.

NORME D'USO PER APPARECCHIATURA
PROVA PIASTRE - VAR 380

1ª APPLIC.

CONT. SU FO. 3

FO. 2

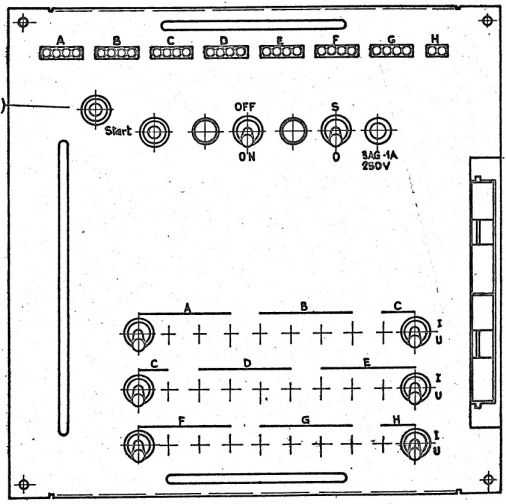


Fig. 1

REVISIONE 69.03/2 69.02.13

S.T.

COMPILATO:

IND. RIF.

COMPIL. C. Parolo	APPR.	UNITÀ SEZ. SEC. S.P.S. LOC. Pregnana	Nº 146740050
EMISS. 30/11/1968			CONT. SU FO. 3 FO. 2

Cod. 3896129 F

1.5.3. Si dispongono poi i commutatori A1, A2....,H1,H2 in posizione ingresso (verso l'alto).
La pressione di START deve provocare lo spegnimento di tutti i lampadini.

1.6. Posizionamento commutatori Ingresso-Uscita

1.6.1 Si infila la scheda corrispondente alla piastra da provare nella feritoia del lettore e la si preme a fondo; si procède alla lettura della riga "0" premendo "START".
Ciò determina l'accensione di alcune lampadine di controllo.
Occorre allora disporre in posizione uscita i commutatori corrispondenti ai lampadini accesi.
Premendo nuovamente START, se il posizionamento dei commutatori è stato effettuato in modo corretto, tutti i lampadini di controllo dovranno risultare spenti.

1.6.2. Si inserisce poi la piastra in prova nei connettori C1 e C2 a destra del pannello frontale del prova piastre.

1.6.3. Effettuate tali operazioni si dispone il commutatore O/S(fig. 1) in posizione S alimentando così la piastra in prova.

1.7. Prova della piastra

1.7.1. Premendo il tasto di avanzamento T (fig.1) si fa avanzare la scheda e si procede alla lettura della riga 1 premendo START (è indispensabile effettuare tali operazioni una alla volta: prima il tasto del lettore T poi il tasto START)
Se i lampadini rimangono spenti, l'esito della prova si considera positivo, nel senso che o la piastra non è guasta o l'eventuale guasto non influenza il funzionamento della piastra in corrispondenza di tale configurazione di prova.
Si passa poi alla prova successiva avanzando la scheda di una riga (tasto T), si preme START...ecc.

1.7.2. La presenza di un guasto sulla piastra provocherà l'accensione di uno o più lampadini in corrispondenza di una data prova. Occorre rilevare il numero della configurazione di prova applicata, quale risulta affiorante dalla feritoia del lettore, nonchè la configurazione di errore dei 30 lampadini. Si passerà quindi alla consultazione del vocabolario FAULT per ottenere la localizzazione del componente guasto.

REVISION DEP. 69.02 69.02.13

S.T. FORM A 1 ING REP.

COMPIL. C. Parolo	APPR.	UNIT SEZ. SEC. S.P.S. LOC. Pregnana	N° 146740050
EMISS. 30/11/1968 - gi			CONT. SU FO. 4 FO. 3

Cod. 3946728 F

1.8. Sostituzione componente

1.8.1. Identificato il "package" da sostituire, si devia il commutatore O/S in posizione O e si sfila la piastra.
Sostituito il "package" guasto (vedi proc.nº 3002400030) con uno funzionante, si ripete la prova dall'inizio.
Se la piastra risulterà riparata in modo corretto, i lampadini di controllo nelle prove 1, 2, 3 .....,n, dopo ogni pressione di START, dovranno rimanere spenti.

1.8.2. Nel caso che esista una indeterminazione su più "packages" verrà sostituito un "package" alla volta, e ad ogni sostituzione si procede ad una nuova prova della piastra.

1.8.3. Se il circuito sospetto è a componenti discreti, il primo componente da sostituire è il transistor, nel caso che il guasto permanga, occorre procedere alla verifica degli altri componenti.

1.9. Estrazione del Prova Piastre

1.9.1. Prima di iniziare eventuali operazioni di estrazione dell'apparecchiatura, assicurarsi che le tensioni di macchina siano spente.

1.9.2. Svitare quindi le viti che fissano il lettore alla console. Non eseguendo tale operazione è facile determinare l'imbarcamento del pannello del prova piastre.

1.9.3. Una volta sollevata l'apparecchiatura della console, appoggiarla sul piano della console di manutenzione, curando di non provocare corto circuiti sulle parti elettriche scoperte.

1.9.4. Un corto tra +5 e massa provoca lo spegnimento dell'alimentatore +5 sulla U.C.

1.9.5. Un corto tra +12 e massa o tra +12 e +5, provoca l'apertura del fusibile del VAR 380 e/o lo spegnimento dell'alimentatore dell' U.C.

AVVERTENZE:

- La pressione di START deve essere effettuata una sola volta. I casi eccezionali in cui si richiedono due pressioni vengono segnalati sul vocabolario FAULT.

- E' necessario procedere nelle prove secondo la sequenza 0, 1, 2, 3, ecc. indicata nella scheda. Non è possibile tornare indietro di un passo e premere di nuovo lo START. In ogni caso, se non si è seguito tale ordine, ricominciare da zero.

- Nei casi in cui si abbiano due schede di prova per una sola piastra, non ha importanza quale delle due inserire per prima nel lettore.
Inoltre non è necessario effettuare il riposizionamento dei connettori ingresso-uscita.
Nel caso che la configurazione di errore non fosse prevista dal vocabolario FAULT, è bene ricordare che può essere avvenuto un corto circuito sui pins di ingresso o sui contatti del connettore. Si fornisce di seguito la tabella di corrispondenza tra i pins dei connettori C1 e C2 (fig. 1) e i lampadini della console del VAR 380.

Connettore C1	Lampadino (numerazione progressiva da sinistra a destra)	Connettore C2	Lampadino (numerazione progressiva da sinistra a destra)
pin 1	1	pin 1	16
2	2	2	17
3	3	3	18
4	4	4	19
5	5	5	20
6	6	6	21
7	7	7	22
9	8	9	13
10	9	10	24
11	10	11	25
12	11	12	26
13	12	13	27
14	13	14	28
15	14	15	29
16	15	16	30

2. PROCEDURA DI AUTODIAGNOSI DEL PROVA-PIASTRE

La procedura di autodiagnosi fornisce una prova globale del corretto funzionamento del prova-piastre, nonchè un elenco di correlazioni sintomo-guasto atto alla localizzazione del componente elettronico difettoso.

2.1. Procedura di Prova

La procedura di prova prevede alcune operazioni sui commutatori della console del prova-piastre, e utilizza come scheda di riferimento quella relativa alla piastra NONA 2A (n. cod. 0610048U). Di questa piastra vengono utilizzate solo le configurazioni 1 e 6. Utilizza anche il tappo di protezione del connettore in cui normalmente viene disposta la piastra di prova.
I sintomi vengono raccolti in base ai 30 lampadini della console del prova-piastre.
Dopo aver inserito l'alimentazione nel prova-piastre (mediante il commutatore ON/OFF), si esegue la sequenza di 10 prove come da tab. 1.
La prima colonna fornisce il numero progressivo della prova. La colonna seconda+sesta indicano le operazioni corrispondenti alle singole prove. La seconda colonna specifica se il tappo di protezione deve essere inserito (IN) o estratto(OUT). La terza colonna specifica come deve essere disposto il commutatore O/S; la quarta colonna specifica come devono essere disposti tutti i 30 commutatori I/U. La quinta colonna specifica il posizionamento della scheda di riferimento nel lettore, indicando quale configurazione (1 o 6) debba risultare applicata. Infine la sesta colonna indica se il pulsante START deve essere premuto (SI) oppure no (NO).
Nell'ultima colonna sono riportate lo segnalazioni relative alla sequenza corretta ("1" significa: tutti i 30 lampadini sono accesi; "0" significa: tutti i 30 lampadini sono spenti).

TABELLA 1

PROVA	TAPPO	O/S	I/U	RIGA	START	LAMPS
1	IN	O	U	1	SI	1
2	OUT	O	U	1	SI	O
3	OUT	O	U	6	SI	1
4	OUT	O	I	6	NO	1
5	OUT	O	I	6	SI	O
6	OUT	O	U	6	NO	O
7	OUT	O	U	6	SI	1
8	OUT	O	U	1	SI	O
9	OUT	O	I	1	NO	1
10	OUT	S	I	1	SI	O

2.2. Procedura di localizzazione del guasto

Se il funzionamento del prova-piastre è corretto, ciascuno dei 30 lampadini fornirà la segnalazione prevista dalla Tab. 1.
Qualora uno o più lampadini in una o più prove non rispettano la sequenza di segnalazioni prevista, si deduce che nell'apparecchiatura è presente un guasto.
Nel seguito viene fornita la procedura di localizzazione della piastra difettosa e del componente elettronico guasto, in base al sintomo osservato.
Si possono riscontrare tre tipi di sintomi:

1° tipo = sequenza errata per un solo lampadino
2° tipo = sequenza errata per tre lampadini
3° tipo = sequenza errata per più di tre lampadini

REVISIONI DATE 69.12.12 69.12.13

2.2.1. Sintomi di 1° Tipo

Il lampadino interessato potrà essere uno qualunque dei 30 presenti nella console.
Una volta identificato il lampadino, completare la sequenza delle prove, rilevando in quali prove il lampadino sbaglia.
La seconda riga della Tab. 2 permette di individuare la piastra difettosa.
La terza riga della tab.2 suddivide i lampadini in tre classi distinte: X, Y e Z.
Per la localizzazione del guasto all'interno della piastra, occorre:

a) ricercare fra le sequenze riportate nella tabella 3, la sequenza errata relativa al lampadino in esame; la sequenza errata viene identificata dai numeri progressivi delle prove in cui il lampadino in esame si è scostato dalla sequenza corretta;

b) leggere l'indicazione di componente guasto nella colonna corrispondente alla classe del lampadino in esame.

Nella rappresentazione del componente guasto, valgono le convenzioni del vocabolario FAULT.

NORME D'USO PER APPARECCHIATURA
PROVA PIASTRE - VAR 380

1ª APPLIC.

CONT. SU FO. 10 FO. 9

TABELLA 2

LAMP	A1	A2	A3	A4	B1	B2	B3	B4	C1	C2	C3	C4	D1	D2	D3	D4	E1	E2	E3	E4	F1	F2	F3	F4	G1	G2	G3	G4	H1	H2
PIASTRA GUASTA FULO 2A in pos.A	12	11	10	9	8	6	5	4	3	2	12	11	10	9	8	6	5	4	3	2	12	11	10	9	8	6	5	4	3	2
CLASSE	X	X	X	X	X	X	X	X	X	X	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z

SERVIZIO DoF 69312 69.02.13

COMP. A: FIG. PO:

SJ

UNIT

COMPIL.	APPR.	SOC.	NT
L. Menghini		S.P.S.	146740050
EMISS. 30/11/1968		LOC. Pregnana	CONT. SU FO. 10 FO. 9

Cod. 3896128 F

TABELLA 3

PROVE	COMPONENTI GUASTI SU PIASTRA FULO 2A		
1,2,3,4,5,6,7,8,9,10	X	Y	Z
2 5 6 8 10	V04 U25 U30	V05 U28 U29	V06 U21 U26
2 8 10	U30	U28	U26
10	V07 U23	V08 U23	V09 U23
1 3 4 7 9	V04	V05	V06
9	U23 U25	U23 U29	U21 U23
1 2 8	U24 U25	U27 U29	U21 U22
2 8	U23 U24	U23 U27	U22 U23
8	U24	U27	U22
1 3 4 7	U24 U25 U30	U27 U28 U29	U21 U22 U26
3 4 7	U24 U25 U30	U27 U28 U29	U21 U22 U26
5 6	V07 U23 U25 U30	V08 U23 U28 U29	V09 U21 U23 U26
6	U25 U30	U28 U29	U21 U26
3 4	U30	U28	U26
4	U30	U28	U26
1	U30	U28	U26

2.2.2. Sintomi di 2° tipo

Questo sintomo può considerarsi come caso particolare del § 2.1.
Esso consiste nell'errore contemporaneo di tre lampadini alla prova 9 (risultano spenti anzichè accesi).
In tal caso è sufficiente consultare la tab.2 per ricavare la localizzazione della piastra guasta.
Il package guasto è sempre in posizione U23.

REVISION Dep 69012 69.02.13

2.2.3. Sintomi di 3° tipo

I sintomi di questo tipo sono caratterizzati dal fatto che la sequenza errata interessa nel suo complesso 15 o 30 lampadini. (Si noti che la sequenza può non essere uguale per tutti i 15 o i 30 lampadini).
In tal caso la piastra guasta è la COMA 2A in posizione A-7.
L'identificazione dei componenti guasti è affidata alla tab.4:

TABELLA 4

Lampadini interessati alla sequenza errata	Componenti guasti
TUTTI E 30	U27 U28 V02 V03
A1,A2,A3,A4,B1 - C3,C4,D1,D2,D3 - F1,F2,F3,F4,G1	U26 U30
B2,B3,B4,C1,C2 - D4,E1,E2,E3,E4 - G2,G3,G4,H1,H2	U21 U29

3. APPLICATION RULES

3.1. Foreword

The board tester, built in the GE 130 console, is used for the detection of faults occurring in I.C.s and transistors on the boards of the SCM3 standard.
The fault analysis is carried out by comparison of the output signals from the board under test with the signals issued by a metallic reference board.
Mismatching of the signals, which is indication of failure occurrence, will cause one or more control lamps to light up.
On the basis of the final configuration of the lighted lamps, resulting from a sequence of successive tests, the faulty component can be identified by means of a FAULT vocabulary.

3.2. Boards removal

Boards which the error-detection program has identified as possibly faulty, must be removed from the machine with voltage off.

3.3. Switches positioning

Switch ON/OFF to be positioned on OFF
Switch O/S to be positioned on O

3.4. Board Tester ON

After power supplying the machine(GE 130)turn on board tester. Switch ON/OFF on ON.

3.5. Board Tester check

3.5.1. Right after switching on the device, a general check is advisable as indicated under par. 4 - Self-error-detection procedure.
Should,on the other hand, a quick check for the lamps efficiency be needed during operation, the following simplified procedure can be adopted (3.5.2. and 3.5.3.).

3.5.2. Switches A1, A2,....H1, H2 should be output positioned (downward). Switch O/S on O.
START-button pushing should cause all of the control lamps to light up.

REVISION Def 690312 69.02.13

3.5.3. Switches A1, A2...H1,H2 are then input positioned (upward). START-button pushing should cause all of the control lamps to go out.

3.6. Input-Output switches positioning

3.6.1. Introduce card corresponding to the board under test through into reader's slot; push START and read line "0".
This operation brings some control lamps to light up. The switches corresponding to the lighted lamps should then be turned on the output.
If switches positioning has been correctly performed, when pushing again START, all the control lamps should be off.

3.6.2. Connect then board under test to C1 and C2 connectors on the right hand of the board tester front panel.

3.6.3. After performing these operations, turn switch O/S (fig.1) on S, thus power supplying the test board.

3.7. Board test

3.7.1. Step card forward by pushing button T (fig.1) and read line 1 pressing START.
(It is essential that these operations be performed one at a time: first, reader's button T, then button START).
If the lamps remain off, the test result is considered as positive, in that either the board is not faulty or the possible failure does not affect the board operation as far as this test pattern is concerned.
Go on to subsequent test: step card one line forward (button T), press START.....etc.

3.7.2. If a failure is present on the board, one or more lamps will light up following a given test. It is then necessary to identify the number of the test pattern applied, as resulting from the reader's slot, as well as the error configuration of the 30 lamps. Location of the faulty component will be traced by consulting the FAULT vocabulary.

REVISION DATE 69.02.13

3.8. Component replacement

3.8.1. Once the faulty package has been identified, switch O/S is turned on O and the board removed.
After replacing the faulty package (see proc.300240030) with a good one, repeat test sequence all over again.
If the board is correctly repaired, the control lamps during tests 1, 2, 3.... n should remain off every time START is pushed.

3.8.2. In case of uncertainty among more packages, one package at a time should be replaced, each replacement being followed by a thorough board testing.

3.8.3. If the suspect circuit is made of discrete components, the component to be first replaced is the transistor; should thereby the failure be not eliminated, it is then necessary to check the other components.

3.9. Board Tester removal

3.9.1. Before removing the board tester, make sure that the machine power supply is off.

3.9.2. Unscrew the bolts securing reader to console. Failure to perform this operation may cause bending of the board tester panel.

3.9.3. Once removed from the console, place device on console maintainance board, taking care to avoid short-circuits on the unprotected electrical parts.

3.9.4. A short between +5 and ground causes the CPU +5 power supply to go off.

3.9.5. A short between +12 and ground or +12 and +5 causes the VAR 380 fuse to open and/or the CPU power supply to go off.

CAUTIONS:

- The START button shall be pushed only once. Exceptional cases, calling for twice pushing, are reported in the FAULT vocabulary.

- Tests should follow the sequence 0, 1, 2, 3, etc. as indicated on the card. It is not possible to go one step back and press START again. Anyway, when failing to run the right sequence, repeat testing all over again starting from 0.

- When two test cards are available for a single board, either one can be first introduced into the reader.
  Besides, the input-output connectors do not need any repositioning.
  If an error configuration is not contemplated in the FAULT vocabulary, occurrence of a short circuit on the input pins or on the connector contacts should be regarded as a possible event.
  Following is the correlation table of the C1 and C2 connector pins (fig.1) to the lamps of the VAR 380 console.

Connector C1	Lamp (progressive count from left to right)	Connector C2	Lamp (progressive count from left to right)
pin 1	1	pin 1	16
2	2	2	17
3	3	3	18
4	4	4	19
5	5	5	20
6	6	6	21
7	7	7	22
9	8	9	13
10	9	10	24
11	10	11	25
12	11	12	26
13	12	13	27
14	13	14	28
15	14	15	29
16	15	16	30

REVISIONS
DATE 6/03/12 68.02.13

S.T.
COMM A.T.
PO
APPL. PROG.

4. BOARD TESTER SELF-ERROR-DETECTION PROCEDURE

The self-error-detection procedure provides an overall test for the correct functioning of the board tester, as well as a number of symptom-to-failure interrelations apt to locate the faulty electronic component.

4.1. Test procedure

The test procedure involves some operations on the switches of the board tester console and employs as reference card the one corresponding to the NONA 2A board (n.06100484). Of this board,only configurations 1 and 6 are used. Use is also made of the connector protecting tap, which usually accomodates the test board.
Symptoms are collected on the basis of the 30 control lamps of the board tester console.
After turning on the board tester power supply (by means of switch ON/OFF), the 10-test sequence of table 1 is run.
The first column gives the test progressive number. The second + sixth columns report the operations required by the individual tests. The second column indicates whether the protection tap must be inserted (IN) or removed (OUT). The third column specifies the position of the O/S switch. The fourth column indicates the position of the 30 I/U lamps. The fifth column specifies the position of the reference card in the reader and the configuration (1 or 6) to be applied. The sixth column indicates whether the START button must be pressed (YES) or not (NO). The last column reports the signals for the correct test sequence ("1" means: all 30 lamps are on; "0" means: all 30 lamps are off).

TABLE 1

TEST	TAP	O/S	I/U	LINE	START	LAMPS
1	IN	O	U	1	YES	1
2	OUT	O	U	1	YES	O
3	OUT	O	U	6	YES	1
4	OUT	O	I	6	NO	1
5	OUT	O	I	6	YES	O
6	OUT	O	U	6	NO	O
7	OUT	O	U	6	YES	1
8	OUT	O	U	1	YES	O
9	OUT	O	I	1	NO	1
10	OUT	S	I	1	YES	O

4.2. Failure detection procedure

When the board tester operates correctly, each one of the 30 control lamps supplies the signal as reported in table 1. Failure of one or more lamps during one or more tests to com ply with the expected signal sequence, indicates occurrence of a fault in the board tester.
Following is the faulty board and faulty electronic component detection procedure, based on the symptoms observed.

Symptoms fall into three different classes:

1° type = wrong sequence for one lamp only
2° type = wrong sequence for 3 lamps
3° type = wrong sequence for more than 3 lamps.

4.2.1. 1°-Type symptoms

The lamp involved may be any one of the 30 control lamps located in the console.
Once the lamp has been identified, complete test sequence and check during which tests the lamp performs wrong.
The second row of Table 2 enables to identify the faulty board.
The third row of Table 2 groups lamps into three different classes: X, Y and Z.
For detection of a failure inside the board, the following procedure applies:

a) Select, out of the test sequences of Table 3, the wrong sequence related to the lamp in question; the wrong sequence is identifiable by the progressive numbers of the tests, during which the lamp has strayed from the correct sequence;

b) read the faulty component indication in the column corresponding to the class of the lamp being checked.

For identification of the faulty component, the conventions of the FAULT vocabulary are applicable.

S.T.

COPIE A :
TO :

IND. REV.

DATE 30/11/1968 - ef

C. Parolo

APPR.

UNITE

SERV. ING.

Programma

S.P.S.

N° 1467140050

CONT. AU FG. 20 FG. 19

TABLE 2

LAMP	A1	A2	A3	A4	B1	B2	B3	B4	C1	C2	C3	C4	D1	D2	D3	D4	E1	E2	E3	E4	F1	F2	F3	F4	G1	G2	G3	G4	H1	H2
FAULTY BOARD FULO 2A in pos.A	12	11	10	9	8	6	5	4	3	2	12	11	10	9	8	6	5	4	3	2	12	11	10	9	8	6	5	4	3	2
CLASS	X	X	X	X	X	X	X	X	X	X	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z

BOARD TESTER OPERATING RULES
VAR 380

1re APPLIC.

CONT. AU FG. 20 FG. 19

REVISION

Def 69 03 12 69.02.13

Cat. 3810 F

TABLE 3

TESTS	FAULTY COMPONENTS ON BOARD FULO 2A		
1,2,3,4,5,6,7,8,9,10	X	Y	Z
2 5 6 8 10	V04 U25 U30	V05 U28 U29	V06 U21 U26
2 8 10	U30	U28	U26
10	V07 U23	V08 U23	V09 U23
1 3 4 7 9	V04	V05	V06
9	U23 U25	U23 U29	U21 U23
1 2 8	U24 U25	U27 U29	U21 U22
2 8	U23 U24	U23 U27	U22 U23
8	U24	U27	U22
1 3 4 7	U24 U25 U30	U27 U28 U29	U21 U22 U26
3 4 7	U24 U25 U30	U27 U28 U29	U21 U22 U26
5 6	V07 U23 U25 U30	V08 U23 U28 U29	V09 U21 U23 U26
6	U25 U30	U28 U29	U21 U26
3 4	U30	U28	U26
4	U30	U28	U26
1	U30	U28	U26

4.2.2. 2°-type symptoms

This type of symptoms can be considered as a particular case of par.4.1.
It consists of the contemporary error of three lamps during test 9 (off instead of on).
In this instance it is sufficient to consult Table 2 for detection of the faulty board.
The faulty package is always in position U23.

REVISION 64.03.13 64.03.13

S.T. CONF. A.I. IND. REV.

UNIT

COMPIL.	APPR.	SEE.	N°
C. Parolo	M. Vitali	SEC. S.P.S.	146740050
EMISS. 30/11/1968 - gi		LOC. Pregnana	CONT. SU FO. 21 FO. 20

Cod. 3896126 F

4.2.3. 3°-type symptoms

These symptoms are characterized by the fact that the wrong sequence involves on the whole 15 or 30 lamps (it should be noted that the sequence may not be the same for all of the 15 or 30 lamps).
In this case the faulty board is COMA 2A in position A-7. Identification of the faulty component is drawn from Table 4:

TABLE 4

Lamps involved in the wrong sequence	Faulty components
ALL 30 LAMPS	U27 U28 U02 V03
A1 A2 A3 A4 B1 – C3 C4 D1 D2 D3 – F1 F2 F3 F4 G1	U26 U30
B2 B3 B4 C1 C2 – D4 E1 E2 E3 E4 – G2 G3 G4 H1 H2	U21 U29

		PAG.
	AGGIORNAMENTI REVISIONS	
-	INDICE - INDEX	I
	" "	II
1.	GENERALITA'	1
2.	PIASTRE CONTROLLABILI CON IL PROVA-PIASTRE	2
3.	PIASTRE CONTROLLABILI CON PROCEDURA PART.	3
3.1.	Piastra ALAM 2A	4
	" " "	5
3.2.	Piastra FILT 2B	6
3.3.	Piastra FILT 2C	7
	" " "	8
3.4.	Piastra GEMA 2A	9
	" " "	10
3.5.	Piastra LIRI	11
3.6.	Piastra TEME 2A	12
3.6.1.	Circuito TERIA	12
	" "	13
3.6.2.	Circuito GEM 6A	14
	" "	15
	" "	16
4.	PIASTRE CONTROLLABILI CON SEMPLICE CONTROLLO OHMICO	17
4.1.	Piastra NAME 2A	17
4.2.	Piastra PATE 2A	18
4.3.	Piastra PONT 2N	19
4.4.	Piastra PONT 2P	19
4.4A.	Piastra PONT 2Q	19
4.5.	Piastra RECA 2A	20
4.6.	Piastra REDI 2A	21
	" " "	22
4.7.	Piastra REIN 2A	23
5.	PIASTRE RIPARABILI PER SOSTITUZIONE	24
6.	GENERAL	25
7.	BOARDS WHICH CAN BE CHECKED WITH THE BOARD-TESTER	26
8.	BOARDS WHICH CAN BE CHECKED BY SPECIAL PROCEDURE	27
8.1.	ALAM 2A board	28
	" " "	29
8.2.	FILT 2B "	30
8.3.	FILT 2C "	31
	" " "	32

1 REVISION 1.3.69 VOLPI

	PAG.	AGGIORNAMENTI REVISIONS
8.4. GEMA 2A board	33	
" " "	34	
8.5. LIRI "	35	
8.6. TEME 2A "	36	
8.6.1. TERIA circuit	36	
" "	37	
8.6.2. GEM 6A "	38	
" "	39	
" "	40	
9. BOARDS WHICH CAN BE CHECK WITH A SIMPLE OHMIC CONTROL	41	
9.1. MAME 2A board	41	
9.2. PATE 2A "	42	
9.3. PONT 2N "	43	
9.4. PONT 2P "	43	
9.4A. PONT 2Q "	43	
9.5. RECA 2A "	44	
9.6. REDI 2A "	45	
" "	46	
9.7. REIN 2A "	47	
10. BOARDS WHICH CAN BE REPAIRED BY REPLACEMENT	48	

REVISION 1 Vedi F.V. 1.3.69

1. GENERALITA'

Le norme che seguono sono state divise in quattro sezioni a seconda che le piastre siano riparabili :

a) con il prova-piastre;

b) con procedure particolari;

c) con semplice controllo ohmico;

d) per sostituzione.

Per le piastre che rientrano nei punti b) e c) le procedure di controllo e/o individuazione del guasto richiedono unicamente l'uso del tester METRIX MOD. 430.

Le procedure che seguono sono orientate verso i guasti di tipo franco più probabili. Tranne casi particolari non vengono controllati i seguenti tipi di guasto :

- apertura condensatori;
- variazioni del valore di resistenze oltre la normale tolleranza;
- corto circuiti o interruzioni del circuito stampato.

Se non diversamente specificato i controlli si effettuano sulla piastra sfilata dalla macchina.

N.B.: le indicazioni "P.-" e "P.+" indicano i puntali del tester inseriti rispettivamente in "-o" e in + (oppure Ω).

2. PIASTRE CONTROLLABILI CON IL PROVA PIASTRE

Per il controllo delle piastre sottoelencate vedere i documenti :

"Norme d'uso del prova piastre 300740880 " e "Vocabolario Fault 40024000".

ANDO 2A	FIPA 2A	NONA 2A	UARO 2A
CAIN 2A	FILC 2A	NONE 2A	UARI 2A
CAIN 2B	INFU 2A	NONI 2A	VARI 2A
CANA 2A	INVE 2A	ORCA 2A	VARI 2B
CANA 2B	LOBO 2A	RECE 2A	VIAL 2A
CANA 2C	LOBO 2B	REGO 2A	
CISP 2A *	LOGI 2A	REG8 2A	
COFA 2A	LOGI 2B	REGU 2A	
CONT 2A	LOGI 2C	RENO 2A	
COVE 2A	LOSE 2A	REPA 2A	
DECO 2A	LOSE 2B	RESI 2A	
DEEC 2A	LOSE 2C	RIIN 2A	
DEFO 2A	LOSE 2D	SEEO 2A	
DEFO 2B	LOSE 2E	STOL 2A	
DERO 2A	LOSE 2G	TISE 2A	
DESA 2A	LOSE 2H	TISE 2B	
DESA 2B	LOSE 2L	TRIN 2A	
DESA 2C	LOSE 2M		
DEVA 2A			
ESCO 2A			

* N.B.: questa piastra viene controllata sul prova-piastre, solo per un responso di funzionamento ON-OFF. Non è ammessa la sostituzione di pack (vedi anche cap. 5).

3. PIASTRE CONTROLLABILI CON PROCEDURA PARTICOLARE.

Tali piastre sono :


ALAM 2A
FILT 2B
FILT 2C
GEMA 2A
LIRI
TEME 2A


Per ognuna di esse segue la procedura di controllo e le eventuali norme per la riparazione.

3.1. Piastra ALAM 2A

Si presuppone di avere già individuato (o con la diagnostica automatica o con procedure manuali quali l'uso del Tasto "LAMPS CHECK") l'amplificatore che non funziona, facendo eventualmente riferimento agli schemi.


Sull'amplificatore così individuato eseguire le seguenti operazioni :

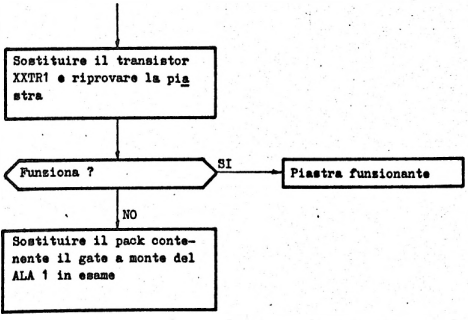

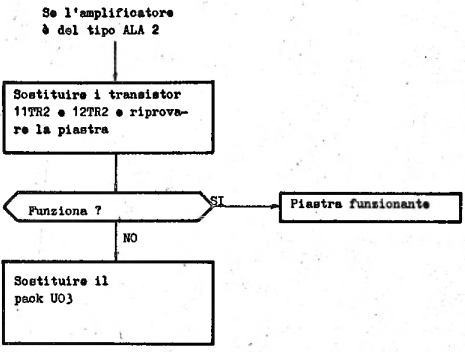
Se l'amplificatore
è del tipo ALA 2
Sostituire i transistor
11TR2 e 12TR2 e riprovare la piastra
Funziona ?
SI
Piastra funzionante
NO
Sostituire il
pack UO3


3.2. Piastra FILT 2B


Con il tester effettuare le seguenti operazioni :

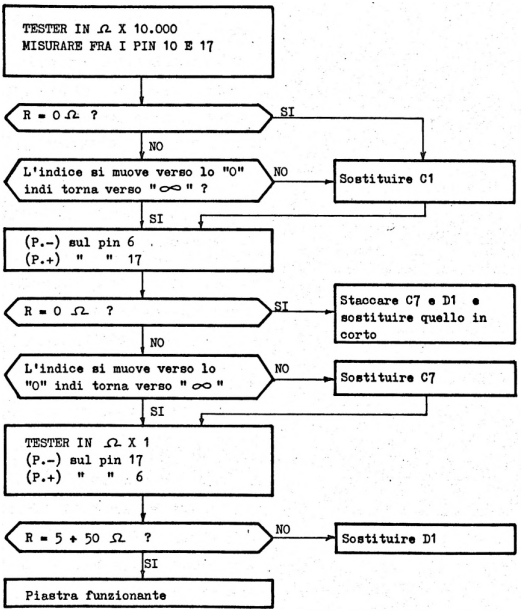

3.3. Piastra FILT 2C


Con il tester effettuare le seguenti operazioni :

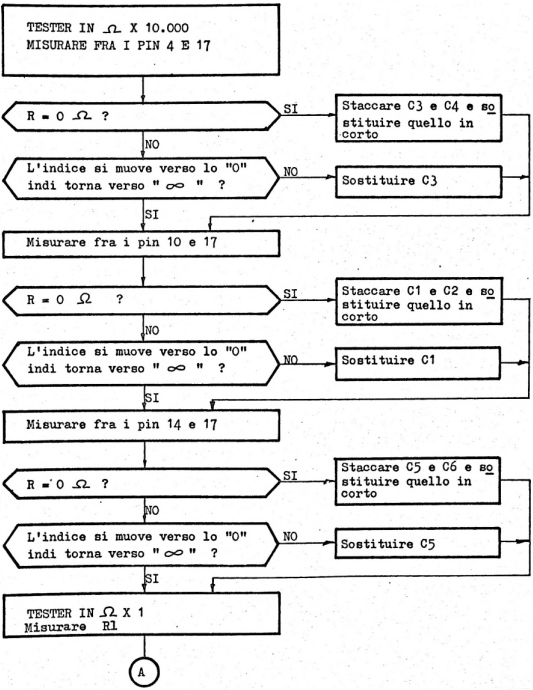

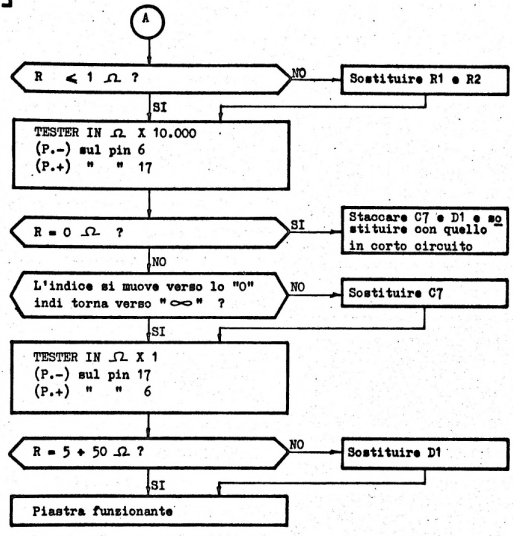
A
R ≤ 1 Ω ?
NO
Sostituire R1 e R2
SI
TESTER IN Ω X 10.000
(P.-) sul pin 6
(P.+) " " 17
R = 0 Ω ?
SI
Staccare C7 e D1 e sostituire con quello in corto circuito
NO
L'indice si muove verso lo "0" indi torna verso "∞" ?
NO
Sostituire C7
SI
TESTER IN Ω X 1
(P.-) sul pin 17
(P.+) " " 6
R = 5 ÷ 50 Ω ?
NO
Sostituire D1
SI
Piastra funzionante

3.4. Piastra CEMA 2A

Per ognuno dei 4 circuiti controllare con il tester :

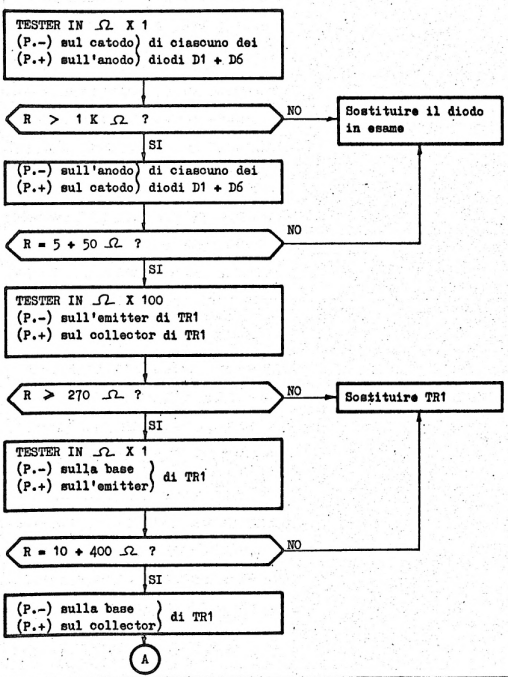


GENERAL ELECTRIC

NORME RIPARAZIONE PIASTRE UC

1ª APPLIC. GE 130

CONT. SU FO. 11 FO. 10

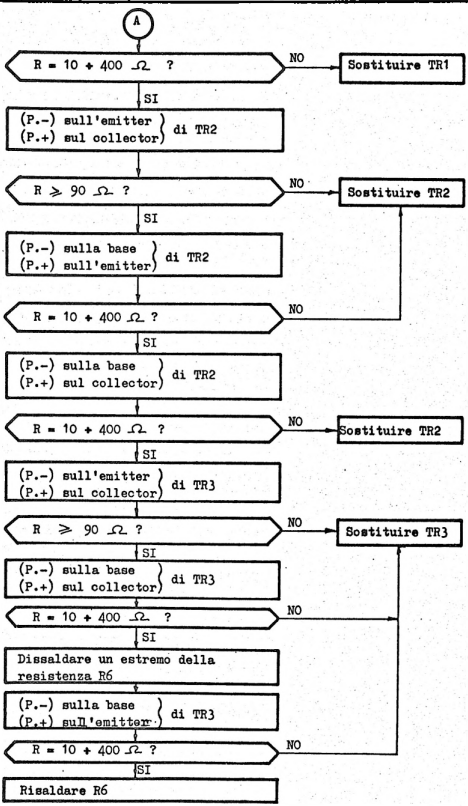


COMPIL.	UNITY	N°
K220	APPR.	SEZ. S.P.S.-I.S.I.
EMISS. 31 ottobre 1968		LOC. Pregnana
		400240010
		CONT. SU FO. 11 FO. 10

Cod. 3894138 F

3.5. Piastra LIRI

Con il tester controllare :

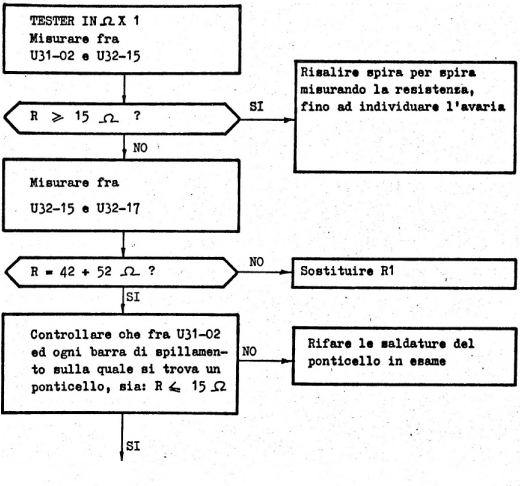

A questo punto può esserci solo una eventuale saldatura fredda su un condensatore, perciò avendo già individuato il mastro anormale, rifare tutte le saldature dei condensatori dallo spillamento relativo fino a quello precedente.

3.6. Piastra TEME 2A


Tale piastra contiene 1 circuito TERIA e 2 circuiti GEM6A.

3.6.1. Circuito TERIA


Viene di seguito indicata una procedura di rapido intervento per i guasti più probabili, predisponendo le seguenti condizioni :

a) piastra TEME 2A inserita in macchina (Q 20) con tensioni accese;
b) piastra MAME 2A con il commutatore in posizione "0";
c) piastre PIME 2A normalmente inserite.

Con il tester effettuare i seguenti controlli sul lato cablaggio della macchina :

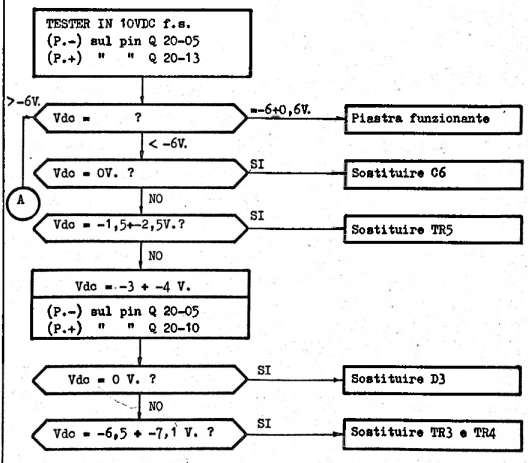

Cod. 3896128 F

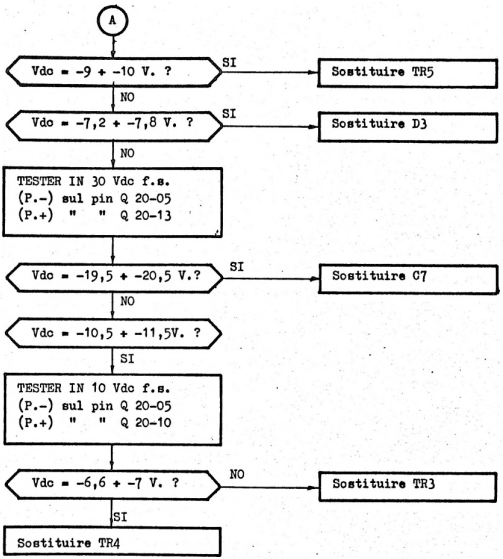

Per facilitare la diagnosi di un eventuale guasto non contemplato nel precedente ciclo di intervento, vengo no di seguito riportati i valori nominali delle tensio ni nei vari punti di misura disponibili sul connettore, con circuito funzionante correttamente.

PIN DI MISURA		VALORE NOMINALE DELLA TENSIONE
Q 20-05	Q 20-10	- 6,8 V
"	Q 20-11	- 3,3 V
"	Q 20-12	- 3,3 V
"	Q 20-13	- 6 V
Q 20-10	Q 20-11	+ 3,4 V
"	Q 20-12	+ 3,4 V
"	Q 20-13	+ 0,8 V
Q 20-11	Q 20-12	0 V
"	Q 20-13	- 2,7 V
Q 20-12	Q 20-13	- 2,7 V

3.6.2. Circuito GEM 6A

Per ciascuno dei due circuiti (VO2 e VO3) segue una procedura di rapido intervento per i guasti più probabili, predisponendo le stesse condizioni del circuito TERIA (vedi 3.6.1.) e misurando i valori sul lato cablaggio.

Per il circuito V 02 :

TESTER IN 10 Vdc f.s.
(P.-) sul pin R 20-04
(P.+) " " R 20-17

Vdc = ?
- = -6±0,5 V. → Piastra funzionante
- < -5,5 V. → Sostituire D1 e D2
- > -6,5 V.

(P.-) sul pin R 20-06
(P.+) " " R 20-17

Vdc = ?
- > -7,5 V. → Sostituire D1 e D2
- = -6,8±0,3 V.

Sostituire TR1 e TR2

(P.-) sul pin R 20-05
(P.+) " " R 20-17

Vdc = ?
- = -6±0,5 V. → Piastra funzionante
- < -5,5 V. → Sostituire D1 e D2
- > -6,5 V.


(P.-) sul pin R 20-06
(P.+) " " R 20-17

Vdc = ?
- > -7,5 V. → Sostituire D1 e D2
- = -6,8±0,3 V.

Sostituire TR1 e TR2

Cod. 3896138 F

Per il circuito V 03 :

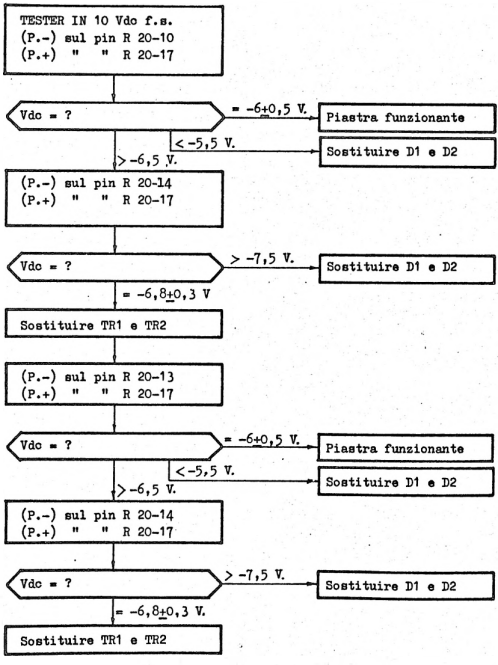

4. PIASTRE CONTROLLABILI CON SEMPLICE CONTROLLO OHMICO.

Tali piastre sono :

MAME 2A
PATE 2A
PONT 2N
PONT 2P
RECA 2A
REDI 2A
REIN 2A

4.1. Piastra MAME 2A

Controllare con il tester la continuità ohmica fra le seguenti coppie di pin :

U31-03 - U31-09

U31-11 - U32-05

U31-13 - U31-14

U31-16 - U31-15

U32-02 - U32-01

U32-03 - U32-04

U32-06 - U32-07

U32-10 - U32-09

U32-11 - U32-12

U32-13 - U32-14

U32-16 - U32-15

4.2. Piastra PATE 2A

Inserire la piastra che si vuole controllare, nella posizione di U.C. A-39.

Accendere le continue della macchina e con il tester in 10 Vdc f.s. misurare che, con il (P.-) sul pin B 39-17 e con il (P.+) sui pin sottoelencati, si legga una tensione compresa fra 3 e 4 Volt.

In caso contrario sostituire le resistenze del partitore in esame (indicate a fianco dei piedini).

PIN	PARTITORE	PIN	PARTITORE
A 39- 2	(V02)	B 39- 1	(V21)
A 39- 3	(V03)	B 39- 2	(V22)
A 39- 4	(V04)	B 39- 3	(V23)
A 39- 5	(V05)	B 39- 4	(V24)
A 39- 6	(V06)	B 39- 5	(V25)
A 39- 7	(V07)	B 39- 6	(V26)
A 39- 9	(V09)	B 39- 7	(V27)
A 39-10	(V10)	B 39- 9	(V29)
A 39-11	(V11)	B 39-10	(V30)
A 39-12	(V12)	B 39-11	(V31)
A 39-13	(V13)	B 39-12	(V32)
A 39-14	(V14)	B 39-13	(V33)
A 39-15	(V15)	B 39-14	(V34)
A 39-16	(V16)	B 39-15	(V35)
		B 39-16	(V36)

4.3. Piastra PONT 2N

Controllare con il tester in Ω x 1

a) continuità fra i pin U31-17 e U31-01
U31-17 e U31-02
U31-17 e U31-04

b) resistenza infinita fra i pin U31-17 e U31-03.

In caso contrario individuare il punto di interruzione o di corto circuito con esame visivo o ulteriori analisi della piastra.

4.4. Piastra PONT 2P

Controllare con il tester in Ω x 1

a) continuità fra i pin U31-17 e U31-01
U31-17 e U31-02
U31-17 e U31-03

b) resistenza infinita fra i pin U31-17 e U31-04.

In caso contrario individuare il punto di interruzione o di corto circuito con esame visivo o ulteriori analisi della piastra.

4.4A. Piastra PONT 2Q

Controllare con il tester in Ωx1 la continuità fra le coppie di pin:

U31-1 e U31-6
U31-2 e U31-5
U31-3 e U31-7
U31-4 e U31-17
U31-15 e U31-17

In caso contrario individuare il punto di interruzione con esame visivo o ulteriori analisi della piastra.

REVISION 1 Vol. F.V. 1.3.69

Cod. 3896128 F

4.5. Piastra RECA 2A

Controllare con il tester in Ω x100 i valori fra i pin sottoindicati, in caso di disuguaglianza sostituire la resistenza collegata al pin in esame :

PIN	PIN	Resistenza Ω	PIN	PIN	Resistenza Ω
U31-01	U31-02	500 ÷ 620	U32-01	U32-17	1080 ÷ 1320
U31-03	U31-17	1350 ÷ 1650	U32-02	U32-17	1080 ÷ 1320
U31-04	U31-17	1350 ÷ 1650	U32-03	U32-17	1080 ÷ 1320
U31-05	U31-17	1350 ÷ 1650	U32-04	U32-17	1980 ÷ 2420
U31-06	U31-17	1350 ÷ 1650	U32-05	U32-17	1980 ÷ 2420
U31-07	U31-17	1350 ÷ 1650	U32-06	U32-17	1350 ÷ 1650
U31-09	U31-17	1350 ÷ 1650	U32-07	U32-17	1350 ÷ 1650
U31-10	U31-17	1350 ÷ 1650	U32-09	U32-17	1350 ÷ 1650
U31-11	U31-17	1350 ÷ 1650	U32-10	U32-17	1350 ÷ 1650
U32-12	U31-17	1350 ÷ 1650	U32-11	U32-17	1350 ÷ 1650
U32-13	U31-17	1350 ÷ 1650	U32-12	U32-17	1350 ÷ 1650
U32-14	U31-17	1350 ÷ 1650	U32-13	U32-17	1350 ÷ 1650
U32-15	U31-17	1350 ÷ 1650	U32-14	U32-17	1350 ÷ 1650
U32-16	U31-17	1350 ÷ 1650	U32-15	U32-17	1350 ÷ 1650
			U32-16	U32-17	1350 ÷ 1650

4.6. Piastra REDI 2A

Eseguire i seguenti controlli :

a) Tester in Ω x 1
(P.-) sui pin della colonna di sinistra e
(P.+) " " " " " " destra di tabella 1, verificare che sia sempre :

R = 5 ÷ 50 Ω

in caso contrario sostituire il diodo indicato in tab.1 a fianco della coppia di pin sui quali la misura ha avuto esito negativo ;

b) Tester in Ω x 10.000
(P.-) sui pin della colonna di destra e
(P.+) " " " " " " sinistra di tabella 1, verificare che sia sempre :

R ⩾ 100 K Ω

in caso contrario sostituire il diodo indicato in tab.1 a fianco della coppia di pin sui quali la misura ha avuto esito negativo;

c) Misurare che fra le coppie di pin di tabella 2 sia sempre :

R = 10 ÷ 30 K Ω

in caso contrario sostituire la resistenza indicata a fianco della coppia di pin sui quali la misura ha avuto esito negativo.

TABELLA 1		
PIN	PIN	DIODI
U31-09	U31-03	13D1
U31-09	U31-05	09D1
U31-09	U31-06	05D1
U31-09	U31-07	01D1
U31-11	U31-12	02D1
U31-11	U31-13	06D1
U31-11	U31-15	10D1
U31-11	U31-16	14D1
U32-06	U32-02	15D1
U32-06	U32-03	11D1
U32-06	U32-04	07D1
U32-06	U32-05	03D1
U32-09	U32-10	04D1
U32-09	U32-11	08D1
U32-09	U32-12	12D1
U32-09	U32-15	16D1

TABELLA 2		
PIN	PIN	RESIST.
U31-14	U31-03	13R1
U31-14	U31-05	09R1
U31-14	U31-06	05R1
U31-14	U31-07	01R1
U31-14	U31-12	02R1
U31-14	U31-13	06R1
U31-14	U31-15	10R1
U31-14	U31-16	14R1
U32-14	U32-02	15R1
U32-14	U32-03	11R1
U32-14	U32-04	07R1
U32-14	U32-05	03R1
U32-14	U32-10	04R1
U32-14	U32-11	08R1
U32-14	U32-12	12R1
U32-14	U32-15	16R1

4.7. Piastra REIN 2A

Controllare la resistenza fra i pins sottoindicati.

Il valore nominale di tale resistenza è di 42,5 Ω.

U31-11 - U31-03
U31-11 - U31-04
U31-11 - U31-13
U32-03 - U31-12
U32-03 - U32-01
U32-03 - U32-06
U32-11 - U32-04
U32-11 - U32-15
U32-11 - U32-13

E' comunque necessario effettuare un controllo comparativo delle resistenze con quella degli altri 8 gruppi della piastrina, la differenza deve essere contenuta entro 4 Ω.

In caso contrario staccare e misurare, uno per volta (nell'ordine C1, R1, R2.....R9) i componenti, fino ad individuare quello anomalo.

5. PIASTRE RIPARABILI PER SOSTITUZIONE.

Tali piastre sono :

AMPL 2A
CISP 2A **
INIB 2A
INTE 2A
INTE 2B
PIME 2A *

*In macchina esistono due piastre PIME 2A: una in posizione Q17 ed una in posizione Q16. La prima si può sostituire normalmente. Per la seconda invece occorre, all'atto della sostituzione, riposizionare il pontiicello K sulla piastra LIRI 2B che si trova in posizione Q15, in relazione alla stampigliatura della piastra PIME, che si inserisce in Q16, come in tabella sotto :

Stampigliatura sulla PIME in Q16	Posiz. pontiicello K sulla LIRI2B in Q15
A	07-N7
B	06-N5
C	05-N5
D	04-N3
E	03-N3
F	02-N3
G	01-N3
H	R2-N3
L	R3-N3
M	R4-N3
N	R5-N5

**N.B. : la piastra CISP 2A va sostituita solo dopo averne accertato, sul prova-piastre, il non funzionamento.

6. GENERAL

The following standards have been divided in four sections according to whether boards can be repaired :

a) with board-tester;

b) with special procedures;

c) with a simple ohmic check

d) by replacement.

For the boards included in points b) and c) the procedures to check and/or detect the failure require only the use of the METRIX MOD. 430 tester.

The following procedures are oriented towards the most probable permanent faults. Except for particular cases, the following types of failures are not checked :

- capacitors opening;
- variations in the value of the resistors beyond normal tolerance;
- short circuits or interruptions of the printed circuit.

Unless otherwise specified, the controls are done on the board pulled out of the units.

NOTE: The indications "P.-" and "P.+" indicate the points of the tester inserted rispectively : in "-o" and + (or Ω).

7. BOARDS WHICH CAN BE CHECKED WITH THE BOARD-TESTER

To check the boards mentioned below, refer to documents : "Standards to use the board-tester....." and "Fault Vocabulary n. 40024000".

ANDO 2A	FIFA 2A	NONA 2A	UARO 2A
CAIN 2A	FILC 2A	NONE 2A	UARI 2A
CAIN 2B	INFU 2A	NONI 2A	VARI 2A
CANA 2A	INVE 2A	ORCA 2A	VARI 2B
CANA 2B	LOBO 2A	REGE 2A	VIAL 2A
CANA 2C	LOBO 2B	REGO 2A	
CISP 2A *	LOGI 2A	REG8 2A	
COFA 2A	LOGI 2B	REGU 2A	
CONT 2A	LOGI 2C	RENO 2A	
COVE 2A	LOSE 2A	REPA 2A	
DECO 2A	LOSE 2B	RESI 2A	
DEEC 2A	LOSE 2C	RIIN 2A	
DEFO 2A	LOSE 2D	SEBO 2A	
DEFO 2B	LOSE 2E	STOL 2A	
DERO 2A	LOSE 2G		
DESA 2A	LOSE 2H	TISE 2A	
DESA 2B	LOSE 2L	TISE 2B	
DESA 2C	LOSE 2M	TRIN 2A	
DEVA 2A			
ESCO 2A			

* NOTE: This board is checked on the board-tester, only for a ON-OFF performance check. The pack replacement is not allowed (refer also to ch.10)

8. BOARDS WHICH CAN BE CHECKED BY SPECIAL PROCEDURE

These boards are :


ALAM 2A
FILT 2B
FILT 2C
GEMA 2A
LIRI
TEME 2A


For each one of them, the control procedures and any possible standards for the repair are given.

8.1. ALAM 2A board

It is assumed that the faulty amplifier has already been detected (either with the automatic diagnostics or with manual procedures such as the use of the "LAMPS CHECH" Key), eventually referring also to diagrams.


The following operations must be performed on the amplifier thus detected.

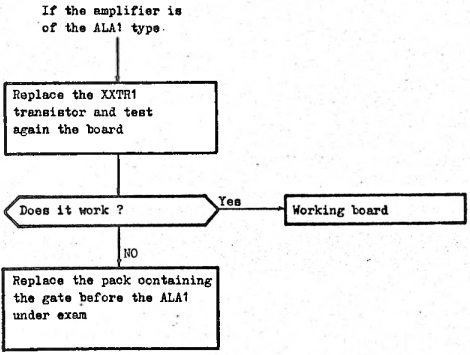

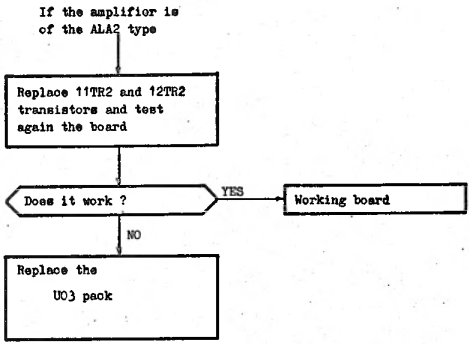
If the amplifior is of the ALA2 type
Replace 11TR2 and 12TR2 transistors and test again the board
Does it work ?
YES
Working board
NO
Replace the U03 pack


8.2. FILT 2B board


With the tester, perform the following operations :

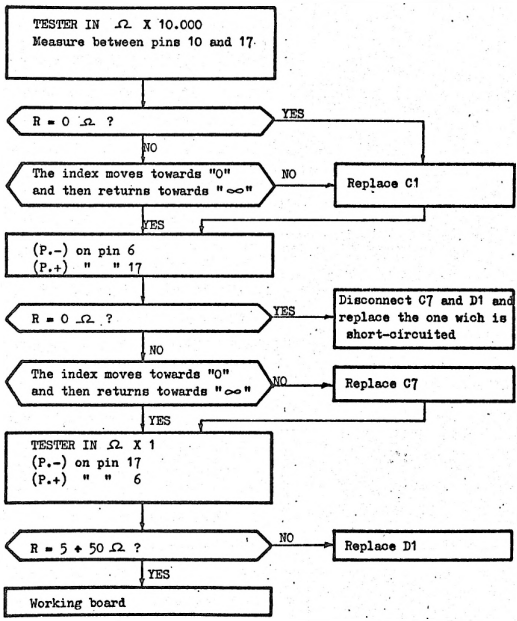

8.3. FILT 2C board


With the tester, perform the following operation :

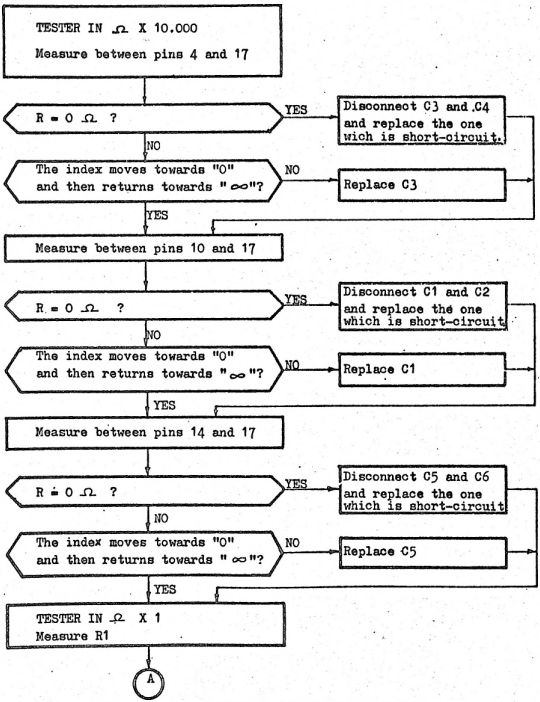


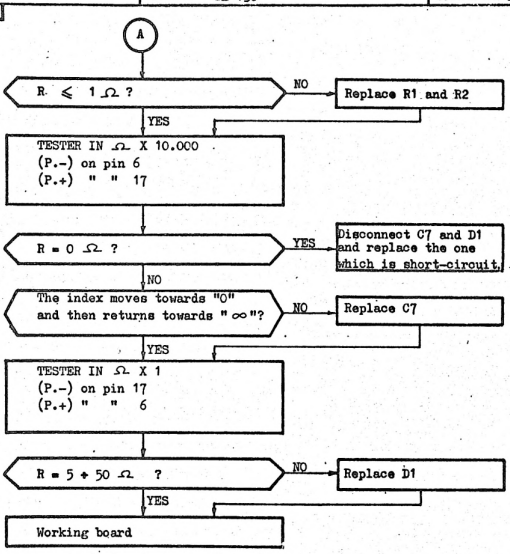
A
R ≤ 1 Ω ?
NO
Replace R1 and R2
YES
TESTER IN Ω X 10.000
(P.-) on pin 6
(P.+) " " 17
R = 0 Ω ?
YES
Disconnect C7 and D1 and replace the one which is short-circuit.
NO
The index moves towards "0" and then returns towards " ∞"?
NO
Replace C7
YES
TESTER IN Ω X 1
(P.-) on pin 17
(P.+) " " 6
R = 5 ÷ 50 Ω ?
NO
Replace D1
YES
Working board

8.4. GEMA 2A board


For each one of the 4 circuits, check with the tester :

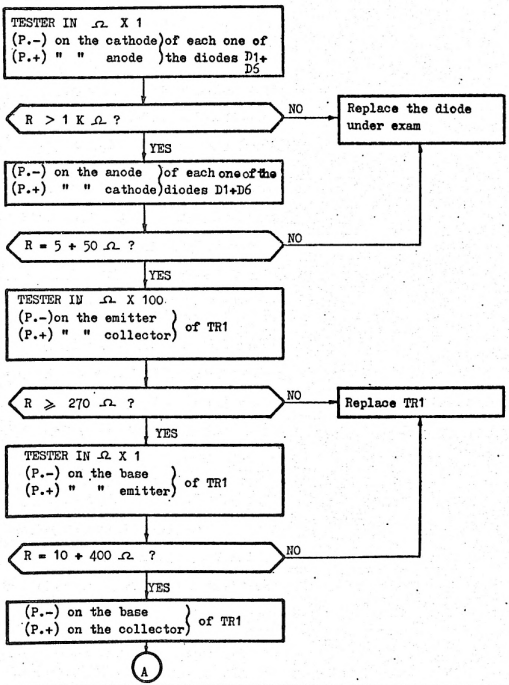

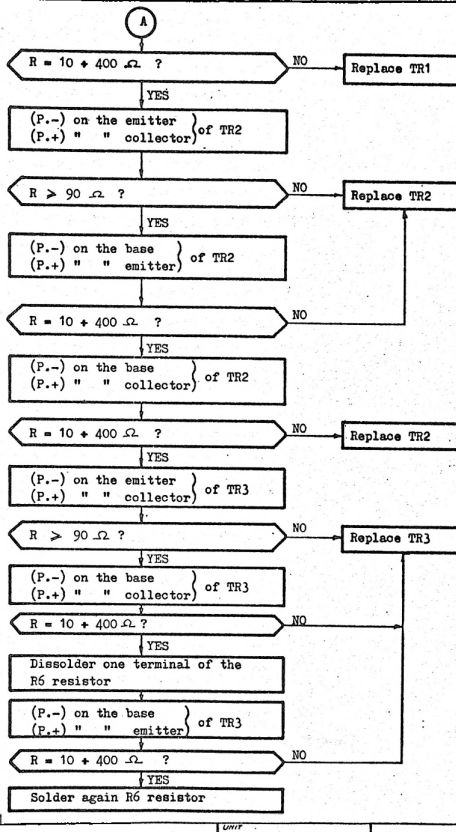
A
R = 10 ÷ 400 Ω ?
NO
Replace TR1
YES
(P.-) on the emitter
(P.+) " " collector
of TR2
R ⩾ 90 Ω ?
NO
Replace TR2
YES
(P.-) on the base
(P.+) " " emitter
of TR2
R = 10 ÷ 400 Ω ?
NO
YES
(P.-) on the base
(P.+) " " collector
of TR2
R = 10 ÷ 400 Ω ?
NO
Replace TR2
YES
(P.-) on the emitter
(P.+) " " collector
of TR3
R ⩾ 90 Ω ?
NO
Replace TR3
YES
(P.-) on the base
(P.+) " " collector
of TR3
R = 10 ÷ 400 Ω ?
NO
YES
Dissolder one terminal of the R6 resistor
(P.-) on the base
(P.+) " " emitter
of TR3
R = 10 ÷ 400 Ω ?
NO
YES
Solder again R6 resistor

8.5. LIRI board

With the tester check :

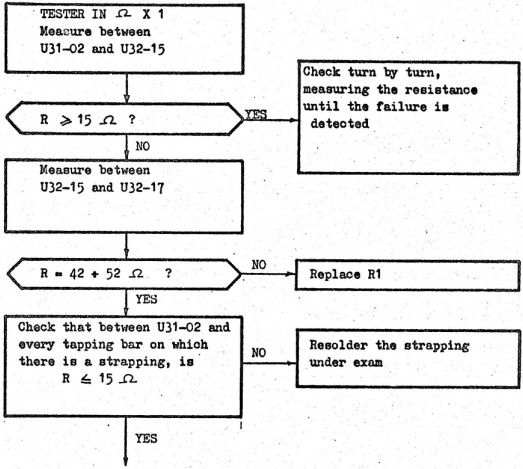

At this point there can be only one possible cold soldering on a capacitor; therefore, having already detected the abnormal pulse, do again all the solderings of the capacitors from the relative strapping the previous one.

8.6. TEME 2A board


This board containe 1 TERIA circuit and 2 GEM 6A circuits.


8.6.1. TERIA circuit

A procedure for rapid intervention on the most probable failures, is given below, preparing the following conditions:

a) TEME 2A board inserted in the machine (Q 20) with voltages on;
b) MAME 2A board whith the switch in position "0";
c) PIME 2A board normally inserted.

With the tester make the following checks on the wiring side of the machine :

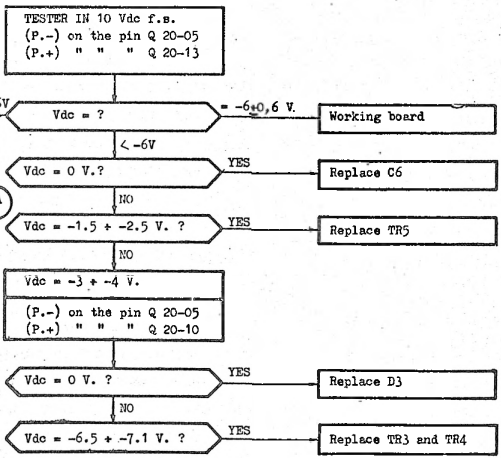

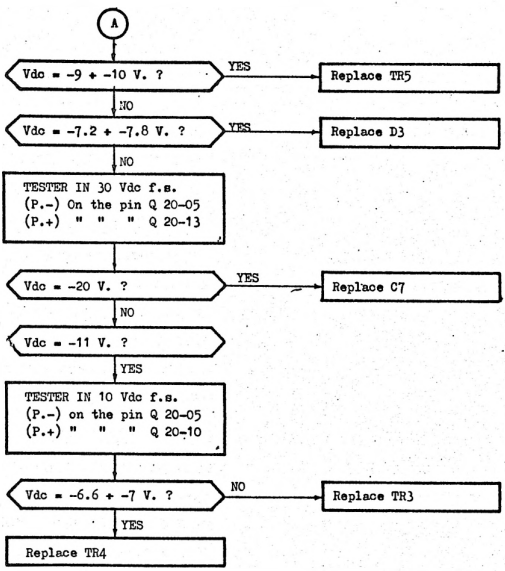


To simplify the diagnosis of a possible failure not included in the previous intervention cycle, here below are listed the nominal values of the various points of measure available on the connector, when the circuit is working correctly.

MEASURE PIN		NOMINAL VALUE OF THE VOLTAGE
Q 20-05	Q 20-10	- 6,8 V
"	Q 20-11	- 3,3 V
"	Q 20-12	- 3,3 V
"	Q 20-13	- 6 V
Q 20-10	Q 20-11	+ 3,4 V
"	Q 20-12	+ 3,4 V
"	Q 20-13	+ 0,8 V
Q 20-11	Q 20-12	0 V
"	Q 20-13	- 2,7 V
Q 20-12	Q 20-13	- 2,7 V


8.6.2. GEM 6A circuit

A rapid intervention procedure for the most probable failures is given for each one of the two circuits (V02 and V03), preparing the same conditions of the TERIA circuit (see ch. 8.6.1.) and measuring the values on the wiring side.

For the V02 circuit :

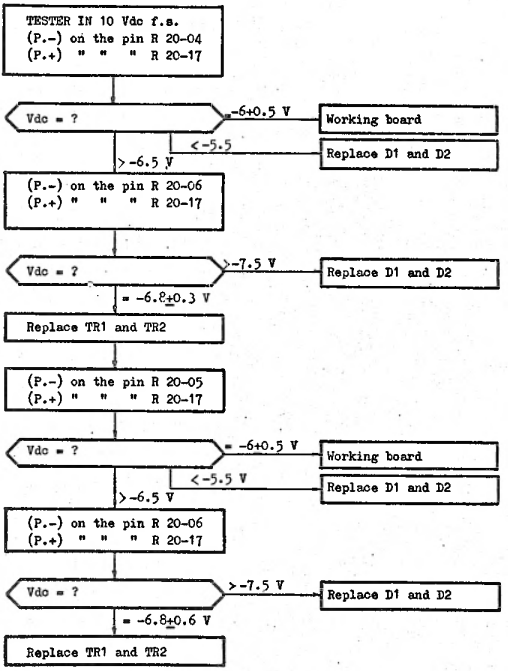

For the V03 circuit :

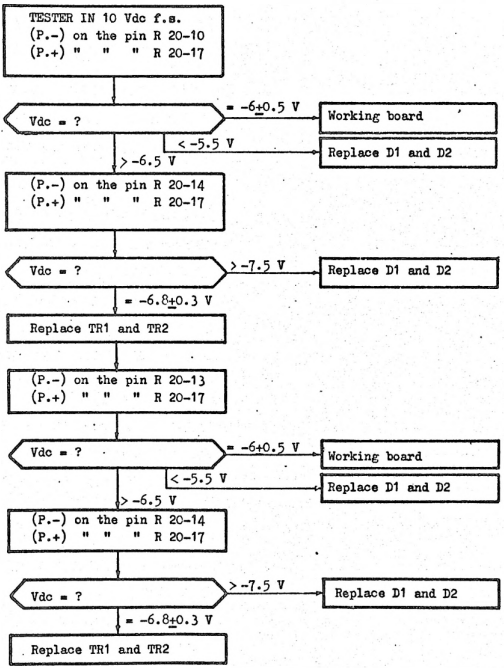

9. BOARDS WHICH CAN BE CHECK WITH A SIMPLE OHMIC CONTROL

These boards are :

MAME 2A
PATE 2A
PONT 2N
PONT 2P
RECA 2A
REDI 2A
REIN 2A

9.1. MAME 2A board

Check with the tester the ohmic continuity between the following couples of pins :

U31-03 - U31-09
U31-11 - U32-05
U31-13 - U31-14
U31-16 - U31-15
U32-02 - U32-01
U32-03 - U32-04
U32-06 - U32-07
U32-10 - U32-09
U32-11 - U32-12
U32-13 - U32-14
U32-16 - U32-15

9.2. PATE 2A board

Insert the board wich should be checked, in the CPU position A-39.

Switch ON the d.c. voltages of the machine and with the tester in 10 Vdc f.s., check that, with (P.-) on the pin B-39-17 and (P.+) on the pins listed below, a voltage inclu ded between 3 and 4 volts is read.

In the opposite case replace the resistors of the matching divider, under exam (given besides the pins)

PIN	MATCHING DIVIDER	PIN	MATCHING DIVIDER
A 39- 2	(V02)	B 39- 1	(V21)
A 39- 3	(V03)	B 39- 2	(V22)
A 39- 4	(V04)	B 39- 3	(V23)
A 39- 5	(V05)	B 39- 4	(V24)
A 39- 6	(V06)	B 39- 5	(V25)
A 39- 7	(V07)	B 39- 6	(V26)
A 39- 9	(V09)	B 39- 7	(V27)
A 39-10	(V10)	B 39- 9	(V29)
A 39-11	(V11)	B 39-10	(V30)
A 39-12	(V12)	B 39-11	(V31)
A 39-13	(V13)	B 39-12	(V32)
A 39-14	(V14)	B 39-13	(V33)
A 39-15	(V15)	B 39-14	(V34)
A 39-16	(V16)	B 39-15	(V35)
		B 39-16	(V36)

9.3. PONT 2N board

Check with the tester in Ω x 1

a) continuity between pins U31-17 and U31-01
U31-17 " U31-02
U31-17 " U31-04

b) infinite resistance between pins

U31-17 and U31-03

In the opposite case, detect the interruption or short circuit point by means of a visual examination or further analyses of the board.

9.4. PONT 2P board

Check with the tester in Ω x 1

a) continuity between pins U31-17 and U31-01
U31-17 " U31-02
U31-17 " U31-03

b) infinite resistance between pins :

U31-17 and U31-04

In the opposite case detect the interruption or short circuit point by means of a visual examination or further analyses of the board.

9.4A. PONT 2Q board

Check with the tester in Ωx1, the continuity between the pins:

U31-1 and U31-6
U31-2 " U31-5
U31-3 " U31-7
U31-4 " U31-17
U31-15 " U31-17

In the opposite case detect the interruption by means of a visual examination or further analyses of the board.

REVISION 1 Wolf F.V. 1.3.69 FW

9.5. RECA 2A board

Check with the tester in Ω x 100 the values between the pins listed below; in case of difference replace the resistor connected with the pin under exam.

PIN	PIN	RESISTOR Ω	PIN	PIN	RESISTOR Ω
U31-01	U31-02	500÷ 620	U32-01	U32-17	1080÷1320
U31-03	U31-17	1350÷1650	U32-02	U32-17	1080÷1320
U31-04	U31-17	1350÷1650	U32-03	U32-17	1080÷1320
U31-05	U31-17	1350÷1650	U32-04	U32-17	1980÷2420
U31-06	U31-17	1350÷1650	U32-05	U32-17	1980÷2420
U31-07	U31-17	1350÷1650	U32-06	U32-17	1350÷1650
U31-09	U31-17	1350÷1650	U32-07	U32-17	1350÷1650
U31-10	U31-17	1350÷1650	U32-09	U32-17	1350÷1650
U31-11	U31-17	1350÷1650	U32-10	U32-17	1350÷1650
U32-12	U31-17	1350÷1650	U32-11	U32-17	1350÷1650
U32-13	U31-17	1350÷1650	U32-12	U32-17	1350÷1650
U32-14	U31-17	1350÷1650	U32-13	U32-17	1350÷1650
U32-15	U31-17	1350÷1650	U32-14	U32-17	1350÷1650
U32-16	U31-17	1350÷1650	U32-15	U32-17	1350÷1650
			U32-16	U32-17	1350÷1650

Cod. 3941138 F

9.6. KEDI 2A board

Perform the following checks :

a) Tester in Ω x1
(P.-) on pins of the column to the left and
(P.+) " " " " " " " right of table 1 check that there is always :

$$R = 5 \div 50\ \Omega$$

In the opposite case replace the diode indicated in table 1 beside the couple of pins on which the measure has had a negative result;

b) Tester in Ω x 10.000
(P.-) on pins of the column to the right and
(P.+) " " " " " " " left of table 1 check that there is always :

$$R \geq 100\ K\ \Omega$$

In the opposite case replace the diode given in table 1 beside the couple of pins on which the measure has had a negative result;

c) check that between the couples of pins of table 2 be always:

$$R = 10 \div 30\ K\ \Omega$$

In the opposite case replace the resistor given beside the couple of pins on which the measure had had a negative result.

TABLE 1		
PIN	PIN	DIODE
U31-09	U31-03	13D1
U31-09	U31-05	09D1
U31-09	U31-06	05D1
U31-09	U31-07	01D1
U31-11	U31-12	02D1
U31-11	U31-13	06D1
U31-11	U31-15	10D1
U31-11	U31-16	14D1
U32-06	U32-02	15D1
U32-06	U32-03	11D1
U32-06	U32-04	07D1
U32-06	U32-05	03D1
U32-09	U32-10	04D1
U32-09	U32-11	08D1
U32-09	U32-12	12D1
U32-09	U32-15	16D1

TABLE 2		
PIN	PIN	RESIST.
U31-14	U31-03	13R1
U31-14	U31-05	09R1
U31-14	U31-06	05R1
U31-14	U31-07	01R1
U31-14	U31-12	02R1
U31-14	U31-13	06R1
U31-14	U31-15	10R1
U31-14	U31-16	14R1
U32-14	U32-02	15R1
U32-14	U32-03	11R1
U32-14	U32-04	07R1
U32-14	U32-05	03R1
U32-14	U32-10	04R1
U32-14	U32-11	08R1
U32-14	U32-12	12R1
U32-14	U32-15	16R1

9.7. REIN 2A board

Check the resistance between the pins mentioned below.

The nominal value of this resistance is 42.5 Ω .

U31-11 - U31-03
U31-11 - U31-04
U31-11 - U31-13
U32-03 - U31-12
U32-03 - U32-01
U32-03 - U32-06
U32-11 - U32-04
U32-11 - U32-15
U32-11 - U32-13

It is though necessary to perform a comparative control of the resistances with the one of the 8 other groups of the board; the difference must be whithin 4 Ω .

In the opposite case, detach and measure, one at a time (in the order C1, R1, R2.....R9) the components, up to when the faulty component is located.

10. BOARDS WHICH CAN BE REPAIRED BY REPLACEMENT

These boards are :

AMPL 2A
CISP 2A **
INIB 2A
INTE 2A
INTE 2B
PIME 2A*

*Two PIME 2A boards are in the machine: one in Q17 and one in Q16 position. The first one can be replaced normally; for the second one, before replacing it, change the K strapping on the LIRI 2 B board in Q15 according to the printing on the new PIME 2A, how the following table shows :

Printing on PIME 2A in Q16 position	Position of strapping K on LIRI 2B in Q15
A	07-N7
B	06-N5
C	05-N5
D	04-N3
E	03-N3
F	02-N3
G	01-N3
H	R2-N3
L	R3-N3
M	R4-N3
N	R5-N5

** NOTE: the CISP 2A board must be replaced only after its faulty performance has been proved by the board-tester.

PROCEDURA PER LA SOSTITUZIONE DEI PACKAGES CON DISSALDATORE ENDECO MOD. 100 A
PACKAGES REPLACEMENT PROCEDURE

I.T.I. 003

CONT. SU FO. 1 FO. I

INDICE - INDEX

	PAG.
A. Attrezzatura necessaria	1
B. Generalità	1
C. Dissaldatura	1
D. Saldatura	2
"	3
E. Necessary Tools	4
F. General	4
G. Desoldering	4
H. Soldering	5
"	6
- Fig. 1	7
- Fig. 2	8
- Fig. 3	9
- Fig. 4	10

AGGIORNAMENTI REVISIONS

REVISION

CONFIG. IND. RIF.

UNIT

COMPIL. Matteoli Bruno

EMISS. 27-11-68

APPR. Matteoli

SEZ. SEC. SPS-1S1

LOC. Pregnana

N° 300240030

CONT. SU FO. 1 FO. I

Cod. 3898128 F

A. ATTREZZATURA NECESSARIA

1) – Dissaldatore ENDECO mod. 100A	cod. 7144630 Y (117V) cod. 7144635 S (220V)
2) – Trasformatore 220/117 (se necessario)	cod. 5472110 U
3) – Presella a bacchi diritti	cod. 7137379 U
4) – Filo di stagno FLUITIN/S 0.6 mm.	cod. 6138106 H
5) – Solvente	cod. 4370787 E
6) – Lente ingrandimento	cod. 7262050 A
7) – Pennello	cod. 7138902 D

B. GENERALITA'

Per le operazioni di sostituzione dei packages, il tecnico deve disporre di un tavolo di lavoro disposto in una zona bene illuminata.

C. DISSALDATURA

1) – Si riscalda il dissaldatore fino a portarlo alla temperatura di regime (3 ÷ 4 minuti).
Fare attenzione che la tensione di alimentazione sia quella corretta: 117 V o 220 V a seconda del tipo.
Se necessario alimentare il dissaldatore tramite un trasformatore 220/117.

2) – Si impugna con una mano il dissaldatore e con l'altra il supporto stampato (fig. 1).

3) – Dopo aver schiacciato la peretta, si appoggia la punta del l'attrezzo alla piazzola infilando il pin corrispondente e mantenendo la punta perpendicolare alla piazzola (fig.2).

4) – Appena lo stagno si è sciolto (2 ÷ 3 secondi per supporti stampati ad una faccia e 4 ÷ 5 secondi per supporti stampati a due facce) si rilascia di scatto la peretta e si stacca la punta del dissaldatore dal supporto stampato immediatamente prima della fine dell'aspirazione.
Per i supporti stampati a due facce, durante l'aspirazione bisogna muovere l'attrezzo in modo da imprimere piccoli spostamenti al pin per agevolare l'uscita dello stagno dal

foro placcato e per trasmettere meglio il calore tramite il pin stesso. Se il foro non si liberasse bene alla prima aspirazione, non bisogna insistere, ma occorre ravvivare la saldatura prima di rifare l'operazione.

5) - Per evitare che la temperatura del package assuma valori proibitivi, si consiglia di non dissaldare tutte le piazzole di una fila consecutivamente, ma alternarle con quelle dell'altra fila, incominciando dal capo opposto.
Esempio di sequenza riferita alla numerazione dei pins del package:

1 - 8 - 2 - 9 - 14 - 7 - 13 - 6 - 3 - 10 - 12 - 5 - 4 - 11.

6) - Dopo ogni dissaldatura, per evitare l'otturazione del condotto d'aspirazione dello stagno, schiacciare la peretta accompagnando l'operazione con un colpo secco del polso dall'alto al basso in modo da espellere la massima quantità possibile di stagno dalla punta forata.

7) - Dopo aver dissaldato tutte le piazzole o fori placcati, assicurarsi mediante la presella che i pins siano del tutto liberi.

8) - Estrarre il package facendo leva nella parte inferiore con la punta della presella.

D. SALDATURA

1) - Si posiziona il package da saldare. Per il corretto posizionamento fare riferimento alla topografia della piastra.

2) - Dopo aver posto il supporto stampato su un piano, si saldano i vari pins, infilando il pin con la punta del dissaldatore e avvicinando contemporaneamente il filo di stagno (fig. 3).
Per l'esatta impugnatura del dissaldatore, vedi fig. 4.
Se il package tende a sfilarsi, bloccarlo piegando leggermente due piedini diametralmente opposti.

3) - Permarsi con la punta in posizione perpendicolare alla piazzola per 2 + 3 secondi onde permettere allo stagno di risalire nel foro placcato.

4) - Anche in questo caso si consiglia di procedere con una sequenza simile a quella indicata al punto 5 della dissaldatura.

5) - Durante l'operazione di saldatura si raccomanda di non premere la peretta per evitare di spruzzare dello stagno dall'altra parte dello stampato e provocare quindi possibili corto circuiti fra pins.
Per la stessa ragione si raccomanda di non usare troppo stagno.

6) - Dopo la saldatura pulire il supporto stampato con il solvente indicato (Alcool Isopropilico) o un solvente equivalente, aiutandosi con un pennello.

7) - Utilizzando la lente di ingrandimento, verificare:
- la corretta esecuzione delle saldature;
- l'assenza di cortocircuiti sullo stampato dovuti a baffi di stagno;
- l'integrità dello stampato specialmente nei punti di attacco alle piazzole.

N O T A: Per non avere un rapido deterioramento della punta occorre attenersi alle seguenti prescrizioni:

1. - Non tenere acceso l'attrezzo per più di mezz'ora.

2. - Non sostituire più di quattro packages alla volta.

E. NECESSARY TOOLS

1) Model 100 A ENDECO Desolder	code	7144630 Y (117V) " 7144635 S (220V)
2) 220/117 Transformer (if necessary)	"	5472110 U
3) Straight burners fuller	"	7137379 U
4) 0.6 mm. FLUITIN/S tin wire	"	6138106 H
5) Solvent	"	4370787 E
6) Magnifying lens	"	7262050 A
7) Brush	"	7138902 D

F. GENERAL

The technician must have a work table avialable, set in a well lit zone, for the paclage replacement operations.

G. DESOLDERING

1) - The desolder is heated until it has reached the working temperature (3 to 4 minutes). Check for correct power supply voltage: 117 V or 220 V depending on the type.
If necessary, supply the desolder through a 220/117 transformer.

2) - The desolder is held in one hand and printed board in the other (Fig.1).

3) - After having squeezed the depress bulb, the point of the tool is laid on the pad inserting the corresponding pin, and maintaining the point perpendicular to the pad (Fig.2).

4) - As soon as the tin is melted (2 to 3 seconds dof one-sided printed boards and 4 to 5 seconds for two-sided printed boards), the depress bulb is released rapidly and the point of the desolder is taken away from the printed board immediately before the end of the suction.
For the two-sided printed boards, during suction, the tool must be moved in order to impress small movements to the pin to facilitate the outcoming of the tin from the plated hole and to better transfer the heat through the pin itself.
If the hole is not cleaned completely at the first suction,

it is necessary to renew the soldering before performing again the operation.

5) - It is advisable not to desolder all the pads of one row one after the other in sequence, but to alternate them with the ones of the other row, starting from the opposite side, in order to avoid an excessive overheating of the package. An example of the sequence referred to the package pins number is the following:

1 - 8 - 2 - 9 - 14 - 7 - 13 - 6 - 3 - 10 - 12 - 5 - 4 - 11.

6) - After every desoldering, in order to avoid that the tin suction duct be closed, squeeze the depress bulb accompanying the operation with a rapid movement of the wrist downwards so that the maximum possible quantity of tin is blown out of the hollow point.

7) - After having desoldered all the pads or plated holes, check by means of the fuller that the pins are completely free.

8) - Take out the package levering on its lower part with the point of the fuller.

H. SOLDERING

1) - The package to be soldered is fitted. refer to the board topography for the correct fitting.

2) - After having set the printed board on a table, the various pins are soldered, inserting the point of the desolder on the pin and simultaneously setting near the tin wire (fig. 3).
For the exact gripping of the desolder, refer to fig.4.
If the package has the tendency to fall off, block it by slightly bending two opposite pins.

3) - Maintain the point perpendicularly to the pad for 2 to 3 seconds to allow the tin to flow in the plated hole.

4) - Also in this case, it is advisable to proceed with a sequence similar to the one given under par.5 of Desoldering.

5) - During soldering operations, it is recommended not to squeeze the depress bulb to avoid to spray the tin on the other side of the printed board and hence cause possible shortcircuits among the pins.

For this reason it is recommended not to use too much tin.

6) - After the desoldering, clean the printed board with the indicated solvent (Isopropylic alcohol) or an equivalent solvent, with the help of a brush.

7) - With the magnifying lens check:
- the correct execution of solderings;
- the absence of shortcircuits on the printed boards due to tin smears;
- the integrity of the printed circuit especially in the points of connection to the pads.

NOTE: It is necessary to comply with the following rules, not to spoil the point rapidly:

1. - Do not keep the tool switched on for more than half an hour.

2. - Do not replace more than four packages at a time.

PROCEDURA PER LA SOSTITUZIONE DEI PACKAGES CON DISSALDATORE ENDECO MOD. 100 A

1ª APPLIC.

I.T.I. 003

CONT. SU FO. 8 FO. 7

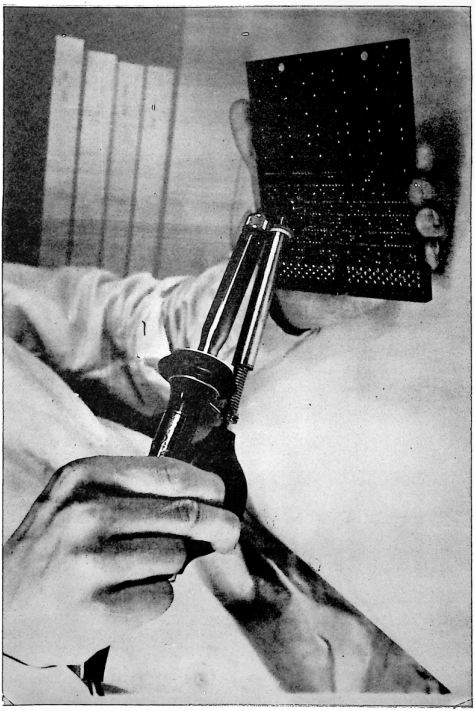


FIG. 1

ARRIVEDERCI

COMPIL. Mattarelli Bruno	APPR.	UNIT	N° 300240030
EMISS. 27-11-68		SEZ. SPS - 151	CONT. SU FO. 8 FO. 7
		SEC.	
		LOC. Pregnana	

Cod. 3996126 F

	PROCEDURA PER LA SOSTITUZIONE DEI PACKAGES CON DISSALDATORE ENDECO MOD. 100 A 1ª APPLIC.	I.T.I. 003 CONT. SU FO. 9 FO. 8

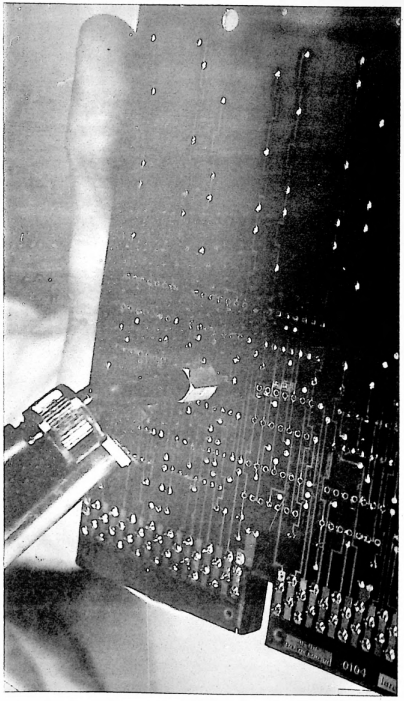


FIG. 2

REVISION

ST	COMPIL. Mattarelli Bruno	UNITÀ	Nº 300240030	
	EMISS. 27-11-68	SEZ. SPS - 151 SEG. LOC. Pregnana	CONT. SU FO. 9	FO. 8

Cod. 3896128 F

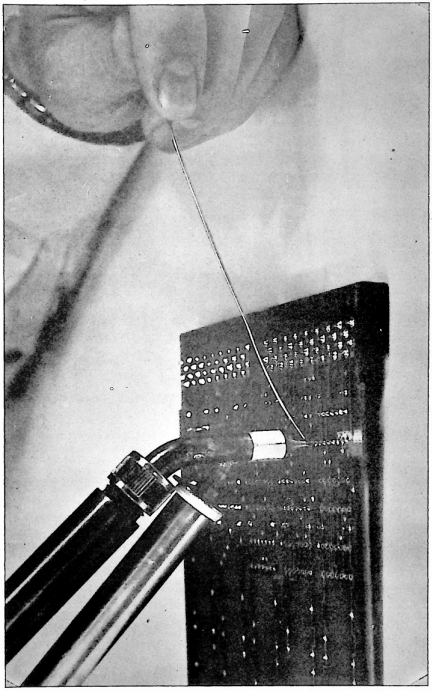


FIG. 3

	PROCEDURA PER LA SOSTITUZIONE DEI PACKAGES CON DISSALDATORE ENDECO MOD. 100 A 1ª APPLIC.	I.T.I. 003 CONT. SU FO. / FO. 10

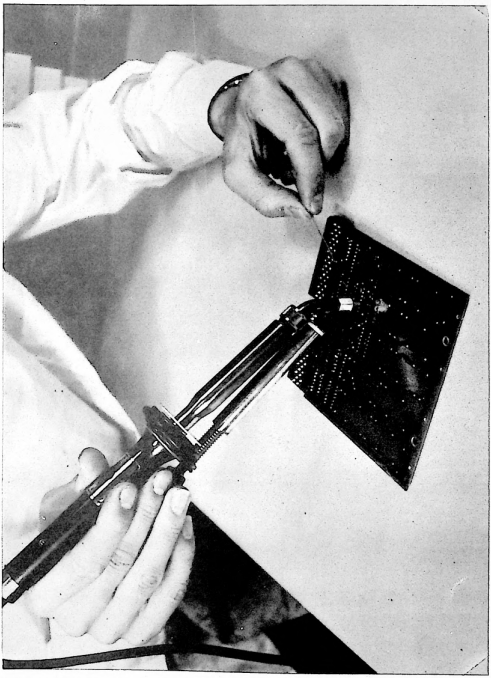


FIG. 4

ST

COMPIL. Hattorell - Bruno	APPR. Bobek	UNIT SEZ. SPS - 151 SEC. LOC. Cinisello	N° 300240030 CONT. SU FO. 1 FO. 10
EMISS. 27-11-68			

COMP. A:
FO.:
IND. REV.

REVISION

INDICE - INDEX

1. Sottosistema Oggetto - Referred Subsystem pag. II

2. Introduzione " III
2.1. Descrizione
2.2. Consultazione
2.3. Procedure speciali

3. Introduction " VII
3.1. Description
3.2. Consulting
3.3. Special procedures

4. Elenco Piastre - List of Boards " XI

Piastre-Boards " 1÷876

1. Sottosistema Oggetto - Referred Subsystem

Sottosistema oggetto - Referred subsystem :

UCE 460, cod. 0646529 G

Documento richiamato - Referred Document :

DISTINTA PIASTRINE-BOARD LIST, N° DIS.-DRAW N° : 140248842

2. Introduzione

2.1. Descrizione

Il Vocabolario Fault costituisce lo strumento di diagnosi delle piastre della U.C. GE-130 trattate dal prova-piastre.

Esso riporta l'elenco ordinato dei sintomi ricavabili mediante il prova-piastre, associati al componente elettronico guasto.

2.1.1. Le piastre trattate dal presente Vocabolario sono disposte in ordine alfabetico.

2.1.2. Ad ogni piastra è dedicato un numero di pagine pari al numero di prove necessarie per la diagnosi della piastra stessa.

2.1.3. Su ogni pagina, accanto alla dicitura "PIASTRA-BOARD" è riportato il nome della piastra ed il codice di identificazione quale risulta stampigliato sul tettuccio della stessa.

2.1.4. Accanto alla dicitura "PROVA-TEST" viene indicato il numero progressivo della configurazione di prova.

Qualora il numero di prove necessario per la diagnosi di una piastra sia superiore a 20, l'identificazione di piastra presenta il carattere distintivo I per le prime 20 prove ed il carattere distintivo II per le successive prove, numerate ripartendo da 1.

2.1.5. Sotto alla dicitura "CONFIGURAZIONI D'ERRORE-FAULTY PATTERNS" vengono elencate le configurazioni di lampadini accesi/spenti che si possono rilevare sul provapiastre durante l'applicazione della configurazione di prova.

Ogni configurazione viene suddivisa in otto gruppi (sette di 4 ed uno di 2) ordinati sotto altrettante colonne A÷H, coerentemente con il raggruppamento e la denominazione dei lampadini sulla console del prova-piastre.

Il lampadino spento viene indicato con un punto.
Il lampadino acceso viene indicato con un numero (da 1 a 4).

Tutte le configurazioni vengono ordinate come numeri binari decrescenti dall'alto al basso, secondo la convenzione :

- lampadino acceso E2 = peso massimo
- lampadino acceso A1 = peso minimo.

2.1.6. Accanto a ciascuna delle configurazioni di errore sono elencati sotto la dicitura "GUASTI-FAULTS" tutti i componenti che con un loro guasto possono provocare tale configurazione.

Detti componenti sono individuati con la stessa simbologia adottata negli schemi topografici di piastra. In particolare con la terna di caratteri UXX ($01 \leq XX \leq 30$) si indica il package di C.I., e con VXX si indica il circuito a componenti discreti.

Lo schema topografico è riportato sul foglio nº 1 di ogni disegno di piastre nello standard SCMJ.

2.2. Consultazione.

Il Vocabolario Fault viene consultato per ottenere la localizzazione del guasto in base alla configurazione di errore riscontrata in corrispondenza di una data configurazione di prova.

2.2.1. Procedura.

a) Individuare la pagina del Vocabolario corrispondente alla piastra ed al numero della configurazione di prova, quale risulta indicata sulla scheda metallica all'atto dell'applicazione della configurazione stessa.

b) Individuare fra tutte le possibili configurazioni di errore riportate sulla pagina quella letta sui lampadini del prova-piastre.

c) Se accanto alla configurazione d'errore risulta indicato un solo componente, la prova si considera completata e si procede alla sostituzione del componente indicato.

d) Se accanto alla configurazione d'errore risultano indicati più componenti, procedere all'applicazione delle configurazioni di prova successive.

e) Eseguire man mano che si procede l'intersezione fra le indicazioni dei componenti date dalle singole prove al fine di ottenere una riduzione del numero dei componenti sospetti (vedi esempio in par. 2.2.2.).

f) Se al termine di una delle successive intersezioni il numero dei componenti si riduce ad uno, vale quanto detto al punto c).

g) Se la prova è giunta al termine e l'elenco dei componenti sospetti contiene ancora più di un nome, procedere alla sostituzione dei componenti uno alla volta, provando la piastra ad ogni sostituzione effettuata, finchè non risulti che la piastra è stata riparata.

2.2.2. Esempio di intersezione.

La piastra in prova sia la REPA 2A.

Alla prova 1 si è acceso il lampadino H2: il Vocabolario indica come componenti sospetti U08, U09 e U30.

Si passa alle prove successive.

Le prove 2 e 3 non danno alcuna indicazione di errore.

Alla prova 4 si è acceso il lampadino H1: il Vocabolario indica i componenti U08 e U30. Mediante intersezione, il numero dei componenti sospetti si riduce a 2.

La prova 5 non dà indicazione di errore.

Alla prova 6 si è acceso il lampadino H1: il Vocabolario indica i componenti U08, U09, U10 e U15. Mediante intersezione il numero dei componenti sospetti si riduce a 1 (U08).

La diagnosi è completata: si procede alla sostituzione del package U08.

2.3. Procedure speciali.

2.3.1. Piastre speciali.

Per le piastre FILC 2A, INFU 2A e TRIN 2A occorre premere il tasto START due volte, per ottenere la corretta indicazione dai lampadini.

2.3.2. Configurazioni d'errore particolari.

Per alcune piastre, si può eccezionalmente riscontrare durante la prova una configurazione d'errore non prevista nell'elenco ordinato secondo il par. 2.1.5.

In tal caso in fondo all'elenco delle configurazioni di errore, viene riportata una configurazione contenente delle X in corrispondenza dei lampadini interessati alla configurazione non prevista. In tal modo si intende indicare una qualsiasi combinazione di lampadini accesi/spenti fra quelli contrassegnati dalle X.

Associati a tale configurazione compaiono i nomi dei componenti sospetti.

Esempio : se alla prova 1 della piastra FIFA 2A risultano accesi i lampadini D3 e F1, è possibile dedurre dall'ultima riga delle configurazioni di errore che il package guasto è U19 (vedi di pag. 326).

3. INTRODUCTION

3.1. Description

The Fault Dictionary is the means to diagnose the boards of the GE 130 C.P.U. treated by the board-tester. It gives the orderly list of the symptoms which can be detected by the board-tester, associated to the faulty electronic component.

3.1.1. The boards examined by the present Dictionary are listed in alphabetical order.

3.1.2. A number of pages equal to the number of tests required to diagnose the board is dedicated to each board.

3.1.3. On every page, near the label "PIASTRA-BOARD" the name of the board and its identification code is given, as if shows on the cover of the board itself.

3.1.4. Near the label "PROVA-TEST" the progressive number of the test configuration is given.
Should the number of tests required to diagnose a board be above 20, the board identification presents the distinctive character I for the first 20 tests and the distinctive character II for the following tests - numbering them again from 1.

3.1.5. Under the label "CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS" there are the configurations of the lit/not lit bit lamps which can be noted on the board-tester during the application of the test configuration.
Every configuration is divided in eight groups (seven of 4 and one of 2) listed under the same number of columns A through H, coherently with the grouping and the labeling of the bit lamps on the board-tester console.
The not lit bit lamp is indicated with a point.
The lit lamp is indicated with a number (from 1 to 4).
All the configurations are listed as decreasing binary numbers from the top to the bottom, according to the agreement:

- H2 bit lamp lit = maximum significance bit

- A1 bit lamp lit = maximum significance bit

3.1.6. All the components which with their own failure can cause such a configuration are listed besides each one of the faulty patterns under the label "GUASTI-FAULTS". These components are detected by means of the same symbols adopted on the boards topographic diagrams. In particular, the three characters UXX ($01 \leqslant XX \leqslant 30$) label the I.C. package and VXX labels the circuit with discrete components. The topographic diagram is given on sheet No. 1 of every drawing of boards in the SCM3 standard.

3.2. Consulting

The Fault Dictionary is consulted in order to detect the fault according to the Faulty Pattern noted in correspondence with a given test pattern.

3.2.1. Procedure

a) Locate the page of the Dictionary corresponding to the board and to the number of the test pattern, as given on the metallic card at the moment of the application of the pattern itself.

b) Locate, among all the possible faulty patterns given on the page, the one read on the bit lamps of the board-tester.

c) If, besides the faulty pattern, there is only one component, the test can be considered as completed and the indicated component can be replaced.

d) If, besides the faulty pattern, there are several components, it is necessary to proceed with the application of the following test configurations.

REVISION

e) Perform, as you go on, the intersection between the indications of the components given in the individual tests in order to obtain the reduction of the number of suspect components (refer to example in paragraph 3.2.2.).

f) If at the end of one of the following intersections the number of the components is reduced to one, refer to what mentioned in sub-point c).

g) If the test is at the end and the list of suspect components contains still more than one name, proceed to the replacement of the components one at a time, testing the board after every replacement, until the board does not result as being repaired.

3.2.2. Example of intersection

The board under test be REPA 2A.
During test 1 the bit lamp H2 was lit: the Vocabulary gives as suspect components U08, U09 and U30.
The following tests are performed.
Tests 2 and 3 do not give any error indication.
During test 4 the bit lamp H1 was lit: the Vocabulary indicates the components U08 and U30 as suspect.
By means of intersection, the number of components is reduced to 2.
Test 5 gives no error indication.
During test 6, the lamp H1 was lit: the Vocabulary gives U08, U09, U10 and U15 as suspect components. By means of the intersection the number of suspect components is reduced to 1 (U08).
The diagnosis is completed: the package U08 is replaced.

3.3. Special procedures

3.3.1. Special boards

For boards FILO 2A, INFU 2A and TRIN 2A it is necessary to press START twice to obtain the correct indication of the bit lamps.

3.3.2. Special error configurations

For some boards, exceptionally an error configuration not provided for in the list organized as mentioned in paragraph 3.1.5. can be detected.
In this case, at the end of the error configuration list, there is a configuration containing some X in correspondence of the bit lamps interested to the not planned configuration. By this means,we intend to indicate any possible combination of lit/not lit bit lamps among those signed with X.
The names of the suspect components are associated to this configuration.

Example: if during test 1 of the FIFA 2A board, the lamps D3 and F1 are lit, it is possible to obtain from the last line of the error configurations that the defective package is U19 (refer to page 326).

4. Elenco Piastre - List of Boards

Piastra-Board	pag.
ANDO 2A	1
CAIN 2A	6
CAIN 2B	26
CANA 2A	51
CANA 2B	76
CANA 2C	91
CISP 2A	101
COFA 2A	106
CONT 2A I	116
CONT 2A II	136
COVE 2A	151
DECO 2A I	171
DECO 2A II	191
DEEC 2A	201
DEFO 2A	216
DEFO 2B	226
DERO 2A I	236
DERO 2A II	256
DESA 2A	266
DESA 2B	276
DESA 2C	286
DEVA 2A	296
ESCO 2A	311
FIFA 2A	326
FILC 2A	341
INFU 2A	346
INVE 2A	366
LOBO 2A	371
LOBO 2B	376
LOGI 2A	381
LOGI 2B	401
LOGI 2C	411
LOSE 2A	416
LOSE 2B	431
LOSE 2C	441
LOSE 2D	451

Piastra-Board	pag.
LOSE 2E	461
LOSE 2G	471
LOSE 2H	481
LOSE 2L	491
LOSE 2M	496
NONA 2A	501
NONE 2A	506
NONI 2A	516
ORCA 2A	531
RECE 2A	551
REGO 2A	571
REG8 2A	586
REGU 2A	596
RENO 2A	606
REPA 2A	626
RESI 2A	641
RIIN 2A	651
SEBO 2A	656
STOL 2A	676
TISE 2A	701
TISE 2B I	721
TISE 2B II	741
TRIN 2A	761
UARI 2A I	776
UARI 2A II	796
UARO 2A	816
VARI 2A	836
VARI 2B	851
VIAL 2A	861

PIASTRA-BOARD ANDO 2A 0610001 E

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
..3.	....	....	....	..34	1...	....	..	U06
....	....	....	....	....	1...	....	..	U01 U06
....	....	....	....	...4	....	....	..	U03 U06
....	....	....	....	..3.	....	....	..	U03 U06
....	....	....	.2.4	12..	....	....	..	U08
....	....	....	....	.2..	....	....	..	U05 U08
....	....	....	....	1...	....	....	..	U05 U08
....	....	....	...4	....	....	....	..	U07 U08
....	....	....	.2..	....	....	....	..	U07 U08
..3.	....	....	....	....	....	....	..	U01 U06

REVISION DEF 19590 25.9.61 A

COPIE A: IND. REV.

UNIT K270

COMPIL. GF 425

APPR.

SEZ. SPS - OGE

LOC. PREGNANA (MI)

EMISS. AUG 1.1960

N^a 400240000

CONT. SU FO. 2 FO. 1

PIASTRA-BOARD ANDO 2A 0610001 E

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
..3.	....	....	....	....	1...	....	..	U01
....	....	....	....	....	1...	....	..	U01
....	....	....	....	..34	....	....	..	U03
....	....	....	....	...4	....	....	..	U03
....	....	....	....	..3.	....	....	..	U03
....	....	....	....	12..	....	....	..	U05
....	....	....	....	.2..	....	....	..	U05
....	....	....	....	1...	....	....	..	U05
....	....	....	.2.4	....	....	....	..	U07
....	....	....	...4	....	....	....	..	U07
....	....	....	.2..	....	....	....	..	U07
..3.	....	....	....	....	....	....	..	U01

REVISION

COPIE A:
TO:
NO.
REV.

PIASTRA-BOARD ANDO 2A 0610001 E

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1...	....	..	U01
....	....	....	....	...4	....	....	..	U03
....	....	....	....	..3.	....	....	..	U03
....	....	....	....	.2..	....	....	..	U05
....	....	....	....	1...	....	....	..	U05
....	....	....	...4	....	....	....	..	U07
....	....	....	.2..	....	....	....	..	U07
.3.	....	....	....	....	....	....	..	U01

REVISION

COPIE A: TO:
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEC: SPS - OGE

LOC: PREGNANA (MI)

N° 400240000

EMISS. AUG 1, 1968

PIASTRA-BOARD ANDO 2A 0610001 E

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.3.	....	....	....	....	1...	....	..	U01
....	....	....	....	....	1...	....	..	U01 U06
....	....	....	....	.34	....	....	..	U03
....	....	....	....	...4	....	....	..	U03 U06
....	....	....	....	.3.	....	....	..	U03 U06
....	....	....	....	12..	....	....	..	U05
....	....	....	....	.2..	....	....	..	U05 U08
....	....	....	....	1...	....	....	..	U05 U08
....	....	....	.2.4	....	....	....	..	U07
....	....	....	...4	....	....	....	..	U07 U08
....	....	....	.2..	....	....	....	..	U07 U08
.3.	....	....	....	....	....	....	..	U01 U06

REVISION

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

VOCABOLARIO FAULT
FAULT DICTIONARY

I^a APPLIC. GE 130

PIASTRA-BOARD CAIN 2A 0610207 A
K10003N

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	.2..	....	...4	1...	...4	..	U26
1...	....	.2..	....	....	1...	...4	..	U26
1...	....	.2..	....	...4	....	...4	..	U21
....	....	.2..	....	...4	....	...4	..	U21
....	....	.2..	....	....	....	...4	..	U21
1...	....	....	....	....	....	...4	..	U21
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	...4	12..	....	..	U18
....	....	....	....	....	.2..	....	..	U18 U23
1...	....	.2..	....	...4	1...	....	..	U26
1...	....	.2..	....	....	1...	....	..	U26
....	....	....	....	....	1...	....	..	U18 U22 U26
....	....	.2..	....	...4	....	....	..	U21
1...	....	....	....	...4	....	....	..	U21
....	....	....	....	...4	....	....	..	U18
....	....	.2..	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U21
X...	....	.X..	....	...X	X...	..XX	..	U21 U26

REVISION

COPIE A:
IND. REV.

UNIT K270

COMPIL. GE 425
EMISS. AUG 1.1968
APPR.
SEZ. SEC. SPS - OGE
LOC. PREGNANA (MI)
N° 40024000 1
CONT. SU FO. 7 FO. 6

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	...4	1...	..34	..	U26
1...	....	.2..	....	...4	....	..34	..	U21
....	....	.2..	....	...4	....	..34	..	U21
1...	....	.2..	....	....	....	..34	..	U21
1...	....	....	....	....	....	..34	..	U21
....	....	....	....	....	....	..34	..	U20 U21 U25 U30
....	....	....	....	....	....	...4	..	U20
1...	....	....	....	...4	1...	..3.	..	U26
1...	....	.2..	....	...4	....	..3.	..	U21
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	.2..	....	..	U18 U23
....	....	....	....	...4	....	....	..	U18
....	....	....	....	....	1...	....	..	U18 U22
....	....	....	....	...4	....	....	..	U18
....	....	.2..	....	....	....	....	..	U21 U24 U28
1...	....	....	....	....	....	....	..	U21 U26 U27
X...	....	.X..	....	...X	X...	..XX	..	U21 U26

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	...4	....	...4	..	U21 U26
....	....	.2..	....	....	....	...4	..	U21
....	....	....	....	....	....	...4	..	U19 U20 U21 U25 U29 U30
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	...4	.2..	....	..	U18
....	....	....	....	....	.2..	....	..	U18 U23
1...	....	....	....	....	1...	....	..	U26 U27
....	....	....	....	....	1...	....	..	U18 U22 U26 U27 U28
....	....	.2..	....	...4	....	....	..	U21
....	....	....	....	...4	....	....	..	U18 U24 U26
1...	....	.2..	....	....	....	....	..	U21
....	....	.2..	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U21 U27
X...	....	.X..	....	...X	X...	..XX	..	U20 U21 U26 U30

COPIE A:
IND. REV.

REVISION

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	..	U26
....	....	2...	....	....	....	..34	..	U21
....	....	2...	....	....	....	..34	..	U21
....	....	....	....	....	....	..34	..	U21
....	....	....	....	....	....	..34	..	U19 U20 U21 U25 U29 U30
....	....	....	....	....	....	...4	..	U19 U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	...4	12..	....	..	U18
....	....	....	....	....	2...	....	..	U18 U23 U27
....	....	....	....	....	1...	....	..	U26
....	....	....	....	....	1...	....	..	U18 U22
....	....	....	....	...4	....	....	..	U18 U28
....	....	2...	....	....	....	....	..	U21
....	....	2...	....	....	....	....	..	U21
....	....	....	....	....	....	....	..	U21
X...	....	.X..	....	...X	XX..	..XX	..	U20 U21 U25 U26 U30

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	.2..	....	...4	1...	...4	..	U26
....	....	.2..	....	...4	....	...4	..	U20 U21 U25 U29 U30
1...	....	....	....	...4	....	...4	..	U21
....	....	....	....	...4	....	...4	..	U21
....	....	....	....	....	....	...4	..	U19 U20 U25
....	....	....	....	....	12..	....	..	U18
....	....	....	....	....	.2..	....	..	U18 U23 U27
....	....	.2..	....	....	1...	....	..	U22 U26 U27 U28 U18
....	....	....	....	....	1...	....	..	U24 U28
....	....	.2..	....	...4	....	....	..	U18 U19 U24 U29
....	....	....	....	...4	....	....	..	U21 U28
....	....	.2..	....	....	....	....	..	U21 U26 U27
1...	....	....	....	....	....	....	..	
X...	....	.X..	....	...X	XX..	..XX	..	U20 U21 U25 U26 U30

REVISION

COPIE A: TO:
IND. REV.

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1 1968

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 40024000 1

CONT. SU FO. 11 FO. 11

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	.2..	....	...4	....	...4	..	U21
....	....	....	....	...4	....	...4	..	U21 U25 U26 U29 U30
....	....	....	....	....	....	...4	..	U19 U20 U25 U29 U30
1...	....	.2..	....	...4	....	..3.	..	U21
....	....	....	....	...4	....	..3.	..	U20 U24 U25 U28 U29 U30
....	....	....	....	....	....	..3.	..	U19
....	....	.2..	....	....	12..	....	..	U27
....	....	....	....	....	.2..	....	..	U18 U23 U27
1...	....	.2..	....	....	1...	....	..	U26 U27
....	....	.2..	....	....	1...	....	..	U22 U27
....	....	....	....	...1	1...	....	..	U18
....	....	....	....	...4	....	....	..	U18
....	....	.2..	....	....	....	....	..	U21 U28
1...	....	....	....	....	....	....	..	U21
X...	....	.X..	....	...X	XX..	..XX	..	U20 U21 U25 U26 U30

REVISION

COPIE A:
IND.
INT.

COMPIL. GE 425	APPR.	UNIT A270	
EMISS. AUG 1,1968		SEZ. SEC. LOC. SPS - OGE PREGNANA (MI)	N° 40024000 1 CONT. SU FO. 12 FO. 11

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	...4	....	...4	..	U29
....	....	.2..	....	....	....	...4	..	U21
....	....	....	....	....	....	...4	..	U19 U20 U21 U25 U26 U29 U30
1...	....	.2..	....	...4	.2..	..3.	..	U27
1...	....	.2..	....	...4	....	..3.	..	U21 U26 U27
....	....	....	....	...4	....	..3.	..	U20 U24 U25 U28 U29 U30
....	....	....	....	....	....	..3.	..	U19 U20
....	....	....	....	....	12..	....	..	U27
....	....	....	....	....	.2..	....	..	U18 U23
....	....	....	....	....	1...	....	..	U18 U22
....	....	....	....	...4	....	....	..	U18
....	....	2..	....	....	....	....	..	U21 U28
1...	....	....	....	....	....	....	..	U21
X...	....	.X..	....	...X	.X..	..XX	..	U20 U21 U25 U30

REVISION

COPIE A:
TO:
IND. REV.

COMPIL. GE 425	APPR.	UNIT K270	
EMISS. AUG 1.1968		SEZ. SEC. SPS - OGE LOC. PREGNANA (MI)	N° 40U24000 1 CONT. SU FO. 13 FO. 12

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = B

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	.2..	....	...4	....	..34	..	U21
....	....	....	....	...4	....	..34	..	U19 U20 U21 U25 U26 U29 U30
....	....	....	....	....	....	..34	..	U29
....	....	....	....	....	....	...4	..	U20
....	....	....	....	...4	....	..3.	..	U24 U25 U28 U29 U30
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	12..	....	..	U27
1...	....	.2..	....	....	.2..	....	..	U27
....	....	....	....	....	.2..	....	..	U18 U23
....	....	....	....	...4	1...	....	..	U18
....	....	....	....	....	1...	....	..	U18 U22 U27 U28
....	....	....	....	...4	....	....	..	U18
1...	....	.2..	....	....	....	....	..	U21 U26 U27
1...	....	.2..	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U21
....	....	.X..	....	...X	.X..	..XX	..	U20 U25 U30

REVISION

COPIE A: IND. REV. TO:

UNIT K270

COMPIL. GE 425 APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

N° 40024000 1

EMISS. AUG 1,1968

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	.2..	....	....	....	..34	..	U21
....	....	....	....	....	....	..34	..	U19 U20 U25 U29 U30
....	....	.2..	....	...4	....	...4	..	U21
....	....	....	....	...4	....	...4	..	U19 U20 U21 U25 U26 U29 U30
....	....	....	....	....	....	...4	..	U19 U20
....	....	....	....	....	....	..3.	..	U19
1...	....	....	....	....	12..	....	..	U27
....	....	....	....	....	.2..	....	..	U18 U23 U27
1...	....	....	....	....	1...	....	..	U26 U27
....	....	....	....	....	1...	....	..	U18 U22 U27
....	....	....	....	...4	....	....	..	U18 U19 U20 U24 U25 U28 U29 U30
....	....	.2..	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U21
....	....	....	....	...X	....	..XX	..	U20 U30

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	.2..	....	....	1...	...4	..	U26 U27
1...	....	....	....	....	....	...4	..	U21
....	....	....	....	....	....	...4	..	U19 U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	.2..	....	..	U18 U23
1...	....	.2..	....	...4	1...	....	..	U26
....	....	....	....	...4	1...	....	..	U18
....	....	....	....	....	1...	....	..	U18 U22
1...	....	.2..	....	...4	....	....	..	U21
....	....	.2..	....	...4	....	....	..	U21
1...	....	....	....	...4	....	....	..	U21
....	....	....	....	...4	....	....	..	U18
....	....	.2..	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U21
....	....	....	....	...X	....	..XX	..	U20 U30

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	.2..	....	....	1...	...4	..	U26
1...	....	.2..	....	....	....	...4	..	U21
1...	....	....	....	....	....	...4	..	U21
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	.2..	....	..	U18 U23
....	....	....	....	...4	1...	....	..	U18
1...	....	.2..	....	....	1...	....	..	U26 U27
....	....	....	....	....	1...	....	..	U18 U22 U28
....	....	....	....	...4	....	....	..	U18
1...	....	.2..	....	....	....	....	..	U21
1...	....	.2..	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U21
X...	....	.X..	....	...X	....	..XX	..	U21

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	.2..	....	...4	....	...4	..	U21
....	....	....	....	...4	....	...4	..	U19 U20 U21 U25 U26 U30
....	....	....	....	....	....	...4	..	U20 U27
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	.2..	....	..	U18 U23
1...	....	....	....	....	1...	....	..	U26 U27
....	....	....	....	....	1...	....	..	U18 U22 U26 U27 U28
....	....	....	....	...4	....	....	..	U18 U20 U25 U28
1...	....	.2..	....	....	....	....	..	U21
....	....	.2..	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U21
X...	....	.X..	....	...X	X...	..XX	..	U26

COPIE A: TO: IND. REV.

REVISION

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	.2..	....	....	1...	..34	..	U26 U27
1...	....	.2..	....	....	....	..34	..	U21
....	....	....	....	....	....	..34	..	U19 U20 U25 U30
....	....	.2..	....	...4	....	...4	..	U21
....	....	....	....	...4	....	...4	..	U19 U20 U21 U25 U26
....	....	....	....	....	....	...4	..	U19 U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	.2..	....	..	U18 U23
....	....	....	....	....	1...	....	..	U18 U22 U26 U27 U28
....	....	....	....	...4	....	....	..	U18 U20 U25 U28 U30
....	....	.2..	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U21
X...	....	.X..	....	...X	XX..	..XX	..	U20 U25 U26 U30

REVISION

COPIE A:
IND. FO.
IND. REV.

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	.2..	....	....	1...	...4	..	U27
....	....	.2..	....	...4	....	...4	..	U21
....	....	....	....	...4	....	...4	..	U19 U20 U21 U25 U26
1...	....	.2..	....	....	....	...4	..	U21 U26 U27
....	....	....	....	....	....	...4	..	U19 U20 U25 U30
....	....	....	....	....	.2..	....	..	U18 U23
....	....	....	....	...4	1...	....	..	U18
....	....	....	....	....	1...	....	..	U18 U22 U27
....	....	....	....	...4	....	....	..	U18 U20 U25 U28 U30
....	....	.2..	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U21
....	....	.X..	....	...X	.X..	..XX	..	U20 U25 U30

REVISION

COPIE A:
IND.
INCL.

UNIT 1278

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

N° 40024000 1

EMISS. AUG 1,1966

CONT. SU FO. 20 FO. 19

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	.2..	....	....	1...	...4	..	U27
....	....	.2..	....	...4	....	...4	..	U21
....	....	....	....	...4	....	...4	..	U19 U20 U21 U25 U26
1...	....	.2..	....	....	....	...4	..	U21 U26 U27
....	....	....	....	....	....	...4	..	U19 U20 U25 U30
....	....	....	....	....	.2..	....	..	U18 U23
....	....	....	....	...4	1...	....	..	U18
....	....	....	....	....	1...	....	..	U18 U22 U26 U27 U28
....	....	....	....	...4	....	....	..	U18 U20 U25 U28 U30
....	....	.2..	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U21
....	....	.X..	....	...X	.X..	..XX	..	U20 U25 U30

REVISION

COPIE A:
I.D.
R.V.

PIASTRA-BOARD CAIN 2A 0610207 A

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	.2..	....	...	1...	...4	..	U26 U27
....	....	.2..	....	...4	....	...4	..	U21
....	....	....	....	...4	....	...4	..	U19 U20 U21 U25 U26
1...	....	.2..	....	...	....	...4	..	U21 U26
....	....	....	....	...	....	...4	..	U19 U20 U25 U30
....	....	....	....	...	.2..	....	..	U18 U23
....	....	....	....	...	1...	....	..	U18 U22 U27 U28
....	....	....	....	...4	....	....	..	U18 U20 U25 U28 U30
....	....	.2..	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U21
....	....	.X..	....	...X	.X..	..XX	..	U20 U25 U30

COPIE A: TO:
REVISION
REV.

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1 1968

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

N° 400240001

CONT. SU FO. 26 FO. 21

PIASTRA-BOARD CAIN 28 0610004 B

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	V01
....	....	....	....	....	....	..3.	..	V02
....	....	....	....	....	....	.2..	..	U30
....	....	...4	....	....	1...	....	..	U14
....	....	....	....	....	1...	....	..	U14
....	....	....	....	...4	....	....	..	U14 U17
....	....	....	...4	1...	....	....	..	U15
....	....	....	....	1...	....	....	..	U15
....	....	....	...4	....	....	....	..	U15
...4	....	....	..3.	....	....	....	..	U18 U23
....	....	....	..3.	....	....	....	..	U13 U18
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18

REVISION

PIASTRA-BOARD CAIN 28 0610004 B

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...4	....	....	..3.	....	....	..3.	.2	U18 U19 U23
....	....	....	..3.	....	....	..3.	.2	U13 U18
....	....	....	..3.	....	....	....	.2	U13
....	....	....	....	....	....	....	.2	U20 V01
....	....	....	....	....	....	..3.	..	U13 U20 V02
....	....	....	....	1...	....	.2..	..	U30
....	....	...4	....	....	....	.2..	..	U30
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	...4	1...	....	..	U26
....	....	....	....	....	1...	....	..	U14 U16 U22 U26
....	....	....	....	...4	....	....	..	U14 U17 U26
....	....	....	....	1...	....	....	..	U14 U15 U19
....	....	....	...4	....	....	....	..	U15 U19 U24 U25 U29
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18

PIASTRA-BOARD CAIN 28 0610004 B

PROVA-TEST n° 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
-								
....	....	....	....	....	....	....	.2	V01
....	....	....	....	....	....	..3.	..	V02
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	...4	1...	....	..	U16 U26
....	....	...2	....	....	1...	....	..	U14 U16 U17 U22 U26
...4	....	....	..34	...4	....	....	..	U23
....	....	....	..34	...4	....	....	..	U18
...4	....	....	..3.	...4	....	....	..	U18 U23
....	....	...4	....	...4	....	....	..	U14
....	....	....	....	...4	....	....	..	U14 U16 U17 U19 U21 U26
....	....	....	...4	1...	....	....	..	U14 U19 U30
....	....	....	....	1...	....	....	..	U14 U15
...4	....	....	..34	....	....	....	..	U19 U24 U25
....	....	....	...4	....	....	....	..	U15 U19 U24 U25 U28 U29
...4	....	....	..3.	....	....	....	..	U23 U24 U25 U28
....	....	....	..3.	....	....	....	..	U13
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18

REVISION

COPIE N°
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

BEZ. SPS - OGE
LOC. PREGNANA (MI)

N° 400240000

EMISS. AUG 1-1968

PIASTRA-BOARD CAIN 2B 0610004 B

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...	....	....	....	....	....	....	.2	V01
...4	....	....	...4	...4	....	...3	..	U18 U23
...	....	....	...4	...4	....	...3	..	U18
...4	....	....	....	...4	....	...3	..	U18 U19 U23
...4	....	....	...4	....	....	...3	..	U24 U25
...	....	....	...3	....	....	...3	..	U13
...4	....	....	....	....	....	...3	..	U18 U19 U23 U24 U25 U28
...	....	....	....	....	....	...3	..	U13 U20 V02
...	....	....	....	....	....	..2	..	U30
...	....	....	....	...4	....	....	..	U16 U26
...	....	....	....	....	....	....	..	U14 U16 U17 U22 U26
...	....	....	....	...4	....	....	..	U14 U16 U17 U21 U26
...	....	....	...4	....	....	....	..	U14 U19 U30
...	....	....	....	....	....	....	..	U14 U15
...	....	....	...4	....	....	....	..	U15 U19 U24 U25 U28 U29
...	....	....	..3.	....	....	....	..	U13
...	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18 U25

REVISION

COPIE A FO.
TUBI NEV.

PIASTRA-BOARD CAIN 28 0610004 B

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
							2	V01
						3		U20 V02
						2		U30
4				4				U18 U19 U23
				4				U16 U18 U23 U26
					1			U14 U16 U17 U22 U26
4			4	4				U24
		4		4				U14
4				4				U18 U19 U24 U25 U28
				4				U14 U16 U17 U21 U23 U26
4				1				U14 U15 U19 U30 U15
				1				U15 U25 U29
4			4					U15 U19 U24 U25 U29
			4					U13
			3					U14 U30
		4						U18 U23 U24 U25 U28 U29
4								

REVISION

PIASTRA-BOARD CAIN 2B 0610004 B

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U20 V01
...4	....	....	..3.	...4	1...	..3.	..	U23
...4	....	....	....	...4	1...	..3.	..	U18
....	....	....	....	...4	1...	..3.	..	U18 U19 U23 U26
....	....	....	....	....	1...	..3.	..	U22 U26
...4	....	....	..34	...4	....	..3.	..	U19 U24 U25
...4	....	....	..3.	...4	....	..3.	..	U18 U24 U25 U28
...4	....	....	..3.	1...	....	..3.	..	U14 U15 U19 U30
...4	....	....	..34	....	....	..3.	..	U15 U25 U29
...4	....	....	..3.	....	....	..3.	..	U18 U23 U24 U25 U28 U29
....	....	....	....	....	....	..3.	..	U13 U20 V02
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	...4	1...	....	..	U16
....	....	....	....	....	1...	....	..	U14 U16 U17 U22
...4	....	....	..3.	...4	....	....	..	U18 U19
....	....	...4	....	...4	....	....	..	U14
....	....	....	....	...4	....	....	..	U14 U16 U17 U21 U23 U26
....	....	....	....	1...	....	....	..	U15
....	....	....	...4	....	....	....	..	U15 U19 U24 U25 U29
....	....	....	..3.	....	....	....	..	U13
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18

REVISION

COPIE A:
IND.
TO:

UNIT. K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

EMISS. AUG 1,1968

N° 400240000

CONT. SU FO. 32 FO. 31

PIASTRA-BOARD CAIN 2B 0610004 B

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	V01
....	....	....	....	....	....	..3.	..	V02
....	....	....	....	....	....	.2..	..	U30
...4	....	....	..34	....	1...	....	..	U18 U23
....	....	....	...4	....	1...	....	..	U19 U23
...4	....	....	..3.	....	1...	....	..	U23
....	....	....	..3.	....	1...	....	..	U18
....	....	....	....	....	1...	....	..	U14 U16 U17 U21 U22 U26 U27
....	....	....	....	1..4	....	....	..	U14 U15 U19 U30
1..4	....	....	...4	...4	....	....	..	U15 U18 U23 U25 U28 U29
....	....	....	....	...4	....	....	..	U14 U16 U17 U21 U24 U25 U26 U28 U29
....	....	....	....	1...	....	....	..	U15
...4	....	....	..34	....	....	....	..	U24 U25 U28
....	....	....	...4	....	....	....	..	U15 U18 U19 U24 U25 U28 U29
...4	....	....	..3.	....	....	....	..	U18 U19 U23 U24 U25 U29
....	....	....	..3.	....	....	....	..	U13
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18

REVISION

COPIE A: TO:
REV.

PIASTRA-BOARD CAIN 28 0610004 B

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	V01
...4	....	....	...4	....	....	..3.	..	U18 U19 U24 U25 U28
....	....	....	..3.	....	....	..3.	..	U13
...4	....	....	....	....	....	..3.	..	U18 U19 U23 U24 U25 U29
....	....	....	....	....	....	..3.	..	U13 U20 V02
....	....	....	....	....	....	.2..	..	U30
...4	....	....	...4	....	1...	....	..	U18 U19 U23
...4	....	....	....	....	1...	....	..	U18 U23
....	....	....	....	....	1...	....	..	U14 U16 U17 U18 U21 U22 U26 U27
....	....	....	....	1..4	....	....	..	U14 U15 U19 U30
....	....	....	...4	...4	....	....	..	U15 U18 U23 U25 U28 U29
....	....	....	....	...4	....	....	..	U14 U16 U17 U21 U24 U25 U26 U28 U29
....	....	....	....	1...	....	....	..	U15
...4	....	....	...4	....	....	....	..	U25
....	....	....	...4	....	....	....	..	U15 U18 U19 U24 U25 U28 U29
....	....	....	..3.	....	....	....	..	U13
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18

PIASTRA-BOARD CAIN 2B 0610004 B

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..3.	....	....	....	.2	U13
....	....	....	....	....	....	....	.2	U20 V01
....	....	....	....	....	....	..3.	..	V02
....	....	....	....	....	....	.2..	..	U30
...4	....	....	...4	....	1...	....	..	U18 U19 U23 U29
....	....	....	...4	....	1...	....	..	U18 U19 U24 U25 U28
....	....	....	....	....	1...	....	..	U14 U16 U17 U21 U22 U24 U26 U27
....	....	....	...4	1..4	....	....	..	U14 U15 U19 U30
....	....	....	...4	...4	....	....	..	U18 U23 U24 U25 U28 U29
....	....	....	....	...4	....	....	..	U14 U15 U16 U17 U21 U25 U26 U29
....	....	....	....	1...	....	....	..	U15
...4	....	....	...4	....	....	....	..	U18 U19 U28
....	....	....	...4	....	....	....	..	U15 U19 U25
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18 U19 U24 U25 U29

REVISION

COPIE A: TO: IND. REV.

PIASTRA-BOARD CAIN 28 0610004 B

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
							2	V01
4						3		U18 U28
			4			3		U18 U19
			3			3		U13
4						3		U19 U24 U25 U29
						3		U13 U20 V02
						2		U30
4			4		1			U18 U19 U23 U29
			4		1			U18 U23 U24 U25 U28
					1			U14 U16 U17 U19 U21 U22 U24 U25 U26 U27
			4	4				U14 U15 U19 U30
			4	4				U18 U23 U24 U25 U28 U29
				4				U14 U15 U16 U17 U21 U25 U26 U29
				1				U15
			4					U15 U19 U25
			3					U13
		4						U14 U30
4								U18

REVISION

COPIE A:
IND. TO:
REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEG.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

PIASTRA-BOARD CAIN 2B 0610004 B

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...4	....	....	..34	....	1...	....	..2	U18 U19 U23 U28
...4	....	....	..34	1..4	....	....	..2	U15
...4	....	....	..34	...4	....	....	..2	U18 U23 U25 U28 U29
...4	....	....	..3.	...4	....	....	..2	U14 U15 U19 U24 U25 U28 U29 U30
....	....	....	..3.	....	....	....	..2	U13
....	....	....	....	....	....	....	..2	U13 U20 V01
....	....	....	....	....	....	....	..	U20 V02
...4	....	....	..34	....	1...	....	..	U18 U19 U24 U25 U28 U29
....	....	....	...4	....	1...	....	..	U18 U23 U24 U25 U28
...4	....	....	..3.	....	1...	....	..	U28
...4	....	....	....	....	1...	....	..	U18
....	....	....	....	....	1...	....	..	U14 U16 U17 U18 U19 U21 U22 U23 U24 U25 U26 U27 U29
....	....	....	....	...4	....	....	..	U14 U16 U17 U21 U26
....	....	....	....	1...	....	....	..	U15 U30
....	....	....	...4	....	....	....	..	U15 U25
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18

REVISION

PIASTRA-BOARD CAIN 2B 0610004 B

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	V01
....	....	....	....	....	....	.3.	..	V02
....	....	....	....	....	....	.2.	..	U30
...4	....	....	..34	....	1...	....	..	U18 U19 U23 U24 U25 U28 U29
...4	....	....	...4	....	1...	....	..	U18 U23 U24 U25 U28
...4	....	....	..3.	....	1...	....	..	U28
...4	....	....	....	....	1...	....	..	U18
....	....	....	....	....	1...	....	..	U14 U16 U17 U18 U19 U21 U22 U23 U24 U25 U26 U27 U29
...4	....	....	..34	1..4	....	....	..	U15
...4	....	....	..34	...4	....	....	..	U18 U23 U25 U28 U29
...4	....	....	..3.	...4	....	....	..	U14 U15 U19 U24 U25 U28 U29 U30
....	....	....	....	...4	....	....	..	U14 U16 U17 U21 U26
....	....	...4	....	1...	....	....	..	U14
....	....	....	....	1...	....	....	..	U14 U15 U30
....	....	....	...4	....	....	....	..	U15 U25
....	....	....	..3.	....	....	....	..	U13
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18

REVISION

COPIE AI FO.
IND. REV.

UNIT K270

COMPIL. GE 425 APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

PIASTRA-BOARD CAIN 28 9610064 B

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
							2	V01
			34		1	3		U18 U19 U23 U24 U25 U28 U29
			4		1	3		U18 U19 U23 U24 U25 U28
4			3		1	3		U26
4					1	3		U18
					1	3		U16 U17 U18 U19 U21 U22 U23 U24 U25 U26 U27 U29
4			34	4		3		U15
4			34	4		3		U18 U23 U25 U28 U29
4			3	4		3		U14 U15 U19 U24 U25 U28 U29 U30
4				4		3		U23
						3		U13 U20 V02
						2		U30
					1			U14 U16 U17 U22
				4				U14 U16 U17 U21 U26
		4		1				U14
				1				U14 U15 U19 U30
			4					U15
			3					U13
		4						U14 U30
4								U18

REVISION

COPIE A: LO: IND. REV.

PIASTRA-BOARD CAIN 28 0610084 B

PROVA-TEST # 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	V01
....	....	....	....	....	....	.3..	..	V02
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	...4	....	....	..	U14 U15 U19 U30
....	....	....	...4	...4	....	....	..	U15 U25 U29
....	....	....	....	...4	....	....	..	U14 U16 U17 U18 U21 U23 U24 U25 U28 U29
....	....	...4	....	....	....	....	..	U14
....	....	....	....	....	....	....	..	U14 U16 U17 U22 U26 U27
....	....	....	....	...4	....	....	..	U14 U17 U26
....	....	....	....	....	....	....	..	U15
....	....	....	...4	....	....	....	..	U15 U19 U24 U25 U28 U29
...4	....	....	.3..	....	....	....	..	U18 U19 U23 U28 U29
....	....	....	.3..	....	....	....	..	U13 U18
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18

PIASTRA-BOARD CAIN 2B 0610004 B

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	V01
....	....	....	.3..	....	....	..3.	..	U23
....	....	....	....	....	....	..3.	..	U18 U20 V02
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	1..4	1...	....	..	U14 U15 U19 U30
....	....	....	...4	...4	1...	....	..	U15 U25 U29
....	....	....	....	...4	1...	....	..	U16 U17 U18 U21 U23 U24 U25 U28 U29
....	....	...4	....	....	1...	....	..	U14
....	....	....	....	....	1...	....	..	U14 U16 U17 U22 U26 U27
....	....	....	....	...4	....	....	..	U14 U17 U26
....	....	....	....	1...	....	....	..	U15
....	....	....	...4	....	....	....	..	U15 U19 U24 U25 U28 U29
....	....	....	..3.	....	....	....	..	U13
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18 U19 U23 U28 U29

PIASTRA-BOARD CAIN 28 0610004 B

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
			.3.				.2	U13
							.2	U20 V01
						.3.	..	V02
						2..	..	U30
			...4	...4	1...		..	U14 U15 U19 U30
			...4	...4	1...		..	U24 U25 U28 U29
				...4	1...		..	U15 U16 U17 U18
								U21 U23 U25 U26
								U28 U29
		...4			1...		..	U14
					1...		..	U14 U16 U17 U22
								U26 U27
				...4			..	U14 U17 U26
					1...		..	U15
...4			...4				..	U18 U19 U23 U24
								U25 U28 U29
		...4					..	U15 U18 U19 U25
								U28
		...4					..	U14 U30
...4							..	U18 U19 U23 U24
								U25 U28 U29

PIASTRA-BOARD CAIN 28 0610004 B

PROVA-TEST = 17

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	V01
....	....	....	.3..	....	....	..3.	..	U13
....	....	....	....	....	....	..3.	..	U13 U20 V02
....	....	....	....	....	....	2...	..	U30
....	....	....	...4	...4	1...	....	..	U14 U15 U19 U30
....	....	....	...4	...4	1...	....	..	U24 U25 U28 U29
....	....	....	....	...4	1...	....	..	U15 U16 U17 U18
								U21 U23 U25 U26
								U28 U29
....	....	...4	....	....	1...	....	..	U14
....	....	....	....	....	1...	....	..	U14 U16 U17 U22
								U26 U27
....	....	....	....	...4	....	....	..	U14 U17 U26
....	....	....	....	1...	....	....	..	U15
...4	....	....	...4	....	....	....	..	U18 U19 U23 U24
								U25 U28 U29
....	....	....	...4	....	....	....	..	U15 U18 U19 U25
								U28
....	....	....	.3..	....	....	....	..	U13
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18 U19 U23 U24
								U25 U28 U29

PIASTRA-BOARD CAIN 28 0610004 B

PROVA-TEST = 18

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...4	....	....	..34	1..4	1...	....	.2	U15
...4	....	....	..34	...4	1...	....	.2	U25 U29
...4	....	....	..3.	...4	1...	....	.2	U14 U15 U18 U19 U23 U24 U25 U28 U29 U30
...4	....	....	..34	....	....	....	.2	U28
....	....	....	..3.	....	....	....	.2	U13
....	....	....	....	....	....	....	.2	U13 U20 V01
....	....	....	....	....	....	..3.	..	V02
....	....	....	....	....	....	.2..	..	U30
...4	....	....	..3.	...4	1...	....	..	U29
....	....	....	....	...4	1...	....	..	U16 U17 U21 U26
....	....	...4	....	....	1...	....	..	U14
....	....	....	....	....	1...	....	..	U14 U16 U17 U22 U26 U27
....	....	....	....	...4	....	....	..	U14 U17 U26
....	....	....	....	1...	....	....	..	U15
...4	....	....	..34	....	....	....	..	U19 U24 U25 U29
....	....	....	...4	....	....	....	..	U15 U25
...4	....	....	..3.	....	....	....	..	U18 U19 U23 U24 U25 U28
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18

REVISION

PIASTRA-BOARD CAIN 2B 0610004 B

PROVA-TEST = 19

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...	...	...	...	...	...	...	.2	V01
...	...	...	...	..4	1..	..3	..	U16 U17 U21 U26
...	...	...	...	...	1..	..3	..	U16 U17 U22 U26
								U27
...	...	...	...	...	...	..3	..	U13 U16 U17 U20
								U22 V02
...	...	...	...	...	...	.2	..	U30
..4	...	...	.34	1..4	1..	...	..	U15
..4	...	...	.34	...4	1..	...	..	U25 U29
..4	...	...	.3.	...4	1..	...	..	U14 U15 U18 U19
								U23 U24 U25 U28
								U29 U30
...	...	...4	...	1...	1...	...	..	U14
...	...	...	...	...	1...	...	..	U14
...	...	...	...	...4	...	...	..	U14 U16 U17 U26
...	...	...	...	1...	...	...	..	U14 U15 U19
..4	...	...	.34	...	...	...	..	U19 U24 U25 U28
								U29
...	...	...	...4	...	...	...	..	U15
..4	...	...	.3.	...	...	...	..	U18 U19 U23 U24
								U25 U28
...	...	...	.3.	...	...	...	..	U13
...	...	...4	...	...	...	...	..	U14 U30
..4	...	...	...	...	...	...	..	U18

REVISION

PIASTRA-BOARD CAIN 2B 0610004 B

PROVA-TEST = 20

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...4	....	....	..34	1..4	1...	....	.2	U15
...4	....	....	..34	...4	1...	....	.2	U25 U29
...4	....	....	..3.	...4	1...	....	.2	U14 U15 U18 U19 U23 U24 U25 U28 U29 U30
...4	....	....	..34	....	....	....	.2	U19 U24 U25 U28 U29
...4	....	....	..3.	....	....	....	.2	U18 U19 U23 U24 U25 U28
....	....	....	..3.	....	....	....	.2	U13
....	....	....	....	....	....	....	.2	U20 V01
....	....	....	....	....	1...	..3.	..	U26
....	....	....	....	....	....	..3.	..	V02
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	...4	1...	....	..	U16 U17 U21 U26
....	....	...4	....	1...	1...	....	..	U14
....	....	....	....	....	1...	....	..	U14 U16 U17 U22 U26 U27
....	....	....	....	...4	....	....	..	U14 U16 U17 U26
....	....	....	....	1...	....	....	..	U14 U15 U19
....	....	....	...4	....	....	....	..	U15
...4	....	....	..3.	....	....	....	..	U25
....	....	...4	....	....	....	....	..	U14 U30
...4	....	....	....	....	....	....	..	U18

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.2..	.2..	....	....	....	....	....	12	U30
.2..	.2..	....	....	....	....	...4	.2	U17
....	.2..	....	....	....	....	...4	.2	U17
.2..	.2..	....	....	....	....	....	.2	U16 U18 U28 U30
....	....	....	....	....	....	....	.2	U18
....	....	....	....	....	....	...4	1.	U19
....	....	....	....	....	....	....	1.	U23 U30
....	....	....	....	....	....	...4	..	U18 U19
....	....	....	....	....	...4	....	..	V03
.2..	.2..	....	....	....	....	....	..	U26 U27
....	.2..	....	....	....	....	....	..	U26
12..	1...	....	....	....	....	....	..	U21
....	1...	....	....	....	....	....	..	U17 U21 U24
12..	....	....	....	....	....	....	..	U27
.2..	....	....	....	....	....	....	..	U21 U26 U27
1...	....	....	....	....	....	....	..	U19 U21 U27
XX..	XX..	....	....	....	...X	...X	XX	U17 U19 U27

COPIE AI TED. INV.

REVISION

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE

SEC.

LOC. PREGNANA (MI)

EMISS. AUG 1,1968

N° 400240000

CONT. SU FO. 52 FO. 51

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	....	....	12	U19
....	....	....	....	....	....	....	.2	U16 U18 U28
1...	....	....	....	....	....	....	1.	U23
....	....	....	....	....	....	....	1.	U30
....	1...	....	....	....	...4	...4	..	U17
....	1...	....	....	....	....	...4	..	U17
....	....	....	....	....	....	...4	..	U17 U18
....	12..	....	....	....	...4	....	..	U27
....	1...	....	....	....	...4	....	..	U24
....	....	....	....	....	...4	....	..	U22 U23 U24 V03
....	.2..	....	....	....	....	....	..	U26 U27
.2..	1...	....	....	....	....	....	..	U21
....	1...	....	....	....	....	....	..	U21
.2..	....	....	....	....	....	....	..	U21 U26 U27
1...	....	....	....	....	....	....	..	U19 U21 U27
XX..	XX..	....	....	....	...X	...X	XX	U17 U19 U27

REVISION

COPIE A:
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

EMISS. AUG 1,1968

N° 400240000

CONT. SU FO. 53 FO. 52

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	....	....	12	U19
....	....	....	....	....	...4	...4	.2	U17
....	....	....	....	....	....	...4	.2	U17
....	....	....	....	....	....	....	.2	U16 U18 U28
1...	....	....	....	....	...4	....	1.	U23
1...	....	....	....	....	....	....	1.	U23
....	....	....	....	....	....	....	1.	U29 U30
....	....	....	....	....	....	...4	..	U18
....	1...	....	....	....	...4	....	..	U24
....	....	....	....	....	...4	....	..	U22 U23 U24 V03
....	12..	....	....	....	....	....	..	U27
....	.2..	....	....	....	....	....	..	U26
1...	1...	....	....	....	....	....	..	U19
....	1...	....	....	....	....	....	..	U17 U19 U21 U22 U24
.2..	....	....	....	....	....	....	..	U21 U26 U27
1...	....	....	....	....	....	....	..	U19 U21 U27
XX..	XX..	....	....	....	...X	...X	XX	U17 U19 U27

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U16 U18 U28
....	....	....	....	....	....	....	1.	U23 U30
.2..	1...	....	....	....	....	...4	..	U19
....	1...	....	....	....	....	...4	..	U17 U18
.2..	....	....	....	....	....	...4	..	U17 U19
....	....	....	....	....	....	...4	..	U18
....	....	....	....	....	...4	....	..	V03
....	.2..	....	....	....	....	....	..	U26
12..	1...	....	....	....	....	....	..	U21
....	1...	....	....	....	....	....	..	U21 U22 U24
12..	....	....	....	....	....	....	..	U27
.2..	....	....	....	....	....	....	..	U21 U26 U27
1...	....	....	....	....	....	....	..	U19 U21 U27
XX..	XX..	....	....	....	...X	...X	XX	U17 U19

REVISION

COPIE A:
IND.
REV.

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U16 U18 U28
1...	....	....	....	....	...4	....	1.	U23
1...	....	....	....	....	....	....	1.	U23
....	....	....	....	....	....	....	1.	U30
1...	1...	....	....	....	....	...4	..	U19
....	1...	....	....	....	....	...4	..	U17 U18 U19
....	....	....	....	....	....	...4	..	U17 U18
....	1...	....	....	....	...4	....	..	U22 U24 U29
....	....	....	....	....	...4	....	..	U22 U23 U24 V03
....	.2..	....	....	....	....	....	..	U26
.2..	1...	....	....	....	....	....	..	U21
....	1...	....	....	....	....	....	..	U21 U24
.2..	....	....	....	....	....	....	..	U21 U26 U27
1...	....	....	....	....	....	....	..	U19 U21 U23
X...	XX..	....	....	....	...X	...X	XX	U19

REVISION

COPIE AI FO.

IND. REV.

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U16 U18 U28
....	....	....	....	....	....	....	1.	U23 U29 U30
....	....	....	....	....	....	...4	..	U17 U18
....	....	....	....	....	...4	....	..	V03
....	.2..	....	....	....	....	....	..	U26
12..	1...	....	....	....	....	....	..	U21
....	1...	....	....	....	....	....	..	U17 U21 U24
12..	....	....	....	....	....	....	..	U27
.2..	....	....	....	....	....	....	..	U21 U26 U27
1...	....	....	....	....	....	....	..	U19 U21 U27
X...	XX..	....	....	....	...X	...X	XX	U19

REVISION

COPIE AI NOI

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	1...	....	....	...	....	....	.2	U19
....	1...	....	....	...	....	....	.2	U19
....	....	....	....	...	....	....	.2	U16 U18 U28
....	....	....	....	...	....	....	1.	U23 U29 U30
....	....	....	....	...	....	...4	..	U17 U18
....	....	....	....	...	...4	....	..	V03
....	.2..	....	....	...	....	....	..	U26
....	1...	....	....	...	....	....	..	U17 U21 U22 U24
12..	....	....	....	...	....	....	..	U21 U27
.2..	....	....	....	...	....	....	..	U21 U26 U27
1...	....	....	....	...	....	....	..	U19 U21 U23 U27
X...	XX..	....	....	....	...X	...X	XX	U19 U24

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	1...	....	....	...•	....	....	.2	U19
....	1...	....	....	...•	....	....	.2	U19
....	....	....	....	...•	....	....	.2	U16 U18 U28
....	....	....	....	...•	....	....	1.	U23 U29 U30
....	....	....	....	....	....	...4	..	U17 U18
....	....	....	....	...•	...4	....	..	V03
....	.2..	....	....	....	....	....	..	U26
....	1...	....	....	....	....	....	..	U17 U21 U22 U24
12..	....	....	....	...•	....	....	..	U21 U27
.2..	....	....	....	...•	....	....	..	U21 U26 U27
1...	....	....	....	...•	....	....	..	U19 U21 U23 U27
X...	XX..	....	....	....	...X	...X	XX	U19 U24

REVISION

COPIE AT TOS.
IND. REV.

UNIT K270

COMPIL. GE

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

EMISS. AUG

N° 400240000

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	...4	.2	U17
....	....	....	....	....	...4	....	.2	U18
1...	1...	....	....	....	....	....	.2	U19
....	1...	....	....	....	....	....	.2	U19
....	....	....	....	....	....	....	.2	U16 U18 U28
1...	....	....	....	....	...4	....	1.	U23
1...	....	....	....	....	....	....	1.	U23
....	....	....	....	....	....	....	1.	U30
....	....	....	....	....	....	...4	..	U18
....	1...	....	....	....	...4	....	..	U22 U24
....	....	....	....	....	...4	....	..	U22 U23 V03
....	.2..	....	....	....	....	....	..	U26
....	1...	....	....	....	....	....	..	U17 U21 U22 U24
.2..	....	....	....	....	....	....	..	U21 U26 U27
1...	....	....	....	....	....	....	..	U19 U21 U23
XX..	XX..	....	....	....	...X	...X	XX	U17 U19 U24

REVISION

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	1...	....	....	....	....	....	.2	U17
1...	....	....	....	....	....	....	.2	U19
....	....	....	....	....	....	....	.2	U16 U17 U18 U19 U28 U30
1...	....	....	....	....	....	....	1.	U23
....	....	....	....	....	....	....	1.	U29 U30
....	....	....	....	....	....	...4	..	U17 U18
....	....	....	....	....	...4	....	..	V03
....	.2..	....	....	....	....	....	..	U26
.2..	1...	....	....	....	....	....	..	U21
....	1...	....	....	....	....	....	..	U21 U24
.2..	....	....	....	....	....	....	..	U21 U26 U27
1...	....	....	....	....	....	....	..	U19 U21 U23 U27
XX..	XX..	....	....	....	...X	...X	XX	U17 U19 U24

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	.2..	....	....	....	....	....	12	U19
....	.2..	....	....	....	....	....	12	U19
.2..	12..	....	....	....	....	....	.2	U17
....	.2..	....	....	....	....	....	.2	U16 U17 U18 U19 U28
....	....	....	....	....	....	....	.2	U18
....	....	....	....	....	....	....	1.	U23 U29 U30
.2..	....	....	....	....	....	...4	..	U17
....	....	....	....	....	....	...4	..	U17 U18
....	....	....	....	....	...4	....	..	V03
.2..	.2..	....	....	....	....	....	..	U26
....	.2..	....	....	....	....	....	..	U26 U27
....	1...	....	....	....	....	....	..	U21 U24
.2..	....	....	....	....	....	....	..	U21 U26 U27
1...	....	....	....	....	....	....	..	U19 U21 U23 U27
XX..	XX..	....	....	....	...X	...X	XX	U17 U19 U24

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	12..	....	....	....	....	...4	.2	U17 U18
....	.2..	....	....	....	....	....	.2	U16 U28 U30
....	....	....	....	....	....	....	.2	U18
1...	1...	....	....	....	....	....	1.	U19
....	1...	....	....	....	....	....	1.	U19
....	....	....	....	....	....	....	1.	U23 U29 U30
....	1...	....	....	....	....	...4	..	U17
....	....	....	....	....	....	...4	..	U18
....	....	....	....	....	...4	....	..	V03
.2..	12..	....	....	....	....	....	..	U27
1...	.2..	....	....	....	....	....	..	U19 U23 U27
....	.2..	....	....	....	....	....	..	U26 U27
.2..	1...	....	....	....	....	....	..	U26 U27
....	1...	....	....	....	....	....	..	U17 U21 U24 U29
.2..	....	....	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U21
XX..	XX..	....	....	....	...X	...X	XX	U17 U19

REVISIONI

COPIE A: IND. RIV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE

LOC. PREGNANA (MI)

Nº 4100240000

EMISS. AUG 1,1968

CONT. SU FO. 62 FO. 61

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	1...	....	....	....	....	...4	.2	U17 U18
....	....	....	....	....	....	....	.2	U16 U18 U28 U30
1...	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	....	1.	U19 U23 U29 U30
....	1...	....	....	....	....	...4	..	U17
....	....	....	....	....	....	...4	..	U17 U18
....	....	....	....	....	...4	....	..	V03
....	2...	....	....	....	....	....	..	U26 U27
2...	1...	....	....	....	....	....	..	U26 U27
....	1...	....	....	....	....	....	..	U21 U24 U29
2...	....	....	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U19 U21 U23 U27
XX..	XX..	....	....	....	...X	...X	XX	U17 U19

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	1...	....	....	....	...4	...4	.2	U18
....	1...	....	....	....	....	...4	.2	U18
....	....	....	....	....	....	....	.2	U18 U28
1...	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	....	1.	U19 U23 U29 U30
....	1...	....	....	....	...4	...4	..	U17 U18
....	1...	....	....	....	....	...4	..	U17 U18
....	....	....	....	....	....	...4	..	U18
....	....	....	....	....	...4	....	..	U22 U23 V03
....	.2..	....	....	....	....	....	..	U26 U27
.2..	1...	....	....	....	....	....	..	U17 U26 U27
....	1...	....	....	....	....	....	..	U21 U22 U24 U29
.2..	....	....	....	....	....	....	..	U21 U26
1...	....	....	....	....	....	....	..	U19 U21 U23 U27
XX..	XX..	....	....	....	...X	...X	XX	U17 U19

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	1...	....	....	....	....	...4	.2	U18
....	....	....	....	....	....	....	.2	U18 U28
1...	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	....	1.	U19 U23 U29 U30
....	1...	....	....	....	....	...4	..	U17 U18
....	....	....	....	....	....	...4	..	U18
....	....	....	....	....	...4	....	..	V03
....	2...	....	....	....	....	....	..	U26 U27
.2..	1...	....	....	....	....	....	..	U26 U27
....	1...	....	....	....	....	....	..	U21 U24 U29
.2..	....	....	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U19 U21 U23 U27
X...	XX..	....	....	....	...X	...X	XX	U19

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	1...	....	....	....	...4	....	.2	U18
....	....	....	....	....	....	....	.2	U18 U28
1...	1...	....	....	....	...4	....	1.	U19
....	1...	....	....	....	....	....	1.	U19
....	....	....	....	....	...4	....	1.	U19 U23 U29 U30
....	....	....	....	....	...4	...4	..	U17
....	....	....	....	....	....	...4	..	U18
.2..	1...	....	....	....	...4	....	..	U26 U27
....	1...	....	....	....	...4	....	..	U17 U18 U22 U24 U29
1...	....	....	....	....	...4	....	..	U23
....	....	....	....	....	...4	....	..	U18 U22 U23 U03
....	.2..	....	....	....	....	....	..	U26 U27
....	1...	....	....	....	....	....	..	U17 U21 U22 U24
.2..	....	....	....	....	....	....	..	U21
1...	....	....	....	....	....	....	..	U19 U21 U23 U27
X...	XX..	....	....	....	...X	...X	XX	U19

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	.2..	....	....	....	....	....	.2	U28
....	....	....	....	....	....	....	.2	U18
1...	.2..	....	....	....	....	....	1.	U23
....	....	....	....	....	....	....	1.	U30
....	1...	....	....	....	....	...4	..	U17
....	....	....	....	....	....	...4	..	U17 U18
....	....	....	....	....	...4	....	..	V03
.2..	.2..	....	....	....	....	....	..	U27
1...	.2..	....	....	....	....	....	..	U19
....	.2..	....	....	....	....	....	..	U26 U27
.2..	1...	....	....	....	....	....	..	U21
....	1...	....	....	....	....	....	..	U17 U19 U21 U24
.2..	....	....	....	....	....	....	..	U21 U26 U27
1...	....	....	....	....	....	....	..	U19 U21
XX..	XX..	....	....	....	...X	...X	XX	U17

REVISION

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 17

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	.2	U18
.2..	.2..	....	....	....	....	....	.2	U28
....	....	....	....	....	....	....	.2	U18
12..	.2..	....	....	....	....	....	1.	U23
....	....	....	....	....	....	....	1.	U29 U30
.2..	1...	....	....	....	....	...4	..	U17
....	....	....	....	....	....	...4	..	U17 U18
.2..	....	....	....	....	...4	....	..	U17
....	....	....	....	....	...4	....	..	V03
12..	.2..	....	....	....	....	....	..	U19 U27
.2..	.2..	....	....	....	....	....	..	U26 U27
....	.2..	....	....	....	....	....	..	U27
.2..	1...	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U21 U24
.2..	....	....	....	....	....	....	..	U21 U26 U27
1...	....	....	....	....	....	....	..	U19 U21
XX..	XX..	....	....	....	...X	...X	XX	U17 U19 U23

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 18

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	1...	....	....	....	....	...4	.2	U18
.2..	....	....	....	....	....	....	.2	U28
....	....	....	....	....	....	....	.2	U18
....	12..	....	....	....	....	....	1.	U23
....	....	....	....	....	....	....	1.	U29 U30
....	1...	....	....	....	....	...4	..	U17 U18
....	....	....	....	....	....	...4	..	U18
.2..	1...	....	....	....	...4	....	..	U17
....	....	....	....	....	...4	....	..	V03
1...	12..	....	....	....	....	....	..	U19 U27
....	12..	....	....	....	....	....	..	U19 U27
.2..	.2..	....	....	....	....	....	..	U26
....	.2..	....	....	....	....	....	..	U26
....	1...	....	....	....	....	....	..	U17 U21 U22 U24
.2..	....	....	....	....	....	....	..	U17 U19 U21 U23 U26 U27
1...	....	....	....	....	....	....	..	U21 U27
X...	XX..	....	....	....	...X	...X	XX	U19 U23

REVISION

COPIE A:
TOT.
REV.
INV.

PIASTRA-BOARD CANA 2A U610005 F

PROVA-TEST = 19

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	1...	....	....	....	....	...4	.2	U18
.2..	....	....	....	....	....	....	.2	U28
....	....	....	....	....	....	....	.2	U18 U28
1...	12..	....	....	....	....	....	1.	U23
....	....	....	....	....	....	....	1.	U29 U30
....	1...	....	....	....	....	...4	..	U17 U18
....	....	....	....	....	....	...4	..	U18
.2..	1...	....	....	....	...4	....	..	U17
....	....	....	....	....	...4	....	..	V03
1...	12..	....	....	....	....	....	..	U19 U27
....	12..	....	....	....	....	....	..	U19 U27
.2..	.2..	....	....	....	....	....	..	U26
1...	.2..	....	....	....	....	....	..	U19
....	.2..	....	....	....	....	....	..	U26
....	1...	....	....	....	....	....	..	U17 U21 U22 U24
.2..	....	....	....	....	....	....	..	U17 U19 U21 U23
								U26 U27
1...	....	....	....	....	....	....	..	U21 U27
X...	XX..	....	....	....	...X	...X	XX	U19 U23

COPIE AT. TOL.

REV. REV.

REVISION

PIASTRA-BOARD CANA 2A 0610005 F

PROVA-TEST = 20

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	.2	U18
....	....	....	....	....	....	....	.2	U16 U18 U28 U30
1...	....	....	....	....	....	....	1.	U23
....	....	....	....	....	....	....	1.	U30
.2..	1...	....	....	....	....	...4	..	U17
.2..	....	....	....	....	....	...4	..	U17
....	....	....	....	....	....	...4	..	U17 U18
....	....	....	....	....	...4	....	..	U22 U23 V03
.2..	.2..	....	....	....	....	....	..	U26
....	.2..	....	....	....	....	....	..	U26 U27
.2..	1...	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U21 U24
.2..	....	....	....	....	....	....	..	U21 U26 U27
1...	....	....	....	....	....	....	..	U19 U21 U27
X...	XX...	....	....	....	...X	...X	XX	U19 U23

REVISION

COPIE AI SOCI

IND. REV.

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD CANA 2B 8610006 K

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U02 U06 V01
....	....	....	....	....	....	....	1.	U06
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	1...	..	U08
12..	....	....	....	....	....	....	..	U05
.2..	....	....	....	....	....	....	..	U02 U03 U05 U07
1...	....	....	....	....	....	....	..	U02 U03 U05 U07

PIASTRA-BOARD CANA 2B 0610006 K

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.2..	....	....	....	....	....	....	.2	U02 U04
....	....	....	....	....	....	....	.2	U02 U04 U06 U01
....	....	....	....	....	....	....	1.	U06
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	1...	..	U08
.2..	....	....	....	....	....	....	..	U02 U03 U04 U05 U07
1...	....	....	....	....	....	....	..	U02 U03 U05 U07
XX..	....	....	....	....	....	....	..	U07

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

PIASTRA-BOARD CANA 28 0610006 K

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U02 U06 V01
....	....	....	....	....	....	....	1.	U06
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	1...	..	U08
.2..	....	....	....	....	....	....	..	U02 U03 U04 U05 U07
1...	....	....	....	....	....	....	..	U02 U03 U05 U07
XX..	....	....	....	....	....	....	..	U07

COPIE A:
IND. REV.

REVISION

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1 1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

PIASTRA-BOARD CANA 2B 0610006 K

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	12	U06
....	....	....	....	....	....	....	.2	U02 U06 V01
....	....	....	....	....	....	....	1.	U06
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	1...	..	U08
12..	....	....	....	....	....	....	..	U02 U07
.2..	....	....	....	....	....	....	..	U02 U03 U04 U05 U07
1...	....	....	....	....	....	....	..	U02 U05 U07

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

CONT. SU FO. 81 FO. 80

PIASTRA-BOARD CANA 28 0610006 K

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	....	....	.2	U02
....	....	....	....	....	....	....	.2	U02 U04 U06 V01
....	....	....	....	....	....	1..4	..	U08
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	1...	..	U08
.2..	....	....	....	....	....	....	..	U02 U03 U05 U07
1...	....	....	....	....	....	....	..	U02 U03 U05 U07
XX..	....	....	....	....	....	....	..	U07

COPIE A TO

IND. REV.

REVISION

UNIT K27P

COMPIL. I.P. 425

APPR. pl

SIED. SPS - OGE

LOC. PREGNANA (MI)

Nº 4002400000

EMISS. AUG 1 1968

CONT. SU FO. 81 FO. 80

PIASTRA-BOARD CANA 28 0610006 K

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	....	....	.2	U02
....	....	....	....	....	....	....	.2	U02 U06 V01
.2..	....	....	....	....	....	....	..	U02 U03 U04 U05 U07
1...	....	....	....	....	....	....	..	U02 U03 U05 U07
XX..	....	....	....	....	....	....	..	U07

PIASTRA-BOARD CANA 2B 0610006 K

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	....	....	.2	U02
....	....	....	....	....	....	....	.2	U02 U06 V01
.2..	....	....	....	....	....	....	..	U02 U03 U04 U05 U07
1...	....	....	....	....	....	....	..	U02 U03 U05 U07
XX..	....	....	....	....	....	....	..	U07

REVISION

PIASTRA-BOARD CANA 2B 0610006 K

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	....	....	.2	U02
....	....	....	....	....	....	....	.2	U02 U06 V01
.2..	....	....	....	....	....	....	..	U02 U03 U04 U05 U07
1...	....	....	....	....	....	....	..	U02 U03 U05 U07
XX..	....	....	....	....	....	....	..	U07

REVISION

COPIE A:
LOC.
IND.
REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

EMISS. AUG 1 1968

Nº 4011240000

CONT. SU FO. 84 FO. 83

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

I^a APPLIC. GE 130

PIASTRA-BOARD CANA 2B 0610006 K

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U02 U06 V01
.2..	....	....	....	....	....	....	..	U02 U05 U07
1...	....	....	....	....	....	....	..	U02 U03 U05 U07
XX..	....	....	....	....	....	....	..	U07

REVISION

COPIE A:
IND.
REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
LOC. PREGNANA (MI)

N° 400240000

EMISS. AUG 1-1968

PIASTRA-BOARD CANA 2C 0610007 P

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	1...	1...	....	..	U04
....	....	....	....	....	1...	....	..	U04
....	....	....	....	1...	....	....	..	U02
....	....	....	...4	....	....	....	..	V01
....	....	....	..3.	....	....	....	..	V02
1...	.2..	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
..3.	....	....	....	....	....	....	..	U05 U07
.2..	....	....	....	....	....	....	..	U05 U07
1...	....	....	....	....	....	....	..	U05

PIASTRA-BUARD CANA 2C J610007 P

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	..	U08
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	1...	1...	....	..	U04
....	....	....	....	....	1...	....	..	U04
....	....	....	....	1...	....	....	..	U02
....	....	....	...4	....	....	....	..	U06 V01
....	....	....	..3.	....	....	....	..	U06 V02
....	.2..	....	....	....	....	....	..	U05
..3.	....	....	....	....	....	....	..	U05 U07
.2..	....	....	....	....	....	....	..	U05 U07
1...	....	....	....	....	....	....	..	U05

REVISION

COPIE A:
TO:
IND. REV.

PIASTRA-BOARD CANA 2C 0610007 P

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	..	U08
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	1...	1...	....	..	U04
....	....	....	....	....	1...	....	..	U04
....	....	....	....	1...	....	....	..	U02
....	....	....	...4	....	....	....	..	V01
....	....	....	..3.	....	....	....	..	V02
....	.2..	....	....	....	....	....	..	U05
.23.	....	....	....	....	....	....	..	U05 U07
..3.	....	....	....	....	....	....	..	U05 U07
1...	....	....	....	....	....	....	..	U05

REVISIONI

DOPPIA TOLL. REV.

PIASTRA-BOARD CANA 20 0610007 P

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	..	U08
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	1...	....	..	U04
....	....	....	....	1...	....	....	..	U02
....	....	....	...4	....	....	....	..	U06 V01
....	....	....	..3.	....	....	....	..	U06 V02
.23.	....	....	....	....	....	....	..	U05 U07
..3.	....	....	....	....	....	....	..	U05 U07

PIASTRA-BOARD CANA 2C 0610007 P

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	..	U08
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	1...	....	..	U04
....	....	....	....	1...	....	....	..	U02
....	....	....	..34	....	....	....	..	U06
....	....	....	...4	....	....	....	..	U06 V01
....	....	....	..3.	....	....	....	..	U06 V02
.23.	....	....	....	....	....	....	..	U05 U07
..3.	....	....	....	....	....	....	..	U05
.2..	....	....	....	....	....	....	..	U05

REVISION

PIASTRA-BOARD CANA 2C 0610007 P

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	..	U08
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	1...	....	..	U04
....	....	....	....	1...	....	....	..	U02
....	....	....	...4	....	....	....	..	V01
....	....	....	..3.	....	....	....	..	V02
.23.	....	....	....	....	....	....	..	U05 U07
..3.	....	....	....	....	....	....	..	U05

REVISION

COPIE A:
IND.
REV.

PIASTRA-BOARD CANA 2C 0610007 P

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	..	U08
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	1...	....	..	U04
....	....	....	....	1...	....	....	..	U02
....	....	....	...4	....	....	....	..	V01
....	....	....	..3.	....	....	....	..	V02
.23.	....	....	....	....	....	....	..	U05 U07
..3.	....	....	....	....	....	....	..	U05

PIASTRA-BOARD CISP 2A 0610008 C

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	..3.	.234	....	..3.	...4	12	U26
....	....	....	....	....	..3.	...4	12	U26
....	....	....	....	....	....	....	.2	U28
....	....	....	....	....	....	....	1.	U27
....	....	....	....	....	....	...4	..	U27
....	....	....	....	....	..3.	....	..	U28
..3.	...4	1..4	....	1.34	.2..	....	..	U30
....	....	....	....	1.34	.2..	....	..	U30
....	....	....	....	....	.2..	....	..	U24
....	....	....	....	...4	....	....	..	U24
....	....	....	....	..3.	....	....	..	U25
....	....	....	....	1...	....	....	..	U25
....	....	..3.	.234	....	....	....	..	U26
....	....	....	...4	....	....	....	..	U22
....	....	....	..3.	....	....	....	..	U22
....	....	....	.2..	....	....	....	..	U21
..3.	...4	1..4	....	....	....	....	..	U30
....	....	...4	....	....	....	....	..	U23
....	....	..3.	....	....	....	....	..	U21
....	....	1...	....	....	....	....	..	U29
....	...4	....	....	....	....	....	..	U29
..3.	....	....	....	....	....	....	..	U23

PIASTRA-BOARD CISP 2A 0610008 C

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	...4	12	U26
....	....	....	....	....	..3.	....	.2	U28
....	....	....	....	....	....	....	.2	U28
....	....	....	....	....	....	...4	1.	U27
....	....	....	....	....	....	....	1.	U27
....	....	....	....	....	....	...4	..	U27
....	....	....	....	....	..3.	....	..	U28
....	....	....	....	1.34	.2..	....	..	U30
....	....	....	....	...4	.2..	....	..	U24
....	....	....	....	....	.2..	....	..	U24
....	....	....	....	...4	....	....	..	U24
....	....	....	....	1.3.	....	....	..	U25
....	....	....	....	..3.	....	....	..	U25
....	....	....	....	1...	....	....	..	U25
....	....	..3.	.234	....	....	....	..	U26
....	....	....	..34	....	....	....	..	U22
....	....	....	...4	....	....	....	..	U22
....	....	....	..3.	....	....	....	..	U22
....	....	..3.	.2..	....	....	....	..	U21
....	....	....	.2..	....	....	....	..	U21
..3.	...4	1..4	....	....	....	....	..	U30
..3.	....	...4	....	....	....	....	..	U23
....	....	...4	....	....	....	....	..	U23
....	....	..3.	....	....	....	....	..	U21
....	...4	1...	....	....	....	....	..	U29
....	....	1...	....	....	....	....	..	U29
....	...4	....	....	....	....	....	..	U29
..3.	....	....	....	....	....	....	..	U23

REVISION

PIASTRA-BOARD CISP 2A 0610008 C

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	...4	12	U26
....	....	....	....	....	..3.	....	.2	U28
....	....	....	....	....	....	....	.2	U28
....	....	....	....	....	....	...4	1.	U27
....	....	....	....	....	....	....	1.	U27
....	....	....	....	....	....	...4	..	U27
....	....	....	....	....	.3..	....	..	U28
....	....	....	....	1.34	.2..	....	..	U30
....	....	....	....	...4	.2..	....	..	U24
....	....	....	....	....	.2..	....	..	U24
....	....	....	....	...4	....	....	..	U24
....	....	....	....	1.3.	....	....	..	U25
....	....	....	....	.3.	....	....	..	U25
....	....	....	....	1...	....	....	..	U25
....	....	..3.	.234	....	....	....	..	U26
....	....	....	..34	....	....	....	..	U22
....	....	....	...4	....	....	....	..	U22
....	....	....	..3.	....	....	....	..	U22
....	....	..3.	.2..	....	....	....	..	U21
....	....	....	.2..	....	....	....	..	U21
..3.	...4	1..4	....	....	....	....	..	U30
..3.	....	...4	....	....	....	....	..	U23
....	....	...4	....	....	....	....	..	U23
....	....	..3.	....	....	....	....	..	U21
....	...4	1...	....	....	....	....	..	U29
....	....	1...	....	....	....	....	..	U29
....	...4	....	....	....	....	....	..	U29
..3.	....	....	....	....	....	....	..	U23

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD COFA 2A 0610009 G

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	12	U20
....	....	....	....	....	12..	....	.2	U13
....	....	....	....	....	....	....	.2	U18 U20 U28
....	....	....	....	....	....	..34	1.	U22
....	....	....	....	....	....	....	1.	U18 U20 U28
....	....	....	....	....	....	..34	..	U18 U19 U21
....	....	....	....	....	....	...4	..	U19
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	....	12..	..	U24
....	....	....	....	....	....	.2..	..	U21 U24
....	....	....	....	....	....	1...	..	U23 U24
....	....	....	....	....	1..4	....	..	U17
....	....	....	....	....	...4	....	..	U17 U23
....	....	....	....	....	.23.	....	..	U25
....	....	....	....	....	..3.	....	..	U17 U25
....	....	....	....	....	.2..	....	..	U19 U25
....	....	....	....	....	1...	....	..	U17 U18

PIASTRA-BOARD CoFA 2A 0610009 G

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	••••	••••	12	U28
••••	••••	••••	••••	••••	12.4	••••	.2	U13
••••	••••	••••	••••	••••	••••	••••	.2	U20 U28
••••	••••	••••	••••	••••	••3•	1234	1•	U22
••••	••••	••••	••••	••••	••••	••••	1•	U20 U28
••••	••••	••••	••••	••••	••••	.234	••	U21
••••	••••	••••	••••	••••	••••	••34	••	U19 U21
••••	••••	••••	••••	••••	••••	••3•	••	U19
••••	••••	••••	••••	••••	••••	.2••	••	U21 U24
••••	••••	••••	••••	••••	•••4	1•••	••	U23
••••	••••	••••	••••	••••	••••	1•••	••	U23 U24
••••	••••	••••	••••	••••	••••4	••••	••	U17 U23
••••	••••	••••	••••	••••	1.3•	••••	••	U17
••••	••••	••••	••••	••••	••3•	••••	••	U17 U25
••••	••••	••••	••••	••••	12••	••••	••	U13
••••	••••	••••	••••	••••	•2••	••••	••	U19 U25
••••	••••	••••	••••	••••	1•••	••••	••	U17 U18

REVISION

COPIE A:
TO:
IND. REV.

UNIT K270

COMPIL. GE 425

APPR. Al

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1.1968

PIASTRA-BOARD COFA 2A 0610009 G

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	····	····	·2	U13 U18 U20
····	····	····	····	····	··3·	1234	1·	U22
····	····	····	····	····	····	····	1·	U18 U20 U28
····	····	····	····	····	····	··34	··	U18 U19 U21
····	····	····	····	····	····	···4	··	U19
····	····	····	····	····	····	··3·	··	U19
····	····	····	····	····	····	12··	··	U24
····	····	····	····	····	····	·2··	··	U21 U24
····	····	····	····	····	····	1···	··	U23 U24
····	····	····	····	····	1··4	····	··	U17
····	····	····	····	····	···4	····	··	U17
····	····	····	····	····	·23·	····	··	U25
····	····	····	····	····	··3·	····	··	U17 U25
····	····	····	····	····	·2··	····	··	U19 U25
····	····	····	····	····	1···	····	··	U17 U18

PIASTRA-BOARD COFA 2A 0610009 G

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	12.4	....	.2	U13
....	....	....	....	....	...4	....	.2	U13
....	....	....	....	....	....	....	.2	U_{18} U_{20} U_{28}
....	....	....	....	....	....	.234	1.	U22
....	....	....	....	....	1...	..34	1.	U18
....	....	....	....	....	....	....	1.	U18 U20
....	....	....	....	....	....	..34	..	U18 U19
....	....	....	....	....	.2..	..3.	..	U19
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	....	12..	..	U24
....	....	....	....	....	....	.2..	..	U21 U22 U24
....	....	....	....	....	....	1...	..	U24
....	....	....	....	....	...4	....	..	U17 U23
....	....	....	....	....	..3.	....	..	U25
....	....	....	....	....	.2..	....	..	U19 U25
....	....	....	....	....	1...	....	..	U17 U18

REVISIONI

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	..3.	1.	U19
....	....	....	....	....	....	....	1.	U14 U19
....	....	....	....	....	....	1..4	..	U20
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	...4	12..	..	U21 U23 U25
....	....	....	....	....	....	.2..	..	U13 U21
....	....	....	....	....	...4	1...	..	U21
....	....	....	....	....	....	1...	..	U11 U20
....	....	....	....	....	...4	....	..	U09 U12 U15
....	....	....	....	....	..3.	....	..	U15

REVISION

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	..34	..	U18 U22 U23
....	....	....	....	....	....	...4	..	U08 U20
....	....	....	....	....	....	..3.	..	U12 U19 U22 U23
....	....	....	....	....	....	.2..	..	U13
....	....	....	....	....	....	1...	..	U14 U20
....	....	....	....	....	...4	....	..	U12 U15 U16
....	....	....	....	....	..3.	....	..	U09 U11 U15 U17

REVISION

COPIE A:
TO:
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 4002A000

EMISS. AUG 1,1968

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	12	U23
....	....	....	....	....	.2..	....	.2	U24
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	..34	1.	U22
....	....	....	....	....	....	..3.	1.	U19
....	....	....	....	....	....	....	1.	U14 U19
....	....	....	....	....	....	..34	..	U18
....	....	....	....	....	....	...4	..	U08 U20
....	....	....	....	....	....	..3.	..	U12 U14 U19 U22
....	....	....	....	....	....	.2..	..	U08 U13
....	....	....	....	....	..3.	1...	..	U23
....	....	....	....	....	....	1...	..	U11 U14 U18 U20
....	....	....	....	....	...4	....	..	U09 U15
....	....	....	....	....	..3.	....	..	U09 U11 U15 U17
....	....	....	....	....	.2..	....	..	U07 U24

COPIE A: TO:
IND. REV.

REVISION

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	1..4	..	U20
....	....	....	....	....	....	...4	..	U08 U18 U20 U22 U23
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	.2.4	.2..	..	U21 U23
....	....	....	....	....	....	.2..	..	U13 U21
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	.2.4	....	..	U21
....	....	....	....	....	...4	....	..	U12 U15
....	....	....	....	....	..3.	....	..	U15
....	....	....	....	....	.2..	....	..	U07

REVISION

COPIE A:
IND.
REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE

EMISS. AUG 1,1968

LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 120 FO. 119

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	..3.	1.	U19
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	..34	12..	..	U21 U23 U25
....	....	....	....	....	....	12..	..	U23
....	....	....	....	....	....	.2..	..	U08 U13 U21
....	....	....	....	....	..34	1...	..	U21
....	....	....	....	....	....	1...	..	U11 U14 U20
....	....	....	....	....	...4	....	..	U09 U12 U15
....	....	....	....	....	..3.	....	..	U11 U15

REVISION

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	····	····	·2	U24
····	····	····	····	····	····	··3·	1·	U19
····	····	····	····	····	····	····	1·	U14 U19 U22 U23
····	····	····	····	····	····	···4	··	U20
····	····	····	····	····	····	··3·	··	U19
····	····	····	····	····	····	·2··	··	U08 U13 U21 U23 U25
····	····	····	····	····	····	1···	··	U20
····	····	····	····	····	··34	····	··	U15
····	····	····	····	····	···4	····	··	U15
····	····	····	····	····	··3·	····	··	U15

PIASTRA-BOARD CONT 2A I U610010 S

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	····	····	·2	U24
····	····	····	····	····	····	··3·	1·	U19
····	····	····	····	····	····	····	1·	U14 U19
····	····	····	····	····	····	·2·4	··	U08
····	····	····	····	····	····	···4	··	U08 U18 U20
····	····	····	····	····	····	··3·	··	U19
····	····	····	····	····	····	·2··	··	U08 U13 U21 U23 U25
····	····	····	····	····	····	1···	··	U14 U20
····	····	····	····	····	··34	····	··	U09
····	····	····	····	····	···4	····	··	U09 U15
····	····	····	····	····	··3·	····	··	U09 U15

REVISION

COPIE N.
IND. REV.

PIASTRA-BOARD CONT 2A 1 U610010 S

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	....	1.	U14 U19
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U14 U19
....	....	....	....	....	....	.2..	..	U08 U13 U21 U23 U25
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	..34	....	..	U15
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	..3.	....	..	U15

CONFIG. AT TOP
IND. INT.
REVISION

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U14 U19
....	....	....	....	....	.23.	12..	..	U13 U21 U23
....	....	....	....	....	....	.2..	..	U13 U21
....	....	....	....	....	..3.	1...	..	U11
....	....	....	....	....	.2..	1...	..	U23
....	....	....	....	....	....	1...	..	U11 U18 U20
....	....	....	....	....	...4	....	..	U09 U15
....	....	....	....	....	.23.	....	..	U09 U17
....	....	....	....	....	..3.	....	..	U11 U15
....	....	....	....	....	.2..	....	..	U07 U23 U24

REVISION

COPIE A: NO. RIF.

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	12	U23
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	..3.	1.	U19
....	....	....	....	....	....	....	1.	U14 U19 U22
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U14 U19
....	....	....	....	....	....	.2..	..	U13 U21 U23 U25
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	..34	....	..	U15
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	..3.	....	..	U15

PIASTRA-BOARD CONT 2A I V610V10 S

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U23 U24
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	....	.2..	..	U13 U21 U23 U25
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	..3.	....	..	U15

REVISION

COPIE A:
IND.
RIV.

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS							GUASTI - FAULTS
A	B	C	D	E	F	G H	
....	....	....	....	....	....	...4 12	U23
....	....	....	....	....	....	2	U24
....	....	....	....	....	....	...4 1.	U22
....	....	....	....	....	....	..3. 1.	U19
....	....	....	....	....	....	.... 1.	U14 U19
....	....	....	....	....	....	1..4 ..	U20
....	....	....	....	....	....	...4 ..	U08 U18 U20
....	....	....	....	....	....	..3. ..	U14 U19
....	....	....	....	....	....	12.. ..	U13 U21 U25
....	....	....	....	....	....	.2.. ..	U08 U13 U21
....	....	....	....	....	....	1... ..	U11 U14 U18 U20
....	....	....	....	....	...4	.... ..	U15
....	....	....	....	....	..3.	.... ..	U15

REVISION

COPIE A:
INV.
ING.

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...•	•2	U24
....	....	....	....	....	....	....	1•	U19
....	....	....	....	....	....	1..4	••	U20
....	....	....	....	....	....	...4	••	U08 U18 U20 U22 U23
....	....	....	....	....	....	..3.	••	U12 U19 U22
....	....	....	....	....	....	.2..	••	U13
....	....	....	....	....	....	1...	••	U11 U14 U18 U20 U21 U23
....	....	....	....	....	..34	....	••	U15
....	....	....	....	....	...4	....	••	U15
....	....	....	....	....	..3.	....	••	U09 U11 U15

REVISION

COPIE A:
TO:
INV.
REV.

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U23 U24
....	....	....	....	....	....	..3.	1.	U19
....	....	....	....	....	....	....	1.	U14 U19 U22 U23
....	....	....	....	....	....	1..4	..	U20
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	....	.2..	..	U13
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	.23.	....	..	U21 U23 U25
....	....	....	....	....	..3.	....	..	U09 U11 U15
....	....	....	....	....	.2..	....	..	U07

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••••	•••••	•••••	•••••	•••••	•2•••	•••••	•2	U24
•••••	•••••	•••••	•••••	•••••	•••••	•••••	•2	U23 U24
•••••	•••••	•••••	•••••	•••••	•••••	••3••	1•	U19
•••••	•••••	•••••	•••••	•••••	•••••	•••••	1•	U14 U19 U22
•••••	•••••	•••••	•••••	•••••	•••••	1••4•	••	U20
•••••	•••••	•••••	•••••	•••••	•••••	••••4	••	U20
•••••	•••••	•••••	•••••	•••••	•••••	••3••	••	U19
•••••	•••••	•••••	•••••	•••••	•••••	•2•••	••	U08 U13
•••••	•••••	•••••	•••••	•••••	•••••	1•••••	••	U20
•••••	•••••	•••••	•••••	•••••	••34•	•••••	••	U15
•••••	•••••	•••••	•••••	•••••	•••4•	•••••	••	U09 U15
•••••	•••••	•••••	•••••	•••••	••3••	•••••	••	U09 U11 U13 U15 U17 U21 U23 U25
•••••	•••••	•••••	•••••	•••••	•2•••	•••••	••	U07 U24

REVISION •

COPIE A:
IND.
REV.

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U23 U24
....	....	....	....	....	....	..3.	1.	U19
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	1..4	..	U20
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	....	.2..	..	U08 U13
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	..34	....	..	U15
....	....	....	....	....	...4	....	..	U09 U15
....	....	....	....	....	.23.	....	..	U09 U17 U23
....	....	....	....	....	..3.	....	..	U09 U11 U15
....	....	....	....	....	.2..	....	..	U07 U23 U24

COPIE AL TD
IND. REV.

REVISION

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 17

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U23 U24
....	....	....	....	....	....	..3.	1.	U19
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	1..4	..	U20
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	..3.	.2..	..	U13
....	....	....	....	....	....	.2..	..	U13
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	..3.	....	..	U09 U11 U13 U15 U23

REVISION

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 18

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	..3.	1.	U19
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	1..4	..	U20
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	..3.	.2..	..	U13
....	....	....	....	....	....	.2..	..	U13
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	..3.	....	..	U09 U11 U13 U15 U23

COPIE A/C
NO. REV.

REVISION

UNIT K270

COMPIL. GE 425
EMISS. AUG 1,1968

APPR.

SEZ. SEC. SPS - OGE
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 134 FO. 133

PIASTRA-BOARD CONT 2A I 0610010 S

PROVA-TEST = 19

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	...4	1.	U23
....	....	....	....	....	....	....	1.	U14 U19 U22
....	....	....	....	....	....	1..4	..	U20
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	....	.2..	..	U13 U21 U23
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	..34	....	..	U09
....	....	....	....	....	...4	....	..	U09 U12 U15 U16
....	....	....	....	....	..3.	....	..	U09 U11 U15 U17

REVISION

COPIE A: IND. REC.

UNIT K270

COMPIL. GE 425

APPR.

EMISS. AUG 1-1968

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

PIASTRA-BOARD CONT 2A 1 0610010 S

PROVA-TEST = 20

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	O	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U12 U19 U23
....	....	....	....	....	....	.2..	..	U08 U13
....	....	....	....	....	....	1...	..	U11 U18 U20 U23
....	....	....	....	....	...4	....	..	U12 U15 U16
....	....	....	....	....	.23.	....	..	U09 U17
....	....	....	....	....	..3.	....	..	U09 U11 U15
....	....	....	....	....	.2..	....	..	U07

COPIE A: TOT. REG. RIV.

REVISIONI

PIASTRA-BOARD CONT 2A II 0610010 S

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	...4	..	U08 U18 U20 U22 U23
....	....	....	....	....	....	..3.	..	U12 U19 U22 U23
....	....	....	....	....	....	.2..	..	U13
....	....	....	....	....	....	1...	..	U14 U20
....	....	....	....	....	...4	....	..	U12 U15 U16
....	....	....	....	....	..3.	....	..	U09 U11 U15

REVISION

PIASTRA-BOARD CONT 2A II 0610010 S

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U12 U19 U23
....	....	....	....	....	....	.2..	..	U08 U13
....	....	....	....	....	....	1...	..	U11 U14 U18 U20
....	....	....	....	....	...4	....	..	U12 U15 U16 U23
....	....	....	....	....	..3.	....	..	U09 U11 U15 U17

REVISION

PIASTRA-BOARD CONT 2A II 0610010 S

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	••••	••••	.2	U24
••••	••••	••••	••••	••••	••••	••..	1.	U14 U19 U22 U23
••••	••••	••••	••••	••••	••••	..4	..	U20
••••	••••	••••	••••	••••	••••	1.3.	..	U18 U23
••••	••••	••••	••••	••••	••••	..3.	..	U12 U18 U19
••••	••••	••••	••••	••••	••••	.2..	..	U08 U13
••••	••••	••••	••••	••••	••••	1...	..	U11 U18 U20
••••	••••	••••	••••	••••	...4	••••	..	U15
••••	••••	••••	••••	••••	..3.	••••	..	U09 U11 U15

REVISION

COPIE A:
FO
IND.
REV.

PIASTRA-BOARD CONT 2A II 0610010 S

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	..3.	1.	U22 U23
....	....	....	....	....	....	....	1.	U14 U19
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U12 U18 U19 U22 U23
....	....	....	....	....	....	2...	..	U08 U13
....	....	....	....	....	....	1...	..	U11 U18 U20
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	..3.	....	..	U09 U11 U15 U17

COPIE A: TO:
REV. REV.

REVISION

UNIT K270

COMPIL. GE 425
EMISS. AUG 1,1968
APPR.
SEZ. SEC. SPS - OGE
LOC. PREGNANA (MI)

Nº 400240000
CONT. SU FO. 140 FO. 139

PIASTRA-BOARD CONT 2A II 0610010 S

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U23 U24
....	....	....	....	....	...4	1.34	1.	U23
....	....	....	....	....	....	..34	1.	U22
....	....	....	....	....	....	1.3.	1.	U14
....	....	....	....	....	....	....	1.	U14 U19
....	....	....	....	....	....	....	...4	U08 U20
....	....	....	....	....	....	....	..3.	U12 U14 U19
....	....	....	....	....	....	....	.2..	U08 U13
....	....	....	....	....	....	....	1...	U11 U14 U18 U20
....	....	....	....	....	....	...4	....	U12 U15 U16
....	....	....	....	....	....	..3.	....	U09 U11 U15 U17

REVISION

COPIE N. FOGLIO INDICE REF.

PIASTRA-BOARD CONT 2A II 0610010 S

PROVA-TEST n° 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	..3.	1.	U19
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	1..4	..	U28
....	....	....	....	....	....	..4.	..	U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	...4	.2..	..	U13 U23
....	....	....	....	....	....	.2..	..	U13 U23
....	....	....	....	....	....	1...	..	U14 U20
....	....	....	....	....	...4	....	..	U12 U15 U16
....	....	....	....	....	..3.	....	..	U15
....	....	....	....	....	.2..	....	..	U07 U23

REVISIONI

COPIE A:
IND.
REV.

PIASTRA-BOARD CONT 2A II U610U1U S

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	12	U23
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	...4	1.	U22
....	....	....	....	....	....	....	1.	U14 U19
....	....	....	....	....	....	...4	..	U08 U18 U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	....	.2..	..	U08 U13 U21 U23
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	..34	....	..	U15
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	..3.	....	..	U09 U11 U15 U17

REVISION

COPIE A:
TO:
IND. REV.

UNIT K270

COMPIL. GE 425
APPR.
SEZ. SEC. SPS - OGE
LOC. PREGNANA (MI)
Nº 400240000
EMISS. AUG 1,1968
CONT. SU FO. 143 FO. 142

PIASTRA-GUARD CONT 2A II 0618010 S

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U23 U24
....	....	....	....	....	....	..3.	1.	U19
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U19
....	....	....	....	....	....	.2..	..	U08 U13 U21
....	....	....	....	....	....	1...	..	U11 U14 U18 U20
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	..3.	....	..	U09 U11 U15 U17 U23

COPIE AI TOT.
INU. REV.

REVISION

UNIT K270

COMPIL. GE 425
EMISS. AUG 1,1968
APPR.
SEZ. SPS - OGE
LOC. PREGNANA (MI)
N° 400240000
CONT. SU FO. 144 FO. 143

[illegible] BOARD CONT ZA II 0610010 S

PROVA-TEST # 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	.2	U23 U24
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	.3.	1.	U14
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	1.	U14 U19 U22
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	.4	U08 U20
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	.3.	..	U14 U19
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	.34	12..	..	U21 U23
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	.2..	..	U13 U21
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	.34	1...	..	U21
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	1...	..	U11 U20
[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	.4	....	..	U12 U15
[illegible]	[illegible]	[illegible]	[illegible]	.3.	[illegible]	....	..	U09 U11 U15

SOPRA A: / INCL. A: / SOST. A:

REVISIONI

UNIT K270

COMPIL. [illegible] 325 APPR. SEZ. SPS - OGE

EMISS. [illegible] 36A LOC. PREGNANA (MI)

Nº 40024000

CONT SU FO. 145 FO. 144

PIASTRA-BOARD CONT 2A II 0610010 S

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	12	U23
....	....	....	....	....	....	....	.2	U24
....	....	....	....	....	....	1.3.	1.	U14
....	....	....	....	....	....	....	1.	U14 U19
....	....	....	....	....	....	.2.4	..	U08
....	....	....	....	....	....	...4	..	U08 U20
....	....	....	....	....	....	..3.	..	U12 U14 U19
....	....	....	....	....	.234	12..	..	U13 U23
....	....	....	....	....	....	.2..	..	U08 U13 U21
....	....	....	....	....	.234	1...	..	U13
....	....	....	....	....	....	1...	..	U11 U14 U20
....	....	....	....	....	..34	....	..	U09
....	....	....	....	....	...4	....	..	U09 U12 U15
....	....	....	....	....	..3.	....	..	U09 U11 U15
....	....	....	....	....	.2..	....	..	U07

REVISION

PIASTRA-BOARD COVE 2A 0610011 T

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	....	....	..	U09 U11 U12 U14 U15
....	....	....	..3.	....	....	....	..	U14
....	....	.2..	1...	....	....	....	..	U10
....	....	....	1...	....	....	....	..	U10
....	....	12..	....	....	....	....	..	U13
....	....	.2..	....	....	....	....	..	U10
....	...4	....	....	....	....	....	..	U13
....	.2..	....	....	....	....	....	..	U13
.2..	....	....	....	....	....	....	..	U13

PIASTRA-BOARD COVE 2A 0610011 T

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	...4	1...	....	....	..	U11
....	....	....	....	1...	....	....	..	U09 U11 U12 U14 U15
....	....	....	...4	....	....	....	..	U11
....	....	....	..3.	....	....	....	..	U14
....	....	....	1...	....	....	....	..	U10
....	....	12..	....	....	....	....	..	U13
....	....	.2..	....	....	....	....	..	U10
....	...4	....	....	....	....	....	..	U13
....	.2..	....	....	....	....	....	..	U13
.2..	....	....	....	....	....	....	..	U13

REVISION

COPIE A:
TO.
ING.
REV.

PIASTRA-BOARD COVE 2A 0610011 T

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	....	....	..	U12 U14 U15
....	....	....	..3.	....	....	....	..	U14
....	....	....	1...	....	....	....	..	U10
.2..	.24	12..	....	....	....	....	..	U13
....	....	12..	....	....	....	....	..	U13
....	....	.2..	....	....	....	....	..	U10
....	...4	....	....	....	....	....	..	U13
....	.2..	....	....	....	....	....	..	U13
.2..	....	....	....	....	....	....	..	U13

REVISION

COPIE A: TO. IND. REV.

UNIT K270

COMPIL. GE 425 APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

CONT. SU FO. 154 FO. 153

PIASTRA-BOARD COVE 2A 0610011 1

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	....	....	..	U12 U14 U15
....	....	....	1...	....	....	....	..	U10
....	....	2..	....	....	....	....	..	U10

PIASTRA-BOARD CUVE 2A 0610011 1

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	....	....	..	U12 U14 U15
....	....	....	..3.	....	....	....	..	U14
....	....	.2..	1...	....	....	....	..	U10
....	....	....	1...	....	....	....	..	U10
....	....	.2..	....	....	....	....	..	U10

REVISION

PIASTRA-BOARD COVE 2A 0610011 1

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	...4	1...	....	....	..	U11
....	....	....	..3.	1...	....	....	..	U14
....	....	....	....	1...	....	....	..	U09 U11 U12 U14 U15
....	....	....	...4	....	....	....	..	U11
....	....	....	..3.	....	....	....	..	U14
....	....	.2..	....	....	....	....	..	U10

PIASTRA-BOARD CUVE 2A 0610011 1

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	....	....	..	U09 U11 U14
....	....	....	..3.	....	....	....	..	U14
....	....	....	1...	....	....	....	..	U10
....	....	2..	....	....	....	....	..	U10

REVISION

PIASTRA-BOARD COVE 2A 0610011 1

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	....	....	..	U11 U12 U14
....	....	....	..3.	....	....	....	..	U14
....	....	.2..	....	....	....	....	..	U10

REVISION

COPIE A:
TO:
REV.
REV.

UNIT K270

COMPIL. GF 425
EMISS. AUG 1,1968

APPR.

SEZ. SEC. SPS - OGE
LOC. PREGNANA (MI)

Nº 400240000
CONT. SU FO. 159 FO. 158

PIASTRA-BOARD COVE 2A 0610011 1

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	....	....	..	U09 U11 U14
....	....	....	..3.	....	....	....	..	U14
....	....	.2..	....	....	....	....	..	U10

PIASTRA-BOARD COVE 2A 0610011 1

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	....	....	..	U11 U12 U14
....	....	....	...4	....	....	....	..	U11
....	....	....	..3.	....	....	....	..	U14
....	....	.2..	....	....	....	....	..	U10

REVISION

COPIE A: TO:
IND. REV.

PIASTRA-BOARD COVE 2A 0610011 1

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..3.	1...	....	....	..	U14
....	....	....	....	1...	....	....	..	U14
....	....	....	...4	....	....	....	..	U11
....	....	....	..3.	....	....	....	..	U14
....	....	.2..	....	....	....	....	..	U10

PIASTRA-BUARD CUVE 2A 0610011 I

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..3.	1...	....	....	..	U14
....	....	....	....	1...	....	....	..	U14
....	....	....	...4	....	....	....	..	U11
....	....	....	..3.	....	....	....	..	U14
....	....	.2..	....	....	....	....	..	U10

REVISION

COPIE A:
IND.
ESA.
TO:

UNIT K270

COMPIL. GE 425
EMISS. AUG 1,1968
APPR.
SEZ. SEC. SPS - OGE
LOC. PREGNANA (MI)
Nº 400240000
CONT. SU FO. 163 FO. 162

PIASTRA-BOARD COVE 2A 0610011 1

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	....	....	..	U14
....	....	....	...4	....	....	....	..	U11
....	....	....	..3.	....	....	....	..	U14
....	....	.2..	....	....	....	....	..	U10

PIASTRA=BOARD DECO 2A I 0610012 F

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...	...	...	...	...	..34	....	1.	U12
...	...	...	...	...	....	....	1.	U12
...	...	...	...	...	....	1..4	..	U10
...	...	...	...	1...	.2..	..3.	..	U08
...	...	...	...	1...	....	..3.	..	U08
...	...	...	...	...	....	..3.	..	U15
...	...	...	...	...	....	.2..	..	U13 U15
...	...	...	...	...	....	1...	..	U15
...	...	...	...	...	...4	....	..	U06 U12
...	...	...	...	...	..3.	....	..	U12
...	...	...	...	...	.2..	....	..	U08 U09 U12

REVISION

COPIE AI TO. IND. REV.

PIASTRA-BOARD DECU 2A 1 061 ÷ 12 F

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••••	•••••	•••••	•••••	•••••	•23••	•••••	1•	U12
•••••	•••••	•••••	•••••	•••••	•••••	•••••	1•	U12
•••••	•••••	•••••	•••••	•••••	•••••	1••4	••	U10
•••••	•••••	•••••	•••••	•••••	•••••	123•	••	U15
•••••	•••••	•••••	•••••	1••••	•••••	••3•	••	U08
•••••	•••••	•••••	•••••	••••	•••••	••3•	••	U15
•••••	•••••	•••••	•••••	•••••	•••••	•2••	••	U13 U15
•••••	•••••	•••••	•••••	•••••	•••••	1•••	••	U15
•••••	•••••	•••••	•••••	•••••	••••4	•••••	••	U06 U07 U09 U12
•••••	•••••	•••••	•••••	•••••	••3••	•••••	••	U12
•••••	•••••	•••••	•••••	•••••	•2•••	•••••	••	U08 U09 U12

PIASTRA-BOARD DECO 24 I 0610012 F

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	....	1.	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	1..4	..	U10
....	....	....	....	....	....	1.3.	..	U15
....	....	....	....	1...	....	..3.	..	U08
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	.2.4	....	..	U09
....	....	....	....	....	...4	....	..	U06 U09 U12
....	....	....	....	....	..3.	....	..	U12
....	....	....	....	....	.2..	....	..	U12

REVISION

COPIE AL
ING.
REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

CONT. SU FO. 174 FO. 173

PIASTRA-BOARD DECO 2A I 0610012 F

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	....	1.	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	1..4	..	U10
....	....	....	....	....	....	123.	..	U15
....	....	....	....	1...	....	..3.	..	U08
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	...4	....	..	U06 U07 U12
....	....	....	....	....	..3.	....	..	U12
....	....	....	....	....	.2..	....	..	U08 U09 U12

REVISION

COPIE A: IND. REV.

PIASTRA-BOARD DECO 2A I U610U12 F

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	....	1.	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	1..4	..	U10
....	....	....	....	....	....	123.	..	U15
....	....	....	....	1...	....	..3.	..	U08
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	.2.4	....	..	U09
....	....	....	....	....	...4	....	..	U06 U09 U12
....	....	....	....	....	..3.	....	..	U12
....	....	....	....	....	.2..	....	..	U12

REVISION

COPIE AI FO.
IND. REV.

PIASTRA-BOARD DECO ZA I 0610012 F

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	....	1.	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	1..4	..	U10
....	....	....	....	1...	....	..3.	..	U08
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	.2.4	....	..	U09
....	....	....	....	....	...4	....	..	U06 U09 U12
....	....	....	....	....	..3.	....	..	U12
....	....	....	....	....	.2..	....	..	U08 U09 U12

REVISION

PIASTRA-BOARD DECO 2A 1 0610012 F

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••••	•••••	•••••	•••••	•••••	•234	•••••	1•	U12
•••••	•••••	•••••	•••••	•••••	•••••	•••••	1•	U12
•••••	•••••	•••••	•••••	•••••	•••••	1•.4	••	U10
•••••	•••••	•••••	•••••	1••••	•••••	••3•	••	U08
•••••	•••••	•••••	•••••	•••••	•••••	••3•	••	U15
•••••	•••••	•••••	•••••	•••••	•••••	•2••	••	U13 U15
•••••	•••••	•••••	•••••	•••••	•••••	1•••	••	U15
•••••	•••••	•••••	•••••	•••••	•••4	•••••	••	U06 U07 U12
•••••	•••••	•••••	•••••	•••••	••3•	•••••	••	U12
•••••	•••••	•••••	•••••	•••••	•2••	•••••	••	U08 U09 U12

REVISION

COPIE A: NO. REV. FOI

UNIT K270

COMPIL. GE 425

APPR. RL

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

EMISS. AUG 1,1968

N° 400240000

CONT. SU FO. 178 FO. 177

PIASTRA-BOARD DECO 2A I 0610012 F

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...	....	....	....	....	.234	....	1.	U12
...	....	....	....	....	....	....	1.	U12
...	....	....	....	....	....	1..4	..	U10
...	....	....	....	1...	....	..3.	..	U08
...	....	....	....	....	....	..3.	..	U15
...	....	....	....	....	....	.2..	..	U13 U15
...	....	....	....	....	....	1...	..	U15
...	....	....	....	....	...4	....	..	U06 U07 U12
...	....	....	....	....	..3.	....	..	U12
...	....	....	....	....	.2..	....	..	U08 U09 U12

PIASTRA-BOARD DECO 2A I 0610012 F

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	....	1.	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	1..4	..	U10
....	....	....	....	1...	....	..3.	..	U08
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	...4	....	..	U06 U07 U12
....	....	....	....	....	..3.	....	..	U12
....	....	....	....	....	.2..	....	..	U08 U09 U12

REVISION

COPIE A: CO. IND. REV.

PIASTRA-BOARD DECO 2A I 0610012 F

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••	•••	•••	•••	•••	.2.4	•••	1.	U12
•••	•••	•••	•••	•••	•••	•••	1.	U12
•••	•••	•••	•••	•••	•••	1.3.	..	U15
•••	•••	•••	•••	•••	•••	.3.	..	U15
•••	•••	•••	•••	•••	•••	.2.	..	U13 U15
•••	•••	•••	•••	•••	•••	1..	..	U15
•••	•••	•••	•••	•••	..4	•••	..	U12
•••	•••	•••	•••	•••	.3.	•••	..	U05 U07 U09 U12
•••	•••	•••	•••	•••	2..	•••	..	U08 U09 U12

PIASTRA-BOARD DECO 2A I 0610012 F

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••	••••	••••	••••	••••	••34	••••	1•	U12
•••	••••	••••	••••	••••	••••	••••	1•	U12
•••	••••	••••	••••	••••	••••	1•3•	••	U15
•••	••••	••••	••••	••••	••••	••3•	••	U15
•••	••••	••••	••••	••••	••••	••2•	••	U13 U15
•••	••••	••••	••••	••••	••••	1•••	••	U15
•••	••••	••••	••••	••••	••4•	••••	••	U12
•••	••••	••••	••••	••••	••3•	••••	••	U05 U12
•••	••••	••••	••••	••••	••2•	••••	••	U08 U09 U12

PIASTRA-BOARD DECO 2A I 0610012 F

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	....	1.	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	1.3.	..	U15
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	...4	....	..	U12
....	....	....	....	....	.23.	....	..	U09
....	....	....	....	....	..3.	....	..	U05 U09 U12
....	....	....	....	....	.2..	....	..	U12

REVISION

PIASTRA-BOARD DECO 2A I 0610012 F

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	....	1.	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	1.3.	..	U15
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	...4	....	..	U12
....	....	....	....	....	.23.	....	..	U09
....	....	....	....	....	..3.	....	..	U05 U09 U12
....	....	....	....	....	.2..	....	..	U12

REVISION

COPIE A:
IND. REV.

UNIT K270

COMPIL. GE 425
APPR.
SEZ. SEC. SPS - OGE
Nº 400240000

EMISS. AUG 1,1968
LOC. PREGNANA (MI)
CONT. SU FO. 184 FO. 183

PIASTRA-BOARD DECO 2A 1 0610012 F

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	....	1.	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	1.3.	..	U15
....	....	....	....	....	....	....	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1....	..	U15
....	....	....	....	....	...4	....	..	U12
....	....	....	....	....	.23.	....	..	U09
....	....	....	....	....	..3.	....	..	U05 U09 U12
....	....	....	....	....	.2..	....	..	U08 U09 U12

REVISION

COPIE N.
IND. REV.

PIASTRA-BOARD DECO 2A 1 0610012 F

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••	••••	••••	••••	••••	•234	••••	1•	U12
•••	••••	••••	••••	••••	••••	••••	1•	U12
•••	••••	••••	••••	••••	••••	1•3•	••	U15
•••	••••	••••	••••	••••	••••	••3•	••	U15
•••	••••	••••	••••	••••	••••	•2••	••	U13 U15
•••	••••	••••	••••	••••	••••	1•••	••	U15
•••	••••	••••	••••	••••	•••4	••••	••	U12
•••	••••	••••	••••	••••	•3••	••••	••	U05 U12
•••	••••	••••	••••	••••	•2••	••••	••	U08 U09 U12

PIASTRA-BOARD DECO 2A 1 0610012 F

PROVA-TEST # 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	....	1.	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	1.3.	..	U15
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	...4	....	..	U12
....	....	....	....	....	..3.	....	..	U05 U07 U12
....	....	....	....	....	.2..	....	..	U08 U09 U12

REVISION

COPIE A: TO: IND. INV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

EMISS. AUG 1,1968

N° 400240000

CONT. SU FO. 187 FO. 186

PIASTRA-BOARD DECO 2A I 0610012 F

PROVA-TEST = 17

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••••	•••••	•••••	•••••	•••••	•234	••••	1•	U12
•••••	•••••	•••••	•••••	•••••	••••	••••	1•	U12
•••••	•••••	•••••	•••••	•••••	••••	1•3•	••	U15
•••••	•••••	•••••	•••••	•••••	••••	••3•	••	U15
•••••	•••••	•••••	•••••	•••••	••••	•2••	••	U13 U15
•••••	•••••	•••••	•••••	•••••	••••	1•••	••	U15
•••••	•••••	•••••	•••••	•••••	••4•	••••	••	U12
•••••	•••••	•••••	•••••	•••••	••3•	••••	••	U05 U12
•••••	•••••	•••••	•••••	•••••	•2••	••••	••	U08 U09 U12

COPIE A:
IND.
REV.

REVISION

PIASTRA-BOARD DECO 2A I 0610012 F

PROVA-TEST = 18

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘234	∘∘∘∘	1∘	U12
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘	U12
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘3∘	∘∘	U15
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘	U15
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘∘	∘∘	U13 U15
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘∘	∘∘	U15
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘∘∘	∘∘	U12
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘∘∘	∘∘	U05 U07 U12
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘∘	∘∘∘∘	∘∘	U08 U09 U12

COPIE A:
IND. REV.:

REVISION

PIASTRA-BOARD DECO 2A I U610012 F

PROVA-TEST = 19

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	····	····	1·	U04 U07 U09 U12
····	····	····	····	····	····	1·3·	··	U15
····	····	····	····	····	····	··3·	··	U15
····	····	····	····	····	····	·2··	··	U13 U15
····	····	····	····	····	····	1···	··	U15
····	····	····	····	····	·234	····	··	U12
····	····	····	····	····	··4	····	··	U12
····	····	····	····	····	··3·	····	··	U12
····	····	····	····	····	·2··	····	··	U08 U09 U12

PIASTRA-BOARD DECO 2A I U610012 F

PROVA-TEST = 20

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..34	....	1.	U12
....	....	....	....	....	....	....	1.	U04 U12
....	....	....	....	....	....	1.3.	..	U15
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	...4	....	..	U12
....	....	....	....	....	..3.	....	..	U12
....	....	....	....	....	.2..	....	..	U08 U09 U12

REVISION

PIASTRA-BOARD DECO 2A II 0610012 1

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•	•	•	•	•	234	•	1	U12
•	•	•	•	•	2	•	1	U09
•	•	•	•	•	•	•	1	U04 U09 U12
•	•	•	•	•	•	13	•	U15
•	•	•	•	•	•	3	•	U15
•	•	•	•	•	•	2	•	U13 U15
•	•	•	•	•	•	1	•	U15
•	•	•	•	•	4	•	•	U12
•	•	•	•	•	3	•	•	U12
•	•	•	•	•	2	•	•	U12

COPIE A:
IND. REV.

REVISION

PIASTRA-BOARD DECO 2A II 0610012 F

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘234	∘∘∘∘	1∘	U12
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘∘	∘∘∘∘	1∘	U09
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘	U04 U09 U12
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘3∘	∘∘	U15
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘	U15
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘∘	∘∘	U13 U15
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘∘	∘∘	U15
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘4∘	∘∘∘∘	∘∘	U12
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘∘∘	∘∘	U12
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘∘	∘∘∘∘	∘∘	U12

REVISION

COPIE A.C. IND. REV.

		UNIT K270	
COMPIL. GE 425	APPR.	SEZ. SEC. SPS - OGE	Nº 400240000
EMISS. AUG 1, 1968		LOC. PREGNANA (MI)	CONT. SU FO. 193 FO. 192

PIASTRA-BOARD DECO 2A II 0610012 F

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
					234		1	U12
					2		1	U09
							1	U04 U09 U12
						13		U15
						3		U15
						2		U13 U15
						1		U15
					4			U12
					3			U12
					2			U08 U09 U12

PIASTRA-BOARD DECO 2A II 0610U12 F

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	....	1.	U12
....	....	....	....	....	....	....	1.	U04 U07 U12
....	....	....	....	....	....	1.3.	..	U15
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	...4	....	..	U12
....	....	....	....	....	..3.	....	..	U12
....	....	....	....	....	.2..	....	..	U08 U09 U12

REVISION

PIASTRA-BOARD DECO 2A II 0610U12 F

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••	•••	•••	•••	•••	•234	•••	1•	U12
•••	•••	•••	•••	•••	•••	•••	1•	U04 U12
•••	•••	•••	•••	•••	•••	1•3•	••	U15
•••	•••	•••	•••	•••	•••	••3•	••	U15
•••	•••	•••	•••	•••	•••	•2••	••	U13 U15
•••	•••	•••	•••	•••	•••	1•••	••	U15
•••	•••	•••	•••	•••	••4	•••	••	U12
•••	•••	•••	•••	•••	••3•	•••	••	U12
•••	•••	•••	•••	•••	•2••	••••	••	U08 U09 U12

COPIE N.
IND. REV.

REVISION

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOG. PREGNANA (MI)

EMISS. AUG 1,1968

Nº 400240000

CONT. SU FO. 196 FO. 195

PIASTRA-BOARD DECO 2A II 0610012 F

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	•234	••••	1•	U12
••••	••••	••••	••••	••••	••••	••••	1•	U04 U07 U12
••••	••••	••••	••••	••••	••••	1•3•	••	U15
••••	••••	••••	••••	••••	••••	•••3•	••	U15
••••	••••	••••	••••	••••	••••	•2••	••	U13 U15
••••	••••	••••	••••	••••	••••	1•••	••	U15
••••	••••	••••	••••	••••	•••4	••••	••	U12
••••	••••	••••	••••	••••	••3•	••••	••	U12
••••	••••	••••	••••	••••	•2••	••••	••	U08 U09 U12

REVISION

COPIE A: TOI
IND. INT.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1, 1968

CONT. SU FO. 197 FO. 196

PIASTRA-BOARD DECO 2A II 0610012 F

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	.234	••••	1.	U12
••••	••••	••••	••••	••••	••••	••••	1.	U04 U12
••••	••••	••••	••••	••••	••••	1.3.	..	U15
••••	••••	••••	••••	••••	••••	.3..	..	U15
••••	••••	••••	••••	••••	••••	.2..	..	U13 U15
••••	••••	••••	••••	••••	••••	1...	..	U15
••••	••••	••••	••••	••••	...4	••••	..	U12
••••	••••	••••	••••	••••	.3..	••••	..	U12
••••	••••	••••	••••	••••	.2..	••••	..	U08 U09 U12

REVISION

PIASTRA-BOARD DECO 2A II 0610012 F

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	....	1.	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	1.3.	..	U15
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	...4	....	..	U12
....	....	....	....	....	.3..	....	..	U12
....	....	....	....	....	.2..	....	..	U08 U09 U12

COPIE A:
IND.
REV.

REVISION

UNIT K270

COMPIL. GE 425
EMISS. AUG 1,1968

APPR.

SEN. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000
CONT. SU FO. 201 FO. 198

PIASTRA-BOARD DEEC 2A 0610013 B

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.2..	.2	U22
....	....	....	....	....	.2..	....	.2	U13
....	....	....	....	....	....	....	.2	U13 U18 U22
....	....	....	....	.2..	....	1.3.	1.	U22
....	....	....	....	....	...4	1...	1.	U12
....	....	....	....	....	....	....	1.	U16 U20
....	....	....	....	....	....	....	.4	U20 U22
....	....	....	....	.2..	...4	..3.	..	U23
....	....	....	....	....	....	..3.	..	U13 U23
....	....	....	....	....	....	.2..	..	U20 U22
....	....	....	....	....	....	1...	..	U18 U20
....	....	....	....	....	...4	....	..	U13 U23
....	....	....	....	..3.	..3.	....	..	U12 U19
....	....	....	....	....	..3.	....	..	U19
....	....	....	....	....	.2..	....	..	U13
....	....	....	....	1..4	1...	....	..	U24
....	....	....	....	....	1...	....	..	U24
....	....	....	....	...4	....	....	..	U17 U24
....	....	....	....	..3.	....	....	..	U19
....	....	....	....	.2..	....	....	..	U23 U24
....	....	....	....	1...	....	....	..	U24
....	....	....	...4	....	....	....	..	U21
....	....	....	..3.	....	....	....	..	U12

PIASTRA=BOARD DEEC 2A 0610013 B

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	123.	12..	.234	.2	U22
....	....	....	....	....	.2.4	..3.	.2	U13
....	....	....	....	....	....	....	.2	U13
....	....	....	....	....	....	1...	1.	U20
....	....	....	....	....	....	....	1.	U20
....	....	....	....	....	....	....	4	U20 U22
....	....	....	....	.2..	....	..3.	..	U22
....	....	....	....	....	....	..3.	..	U13 U23
....	....	....	....	....	....	.2..	..	U20 U22
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	...4	....	..	U12 U13 U23
....	....	....	....	1.3.	1.3.	....	..	U12
....	....	....	....	.3.	..3.	....	..	U12 U19
....	....	....	....	....	.3.	....	..	U19
....	....	....	....	1.3.	12..	....	..	U22
....	....	....	....	....	.2..	....	..	U13 U17
....	....	....	....	12..	1...	....	..	U24
....	....	....	....	....	1...	....	..	U16 U24
....	....	....	.3.	...4	....	....	..	U17
....	....	....	....	...4	....	....	..	U17 U24
....	....	....	....	.3.	....	....	..	U16 U19
....	....	....	....	.2..	....	....	..	U23 U24
....	....	....	....	1...	....	....	..	U18 U24
....	....	....	...4	....	....	....	..	U21
....	....	....	.3.	....	....	....	..	U12 U17

COPIE N.
TO:
REV. NO.
REV. DATE

REVISION

PIASTRA-BOARD DEEC 2A 0610013 B

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
				1.3.	.3.		.2	U22
				1...			.2	U18
							.2	U13 U18 U22
						12.4	1.	U20
			.3.			1...	1.	U12
						1...	1.	U12
							1.	U16 U20
				1...		2.4	..	U12
							..	U20 U22
					2.4	.3.	..	U13
						.3.	..	U13 U23
						2..	..	U20 U22
						1...	..	U18 U20
							..	U13
						.3.	..	U19
					2..		..	U13 U17
				2.4	1...		..	U24
					1...		..	U16 U24
							..	U24
					.3.		..	U16 U19
				2..			..	U23 U24
				1...			..	U18 U24
							..	U21
							..	U12 U17

REVISION

COPIE A: TO:
IND. REV.

PIASTRA-BOARD DEEC 2A 0610013 B

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.2.4	..3.	.2	U13
....	....	....	....	....	....	....	.2	U13
....	....	....	....	....	....	12.4	1.	U20
....	....	....	....	....	....	....	1.	U20
....	....	....	....	1.34	1.3.	.2.4	..	U12
....	....	....	....	....	....	...4	..	U20 U22
....	....	....	....	....	....	..3.	..	U13
....	....	....	....	....	....	.2..	..	U20 U22
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	...4	....	..	U13 U23
....	....	....	....	..3.	..3.	....	..	U12 U19
....	....	....	....	....	..3.	....	..	U19
....	....	....	....	....	.2..	....	..	U13
....	....	....	....	12.4	1...	....	..	U24
....	....	....	....	....	1...	....	..	U24
....	....	....	....	...4	....	....	..	U17 U24
....	....	....	....	..3.	....	....	..	U19
....	....	....	....	.2..	....	....	..	U24
....	....	....	....	1...	....	....	..	U24
....	....	....	...4	....	....	....	..	U21
....	....	....	..3.	....	....	....	..	U12

PIASTRA-BOARD DEEC 2A V610U13 B

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	1..4	12	U22
....	....	....	....	....	....	1...	12	U22
....	....	....	....	....	...4	..3.	.2	U13
....	....	....	....	....	....	....	.2	U13 U18
....	....	....	....	....	....	12..	1.	U20
....	....	....	....	....	....	....	1.	U16 U20
....	....	....	....	....	....	...4	..	U20 U22
....	....	....	....	....	....	..3.	..	U13
....	....	....	....	1.34	..3.	.2..	..	U12
....	....	....	....	....	....	.2..	..	U20 U22
....	....	....	....	....	....	1...	..	U18 U20
....	....	....	....	....	...4	....	..	U13 U23
....	....	....	....	..3.	..3.	....	..	U19
....	....	....	....	....	..3.	....	..	U19
....	....	....	....	....	12..	....	..	U22
....	....	....	....	....	.2..	....	..	U13 U17
....	....	....	....	....	1...	....	..	U16 U24
....	....	....	....	12.4	....	....	..	U24
....	....	....	....	...4	....	....	..	U17 U24
....	....	....	....	..3.	....	....	..	U16 U19
....	....	....	....	.2..	....	....	..	U24
....	....	....	....	1...	....	....	..	U18 U24
....	....	....	...4	....	....	....	..	U21
....	....	....	..3.	....	....	....	..	U12 U17

PIASTRA-BOARD DEEC 2A 0610013 B

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••••	•••••	•••••	•••••	•••••	.2.4	..3.	.2	U13
•••••	•••••	•••••	•••••	•••••	•••••	•••••	.2	U13 U18
•••••	•••••	•••••	•••••	•••••	•••••	12.4	1.	U20
•••••	•••••	•••••	•••••	•••••	•••••	•••••	1.	U16 U20
•••••	•••••	•••••	•••••	1.34	1.3.	.2.4	..	U12
•••••	•••••	•••••	•••••	•••••	•••••	...4	..	U20
•••••	•••••	•••••	•••••	•••••	•••••	..3.	..	U13
•••••	•••••	•••••	•••••	•••••	•••••	.2..	..	U20
•••••	•••••	•••••	•••••	•••••	•••••	1...	..	U18 U20
•••••	•••••	•••••	•••••	•••••	...4	•••••	..	U13
•••••	•••••	•••••	•••••	..3.	..3.	•••••	..	U12 U19
•••••	•••••	•••••	•••••	•••••	..3.	•••••	..	U19
•••••	•••••	•••••	•••••	•••••	.2..	•••••	..	U13
•••••	•••••	•••••	•••••	12.4	1...	•••••	..	U24
•••••	•••••	•••••	•••••	•••••	1...	•••••	..	U24
•••••	•••••	•••••	•••••	...4	•••••	•••••	..	U24
•••••	•••••	•••••	•••••	..3.	•••••	•••••	..	U19
•••••	•••••	•••••	•••••	.2..	•••••	•••••	..	U24
•••••	•••••	•••••	•••••	1...	•••••	•••••	..	U24
•••••	•••••	•••••	...4	•••••	•••••	•••••	..	U21
•••••	•••••	•••••	..3.	•••••	•••••	•••••	..	U12

PIASTRA-BOARD DEEC 2A 0610013 B

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	..3.	....	.2..	.2	U22
....	....	....	....	.2.4	....	....	.2	U13
....	....	....	....	..3.	....	....	.2	U22
....	....	....	....	....	....	....	.2	U13 U18
....	....	....	....	....	....	1..4	1.	U20
....	....	....	..3.	....	...4	....	1.	U12
....	....	....	....	....	...4	....	1.	U12
....	....	....	....	....	....	....	1.	U16 U20
....	....	....	....	....	....	...4	..	U20 U22
....	....	....	....	....	....	..3.	..	U13 U22 U23
....	....	....	....	....	....	.2..	..	U20 U22
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	...4	....	..	U13 U23
....	....	....	....	..3.	..3.	....	..	U12 U19
....	....	....	....	....	.3..	....	..	U19
....	....	....	....	....	.2..	....	..	U13
....	....	....	....	12.4	1...	....	..	U24
....	....	....	....	....	1...	....	..	U24
....	....	....	....	...4	....	....	..	U24
....	....	....	....	..3.	....	....	..	U16 U19
....	....	....	....	.2..	....	....	..	U23 U24
....	....	....	....	1...	....	....	..	U24
....	....	....	...4	....	....	....	..	U21
....	....	....	..3.	....	....	....	..	U12 U17

PIASTRA-BOARD DEEC 2A 0610013 B

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.2.4	..3.	.2	U13
....	....	....	....	....	....	....	.2	U13
....	....	....	....	....	....	12.4	1.	U20
....	....	....	....	....	....	....	1.	U20
....	....	....	....	1.34	1.3.	.2.4	..	U12
....	....	....	....	....	....	...4	..	U20 U22
....	....	....	....	....	....	..3.	..	U13
....	....	....	....	....	....	.2..	..	U20
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	...4	....	..	U13
....	....	....	....	.3.	.3.	....	..	U19
....	....	....	....	....	.3.	....	..	U19
....	....	....	....	....	.2..	....	..	U13 U17
....	....	....	....	12.4	1...	....	..	U24
....	....	....	....	....	1...	....	..	U16 U24
....	....	....	....	...4	....	....	..	U24
....	....	....	....	.3.	....	....	..	U16 U19
....	....	....	....	.2..	....	....	..	U24
....	....	....	....	1...	....	....	..	U18 U24
....	....	....	...4	....	....	....	..	U21
....	....	....	.3.	....	....	....	..	U12 U17

REVISION

COPIE A:
IND.
REF.

PIASTRA-BOARD DEEC 24 0610013 B

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...	....	....	....	....	.2.4	..3.	.2	U13
...	....	....	....	....	....	....	.2	U13
...	....	....	....	....	....	12.4	1.	U20
...	....	....	....	....	....	....	1.	U20
...	....	....	....	1..4	1...	.2.4	..	U12
...	....	....	....	....	....	...4	..	U20
...	....	....	....	....	....	..3.	..	U13 U23
...	....	....	....	....	....	.2..	..	U20 U22
...	....	....	....	....	....	1...	..	U20
...	....	....	....	....	...4	....	..	U13
...	....	....	..3.	..3.	..3.	....	..	U12
...	....	....	....	..3.	..3.	....	..	U12
...	....	....	....	....	..3.	....	..	U19
...	....	....	....	....	.2..	....	..	U13
...	....	....	....	12.4	1...	....	..	U24
...	....	....	....	....	1...	....	..	U24
...	....	....	....	...4	....	....	..	U24
...	....	....	....	..3.	....	....	..	U19
...	....	....	....	.2..	....	....	..	U23 U24
...	....	....	....	1...	....	....	..	U24
...	....	....	...4	....	....	....	..	U21
...	....	....	..3.	....	....	....	..	U12

REVISION

PIASTRA=BOARD DEEC 2A 0610013 8

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.2.4	..3.	.2	U13
....	....	....	....	....	....	....	.2	U13
....	....	....	....	....	....	1...	1.	U20
....	....	....	....	....	....	....	1.	U20
....	....	....	..3.	1.34	1.3.	.2.4	..	U12
....	....	....	....	1.34	1.3.	.2.4	..	U12
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U13
....	....	....	....	....	....	.2..	..	U20
....	....	....	....	....	....	1...	..	U20
....	....	....	....	....	...4	....	..	U13
....	....	....	....	....	..3.	....	..	U19
....	....	....	....	....	.2..	....	..	U13 U17
....	....	....	....	....	1...	....	..	U24
....	....	....	....	...4	....	....	..	U24
....	....	....	....	..3.	....	....	..	U19
....	....	....	....	.2..	....	....	..	U24
....	....	....	....	1...	....	....	..	U24
....	....	....	...4	....	....	....	..	U21
....	....	....	..3.	....	....	....	..	U12

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA=BOARD REFO 2A 0610014 Y

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	...4	....	123.	12	U07 U09
....	....	....	....	....	....	....	12	U12
....	....	....	....	....	....	....	.2	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	.2..	.23.	..	U15
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	.2..	....	..	U15
....	1.34	1...	1..4	1...	....	....	..	U07
....	..34	....	....	1...	....	....	..	U08
....	...4	....	....	1...	....	....	..	U08 U09
....	....	....	12.4	....	....	....	..	U14
....	....	....	...4	....	....	....	..	U14
....	....	....	.2..	....	....	....	..	U14
....	....	....	1...	....	....	....	..	U14
....	1...	1...	....	....	....	....	..	U11
....	....	1...	....	....	....	....	..	U11
...4	...4	....	....	....	....	....	..	U09
....	...4	....	....	....	....	....	..	U09 U13
....	..3.	....	....	....	....	....	..	U08 U13
....	1...	....	....	....	....	....	..	U11 U13
...4	....	....	....	....	....	....	..	U07 U09

REVISION

PIASTRA-BOARD DEFO 2A 0610014 Y

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1..4	....	123.	12	U09
....	....	....	....	...4	....	123.	12	U07 U09
....	....	....	....	...4	....	....	.2	U12
....	....	....	....	...4	....	....	1.	U12
....	....	....	....	...4	....	...3.	..	U15
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	.2..	....	..	U15
....	....	....	....	...4	....	....	..	U12
...4	1.34	1...	1..4	1...	....	....	..	U07
....	1.34	1...	1..4	1...	....	....	..	U07
....	...4	....	....	1...	....	....	..	U08 U09
....	....	....	...4	....	....	....	..	U14
....	....	....	.2..	....	....	....	..	U14
....	....	....	1...	....	....	....	..	U14
....	....	1...	....	....	....	....	..	U11
....	1.34	....	....	....	....	....	..	U13
....	...4	....	....	....	....	....	..	U09 U13
....	..3.	....	....	....	....	....	..	U08 U13
....	1...	....	....	....	....	....	..	U11 U13
...4	....	....	....	....	....	....	..	U07 U09

COPIE A:
TO:
IND.
REV.

REVISION

PIASTRA-BOARD DEFO 2A 0610014 Y

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1..4	....	123.	12	U09
....	....	....	....	...4	....	123.	12	U07 U09
....	....	....	....	...4	....	....	.2	U12
....	....	....	....	...4	....	....	1.	U12
....	....	....	....	...4	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	.2..	....	..	U15
....	....	....	....	...4	....	....	..	U12
...4	1.34	1...	1..4	1...	....	....	..	U07
....	1.34	1...	1..4	1...	....	....	..	U07
....	...4	....	....	1...	....	....	..	U08 U09
....	....	....	...4	....	....	....	..	U14
....	....	....	.2..	....	....	....	..	U14
....	....	....	1...	....	....	....	..	U14
....	....	1...	....	....	....	....	..	U11
....	1.34	....	....	....	....	....	..	U13
....	...4	....	....	....	....	....	..	U09 U13
....	..3.	....	....	....	....	....	..	U08 U13
....	1...	....	....	....	....	....	..	U11 U13
...4	....	....	....	....	....	....	..	U07 U09

REVISIONI

PIASTRA-BOARD DEFO 2A 0610014 Y

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	...4	....	....	.2	U12
....	....	....	....	...4	....	....	1.	U12
....	....	....	....	...4	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	....	1...	..	U07 U09
....	....	....	....	....	.2..	....	..	U15
....	....	....	....	...4	....	....	..	U12
....	...4	....	....	1...	....	....	..	U08 U09
...4	....	....	....	1...	....	....	..	U09
....	....	....	...4	....	....	....	..	U14
....	....	....	.2..	....	....	....	..	U14
....	....	....	1...	....	....	....	..	U14
....	....	1...	....	....	....	....	..	U11
....	1.34	....	....	....	....	....	..	U13
....	...4	....	....	....	....	....	..	U09 U13
....	..3.	....	....	....	....	....	..	U08 U13
....	1...	....	....	....	....	....	..	U11 U13
...4	....	....	....	....	....	....	..	U07 U09

REVISION

COPIE A:
IND. TO:
REV.

UNIT K270

COMPIL. GE 425
EMISS. AUG 1,1968

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 220 FO. 219

PIASTRA-BOARD DEFO 2A 0610014 Y

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	...4	....	....	.2	U12
....	....	....	....	...4	....	....	1.	U12
....	....	....	....	...4	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U15
...4	....	....	....	....	....	1...	..	U07
....	....	....	....	....	....	1...	..	U07 U09
....	....	....	....	....	.2..	....	..	U15
....	....	....	....	...4	....	....	..	U12
....	....	....	....	1...	....	....	..	U08 U09
....	....	....	1..4	....	....	....	..	U07 U14
....	....	....	...4	....	....	....	..	U14
....	....	....	.2..	....	....	....	..	U14
....	....	....	1...	....	....	....	..	U14
....	....	1...	....	....	....	....	..	U11
....	1.34	....	....	....	....	....	..	U13
....	...4	....	....	....	....	....	..	U13
....	..3.	....	....	....	....	....	..	U08 U13
....	1...	....	....	....	....	....	..	U11 U13
...4	....	....	....	....	....	....	..	U07 U09

REVISION

COPIE AI
IND.
REV.

PIASTRA-BOARD DEFO 2A 0610014 Y

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U12
...4	....	....	....	...4	....	1...	1.	U07
....	....	....	....	...4	....	1...	1.	U07 U09
....	....	....	....	...4	....	....	1.	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	.2..	....	..	U15
....	....	....	....	...4	....	....	..	U12
....	...4	....	....	1...	....	....	..	U08 U09
....	....	....	....	1...	....	....	..	U09
....	....	....	...4	....	....	....	..	U14
....	....	....	.2..	....	....	....	..	U14
....	....	....	1...	....	....	....	..	U14
....	....	1...	....	....	....	....	..	U11
....	1.34	....	....	....	....	....	..	U13
....	...4	....	....	....	....	....	..	U09 U13
....	..3.	....	....	....	....	....	..	U08 U13
....	1...	....	....	....	....	....	..	U11 U13
...4	....	....	....	....	....	....	..	U07 U09

REVISION

COPIE AI CO.
IND. RIN.

PIASTRA-BOARD DEFO 2A 0610014 Y

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U12
...4	....	....	....	...4	....	1.3.	..	U07
....	....	....	....	...4	....	1.3.	..	U07 U09
....	....	....	....	...4	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	.2..	....	..	U15
....	....	....	....	...4	....	....	..	U12
....	....	....	....	1...	....	....	..	U07 U08 U09
....	....	....	...4	....	....	....	..	U14
....	1.34	....	....	....	....	....	..	U13
....	...4	....	....	....	....	....	..	U09 U13
....	..3.	....	....	....	....	....	..	U08 U13
....	1...	....	....	....	....	....	..	U11 U13
...4	....	....	....	....	....	....	..	U07

REVISIONS

COPIE A:
TO:
IND. REV.

PIASTRA-BOARD DEFO 2A 0610014 Y

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...4	....	....	....	...4	....	12..	.2	U07
....	....	....	....	...4	....	12..	.2	U07 U09
....	....	....	....	...4	....	....	.2	U12
....	....	....	....	....	....	....	.2	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	...4	....	....	..	U12
....	...4	....	....	1...	....	....	..	U09
....	....	....	....	1...	....	....	..	U09
....	1.34	....	....	....	....	....	..	U13
....	...4	....	....	....	....	....	..	U09 U13
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U13
...4	....	....	....	....	....	....	..	U07

REVISION

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD DEFU 28 U610U15 U

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1...	....	12	U12
....	....	....	....	....	....	....	.2	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	12.4	..	U15
....	....	....	....	....	....	...4	..	U15
....	1...	1..4	....	...4	....	.2..	..	U10
....	1...	....	....	....	....	.2..	..	U10
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	.2.4	.2..	.2..	....	..	U14
....	....	....	....	....	.2..	....	..	U14
....	....	....	....	....	1...	....	..	U12
....	....	...4	....	...4	....	....	..	U10
....	....	....	....	...4	....	....	..	U11
....	....	....	....	.2..	....	....	..	U14
....	....	....	...4	....	....	....	..	U14
....	....	....	.2..	....	....	....	..	U10 U14
....	....	....	1...	....	....	....	..	U11
....	....	1...	....	....	....	....	..	U10
.2..	..3.	....	....	....	....	....	..	U13
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U13
.2..	....	....	....	....	....	....	..	U13

PIASTRA-BUARD DEFU 2B 0610015 0

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	...4	..	U15
....	1...	....	....	....	....	.2..	..	U10 U13
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	.2..	....	..	U14
....	....	....	....	....	1...	....	..	U12
....	....	...4	....	...4	....	....	..	U10
....	....	....	....	...4	....	....	..	U11
....	....	....	....	.2..	....	....	..	U14
....	....	....	...4	....	....	....	..	U14
....	....	....	.2..	....	....	....	..	U10 U14
....	....	....	1...	....	....	....	..	U11
....	....	1...	....	....	....	....	..	U10
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U13
.2..	....	....	....	....	....	....	..	U13

PIASTRA-BOARD DEFO 28 0610015 U

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	...4	..	U15
....	1...	....	....	....	....	.2..	..	U10 U13
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	.2..	....	..	U14
....	....	....	....	....	1...	....	..	U12
....	....	...4	.2..	...4	....	....	..	U10
....	....	...4	....	...4	....	....	..	U10
....	....	....	....	...4	....	....	..	U11
....	....	....	...4	.2..	....	....	..	U14
....	....	....	.2..	....	....	....	..	U14
....	....	....	1...	....	....	....	..	U10 U14
....	....	1...	....	....	....	....	..	U11
....	...3	....	....	....	....	....	..	U10
....	1...	....	....	....	....	....	..	U13
.2..	....	....	....	....	....	....	..	U13
								U13

COPIE A: TO:
INDEX REV.
REVISION

PIASTRA-BOARD DEFO 2B 0610015 U

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U12
....	....	....	....	....	....	....	1.	U12
....	..3.	....	....	....	....	.2..	..	U13
....	....	....	....	....	....	.2..	..	U10 U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	.2..	....	..	U14
....	....	....	....	....	1...	....	..	U12
....	....	...4	....	...4	....	....	..	U10
....	....	....	....	...4	....	....	..	U11
....	....	....	....	.2..	....	....	..	U14
....	....	....	...4	....	....	....	..	U14
....	....	....	.2..	....	....	....	..	U10 U14
....	....	....	1...	....	....	....	..	U11
....	....	1...	....	....	....	....	..	U10
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U13
.2..	....	....	....	....	....	....	..	U13

PIASTRA-BOARD DEFO 28 0610015 U

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	...4	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	....	1...	..	U15
....	....	....	...4	....	.2..	....	..	U14
....	....	....	....	....	.2..	....	..	U14
....	....	....	....	....	1...	....	..	U12
....	....	...4	....	...4	....	....	..	U10
....	....	....	....	...4	....	....	..	U11
....	....	....	....	.2..	....	....	..	U14
....	....	....	...4	....	....	....	..	U14
....	....	....	.2..	....	....	....	..	U10 U14
....	....	....	1...	....	....	....	..	U11
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U13
.2..	....	....	....	....	....	....	..	U13

REVISION

COPIE A:
TO:
INV.
REV.

UNIT K270

COMPIL. GE 425 APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

CONT. SU FO. 231 FO. 230

PIASTRA-BOARD DEFU 2B 0610015 0

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U15
....	....	....	....	....	....	.2..	..	U13 U15
....	....	....	....	....	.2..	....	..	U14
....	....	....	....	...4	....	....	..	U11
....	....	....	...4	....	....	....	..	U14
....	....	....	.2..	....	....	....	..	U10
....	1...	....	....	....	....	....	..	U10 U13
.2..	....	....	....	....	....	....	..	U13

REVISION

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD DERO 2A I 0610016 G

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	····	··3·	··	U12
····	····	····	····	····	····	·2··	··	U15
1··4	····	····	····	····	····	1···	··	U15
···4	····	····	····	····	····	1···	··	U15
····	1···	····	·2··	·2·4	····	····	··	U08
····	····	····	·2··	·2·4	····	····	··	U08
····	····	····	····	···4	····	····	··	U05
····	····	····	····	·.3.	····	····	··	U08
····	····	····	····	·2··	····	····	··	U11
····	····	····	···4	····	····	····	··	U08
····	····	····	1···	····	····	····	··	U04
····	····	···4	····	····	····	····	··	U04
····	··3·	····	····	····	····	····	··	U13
····	1···	····	····	····	····	····	··	U08
···4	····	····	····	····	····	····	··	U13
1···	····	····	····	····	····	····	··	U07 U15

REVISION

PIASTRA-BOARD DERO 2A I 0610016 G

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS							GUASTI - FAULTS
A	B	C	D	E	F	G	H	
						3		U12
						2		U15
2						1		U15
			4	4				U08
				4				U05
				3				U08
				2				U11
			2					U08
			1					U04
		4						U04
	3							U13
	1							U08
2								U10

COPIE A: TOT. REV. REV.

REVISION

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1,1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 238 FO. 237

PIASTRA-BOARD DERO 2A I 0610016

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U09
....	....	....	....	....	....	..3.	..	U12
.2..	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	....	1...	..	U15
....	....	....	...4	...4	....	....	..	U08
....	....	....	....	...4	....	....	..	U05
....	....	....	....	..3.	....	....	..	U08
....	....	....	.2..	....	....	....	..	U08
....	....	....	1...	....	....	....	..	U04
....	....	...4	....	....	....	....	..	U04
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U08
.2..	....	....	....	....	....	....	..	U10

REVISION

COPIE A:
FO.
IND.
REV.

PIASTRA-BOARD DERO 2A I 0610016 B

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U09
....	....	....	....	....	....	.23.	1.	U15
....	....	....	....	....	....	1.3.	1.	U15
....	....	....	...4	....	....	..3.	1.	U08
....	....	....	.2..	....	....	..3.	1.	U08
....	....	....	1...	....	....	..3.	1.	U04
....	1...	....	....	....	....	..3.	1.	U08
....	....	....	....	....	....	..3.	1.	U04 U05 U07 U09 U12
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	....	..3.	..	U12
....	....	....	....	....	1...	....	..	U11
....	....	....	....	..34	....	....	..	U08
....	....	....	....	...4	....	....	..	U05
.2..	....	...4	....	....	....	....	..	U04
....	..3.	....	....	....	....	....	..	U13
...4	....	....	....	....	....	....	..	U13
.2..	....	....	....	....	....	....	..	U10

REVISION

PIASTRA-BOARD DERO 2A 1 0610016 G

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...0	....	....	...4	..34	....	..3.	1.	U08
...0	....	....	...4	....	....	..3.	1.	U08
...0	....	....	....	....	....	..3.	1.	U05 U09 U12
...0	....	....	....	....	....	..3.	..	U12
...0	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	..3.	....	....	..	U08
....	....	....	.2..	....	....	....	..	U08
...0	....	....	1...	....	....	....	..	U04
.2..	....	...4	....	....	....	....	..	U04
...0	..3.	....	....	....	....	....	..	U13
...0	1...	....	....	....	....	....	..	U08
...4	....	....	....	....	....	....	..	U13
.2..	....	....	....	....	....	....	..	U10

REVISION

COPIE A:
TOL.
REV.

PIASTRA=BOARD DERO 2A I 0610016 G

PROVA=TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...	...	...	...	...	...	..3.	1.	U05 U09 U12
....	....	....	....	....	....	..3.	..	U12
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	....	1...	..	U15
.2..	....	...4	....	....	..3.	....	..	U04
.2..	....	....	....	....	..3.	....	..	U10
....	....	....	....	....	..3.	....	..	U04 U12
....	....	....	....	..34	....	....	..	U08
....	....	....	...4	...4	....	....	..	U08
....	....	....	.2..	...4	....	....	..	U08
....	....	....	1...	...4	....	....	..	U04
....	....	....	....	...4	....	....	..	U05
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U08
...4	....	....	....	....	....	....	..	U13

PIASTRA-BOARD DERO 2A I 0610016 0

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	.2..	..34	....	..3.	1.	U08
....	....	....	.2..	....	....	..3.	1.	U08
....	....	....	....	....	....	..3.	1.	U05 U09 U12
....	....	....	....	....	....	..3.	..	U12
...4	....	....	....	....	....	.2..	..	U15
...4	....	....	....	....	....	1...	..	U15
....	....	....	....	.3.	....	....	..	U08
....	....	....	...4	....	....	....	..	U08
....	....	....	1...	....	....	....	..	U04
.2..	....	...4	....	....	....	....	..	U04
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U08
...4	....	....	....	....	....	....	..	U13
.2..	....	....	....	....	....	....	..	U10

PIASTRA-BOARD DERO 2A I 0610016 G

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.2..	....	...4	1...	....	....	..3.	1.	U04
...4	....	....	1...	....	....	..3.	1.	U04
...4	....	....	....	....	....	..3.	1.	U05 U09 U12
...4	....	....	....	....	....	..3.	..	U12
...4	....	....	....	....	....	.2..	..	U15
...4	....	....	....	....	....	1...	..	U15
...4	....	....	...4	....	1...	....	..	U08
...4	....	....	.2..	....	1...	....	..	U08
...4	....	....	....	....	1...	....	..	U11
...4	....	....	....	..3.	....	....	..	U08
.2..	....	...4	....	....	....	....	..	U04
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U08
...4	....	....	....	....	....	....	..	U13
.2..	....	....	....	....	....	....	..	U10

REVISION

COPIE N.
IND. REV.

UNIT K270

COMPIL GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1.1968

CONT. SU FO. 244 FO. 243

PIASTRA-BOARD DERO 2A I 0610016 G

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••	••••	••••	••••	••••	••••	1•••	•2	U15
•••	••••	••••	•••4	••••	••••	••••	•2	U08
•••	••••	••••	•2••	••••	••••	••••	•2	U08
•••	••••	••••	1•••	••••	••••	••••	•2	U04
•••	••••	•••4	••••	••••	••••	••••	•2	U04
•••	1•••	••••	••••	••••	••••	••••	•2	U08
•••	••••	••••	••••	••••	••••	••••	•2	U05 U09 U10
•••	••••	••••	••••	••••	••••	••3•	1•	U04 U12
•2••	••••	••••	••••	••••	••••	•23•	••	U15
•2••	••••	••••	••••	••••	••••	••3•	••	U10
•••	••••	••••	••••	••••	••••	••3•	••	U04 U12
•••	••••	••••	••••	••••	1•••	••••	••	U11
•••	••••	••••	••••	••34	••••	••••	••	U08
•••	••••	••••	••••	•••4	••••	••••	••	U05
•••	••3•	••••	••••	••••	••••	••••	••	U13

REVISION

COPIE A: IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1, 1968

CONT. SU FO. 245 FO. 244

PIASTRA-BOARD DERO 2A I 0610016 G

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U09 U10
....	....	....	....	....	....	....	1.	U04 U07 U12
.2..	....	....	....	....	....	.23.	..	U15
.2..	....	....	....	....	....	1.3.	..	U15
....	....	....	...4	....	....	..3.	..	U08
....	....	....	.2..	....	....	..3.	..	U08
....	....	....	1...	....	....	..3.	..	U04
.2..	....	...4	....	....	....	..3.	..	U04
.2..	1...	....	....	....	....	..3.	..	U08
.2..	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	..3.	..	U04 U05 U09 U12
....	....	....	....	..34	..3.	....	..	U08
....	....	....	....	...4	..3.	....	..	U05
....	....	....	....	....	..3.	....	..	U09 U12
....	....	....	....	....	1...	....	..	U11
....	..3.	....	....	....	....	....	..	U13
...4	....	....	....	....	....	....	..	U13

REVISION

COPIE A: IND. REV.

PIASTRA-BOARD DERO 2A I 0610016 G

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.2..	....	....	....	....	....	123.	.2	U15
....	....	....	....	....	....	1...	.2	U15
....	....	....	....	....	....	....	.2	U09 U10
....	....	....	....	....	....	..3.	1.	U04 U12
....	....	....	....	....	....	..3.	..	U04 U12
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	1...	....	..	U11
....	....	....	....	..34	....	....	..	U08
....	....	....	....	...4	....	....	..	U05
....	....	....	...4	....	....	....	..	U08
....	....	....	.2..	....	....	....	..	U08
....	....	....	1...	....	....	....	..	U04
....	....	...4	....	....	....	....	..	U04
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U08

REVISION

PIASTRA-BOARD DERO 2A 1 0610016 G

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.	.	.	.	.	.	.	.	
....	....	...4	....	....	....	..3.	12	U04
....	....	...4	....	....	....	....	.2	U04
....	....	....	....	....	....	....	.2	U09 U10
....	....	....	....	....	....	.23.	1.	U15
....	....	....	....	....	....	..3.	1.	U04 U07 U12
....	....	....	....	....	....	..3.	..	U04 U12
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	1...	....	..	U11
....	....	....	....	..34	....	....	..	U08
....	....	....	....	...4	....	....	..	U05
....	....	....	...4	....	....	....	..	U08
....	....	....	.2..	....	....	....	..	U08
....	....	....	1...	....	....	....	..	U04
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U08
1...	....	....	....	....	....	....	..	U07

REVISION

COPIE AU TOT.
NO. REV.

PIASTRA-BUARD DERO 2A I 0610016 G

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••	••••	••••	••••	••••	••••	••••	•2	U09
•••	••••	••••	••••	••••	••••	1.3.	1.	U15
•••	••••	•••4	••••	••••	••••	••3.	1.	U04
•••	••••	••••	••••	••••	••••	••3.	1.	U04 U07 U12
•••	••••	••••	••••	••••	••••	••3.	••	U04 U12
•••	••••	••••	••••	••••	••••	•2••	••	U15
•••	••••	••••	••••	••••	1•••	••••	••	U11
•••	••••	••••	••••	••34	••••	••••	••	U08
•••	••••	••••	••••	•••4	••••	••••	••	U05
•••	••••	••••	••••4	••••	••••	••••	••	U08
•••	••••	••••	•2••	••••	••••	••••	••	U08
•••	••••	••••	1•••	••••	••••	••••	••	U04
•••	••••	•••4	••••	••••	••••	••••	••	U04
•••	••3•	••••	••••	••••	••••	••••	••	U13
•••	1•••	••••	••••	••••	••••	••••	••	U08
1•••	••••	••••	••••	••••	••••	••••	••	U07

REVISION

COPIE A:
TO:
IND.
IND.

PIASTRA-GUARD DERO 2A I U610016 G

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	····	····	·2	U09
····	1···	····	····	·.34	····	··3·	1·	U08
····	····	···4	····	····	····	··3·	1·	U04
····	1···	····	····	····	····	··3·	1·	U08
····	····	····	····	····	····	··3·	1·	U04 U07 U12
····	····	····	····	····	····	··3·	··	U04 U12
1···	····	····	····	····	····	·2··	··	U15
1···	····	····	····	····	····	1···	··	U15
····	····	····	····	····	1···	····	··	U11
····	····	····	····	·.34	····	····	··	U08
····	····	····	····	···4	····	····	··	U05
····	····	····	····	·2··	····	····	··	U11
····	····	····	···4	····	····	····	··	U08
····	····	····	·2··	····	····	····	··	U08
····	····	····	1···	····	····	····	··	U04
····	····	···4	····	····	····	····	··	U04
····	··3·	····	····	····	····	····	··	U13
··4·	····	····	····	····	····	····	··	U13
1···	····	····	····	····	····	····	··	U07 U15

PIASTRA-BOARD DERO 2A 1 /610016 G

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..3.	..	U12
...4	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	.3.	....	....	..	U08
....	....	....	...4	....	....	....	..	U08
....	1.3.	....	.2..	....	....	....	..	U08
....	..3.	....	.2..	....	....	....	..	U08
....	....	....	1...	....	....	....	..	U04
....	....	...4	....	....	....	....	..	U04
....	...4	....	....	....	....	....	..	U13
....	..3.	....	....	....	....	....	..	U13 U14
....	1...	....	....	....	....	....	..	U08
...4	....	....	....	....	....	....	..	U13
1...	....	....	....	....	....	....	..	U07

REVISION

COPIE A: IND. REV.

PIASTRA-BUARD DERO 2A I 0610016 G

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...•	....	....	....	....	....	..3.	..	U12
...•	....	....	....	....	....	.2..	..	U15
...4	....	....	....	....	....	1...	..	U15
...•	1...	....	.2..	..3.	1...	....	..	U08
...•	....	....	.2..	....	1...	....	..	U08
...•	....	....	....	....	1...	....	..	U11
...•	....	....	....	..3.	....	....	..	U08
...•	....	....	...4	....	....	....	..	U08
...•	....	....	1...	....	....	....	..	U04
...•	....	...4	....	....	....	....	..	U04
...•	...4	....	....	....	....	....	..	U13
...•	..3.	....	....	....	....	....	..	U13
...•	1...	....	....	....	....	....	..	U08
...4	....	....	....	....	....	....	..	U13
1...	....	....	....	....	....	....	..	U07

COPIE A:
FO.
IND. REV.

REVISION

PIASTRA-BOARD DERO 2A 1 0610016 G

PROVA-TEST = 17

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	1...	....	....	..34	....	....	.2	U08
....	1...	....	....	....	....	....	.2	U08
....	....	....	....	....	....	....	.2	U09 U10
....	....	....	....	....	....	..3.	1.	U04 U12
....	....	....	....	....	....	..3.	..	U04 U12
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	....	1...	..	U15
....	....	....	....	....	1...	....	..	U11
....	....	....	....	..34	....	....	..	U08
....	....	....	....	...4	....	....	..	U05
....	....	....	....	.2..	....	....	..	U11
....	....	....	...4	....	....	....	..	U08
....	....	....	.2..	....	....	....	..	U08
....	....	....	1...	....	....	....	..	U04
....	....	...4	....	....	....	....	..	U04
....	...4	....	....	....	....	....	..	U13
....	..3.	....	....	....	....	....	..	U13
1...	....	....	....	....	....	....	..	U07

REVISION

COPIE A:
TO:
REV.
REV.

PIASTRA-BOARD DERO 2A I 0610016 G

PROVA-TEST = 18

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..3.	..	U12
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	....	1...	..	U15
....	1...	....	...4	..3.	1...	....	..	U08
....	....	....	...4	....	1...	....	..	U08
....	....	....	....	...3	1...	....	..	U11
....	....	....	....	..3.	....	....	..	U08
....	....	....	.2..	....	....	....	..	U08
....	....	....	1...	....	....	....	..	U04
....	....	...4	....	....	....	....	..	U04
....	...4	....	....	....	....	....	..	U13
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U08
1...	....	....	....	....	....	....	..	U07

PIASTRA-BOARD DERO 2A I 0610016 G

PROVA-TEST = 19

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	..3.	..	U12
....	....	....	....	....	....	..3.	..	U05 U09 U12
.2..	....	....	....	....	..3.	.2..	..	U15
.2..	....	....	....	....	..3.	1...	..	U15
....	....	....	....	..34	..3.	....	..	U08
....	....	....	...4	...4	..3.	....	..	U08
....	....	....	.2..	...4	..3.	....	..	U08
....	....	....	1...	...4	..3.	....	..	U04
....	....	....	....	...4	..3.	....	..	U05
.2..	....	...4	....	....	..3.	....	..	U04
.2..	1...	....	....	....	..3.	....	..	U08
.2..	....	....	....	....	..3.	....	..	U10
....	....	....	....	....	..3.	....	..	U04 U09 U12
....	..3.	....	....	....	....	....	..	U13
...4	....	....	....	....	....	....	..	U13

REVISION

COPIE A:
TOT.
IND.
SUP.

PIASTRA-BOARD DERO 2A 1 0610016 G

PROVA-TEST # 20

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..3.	..	U12
1...	....	....	....	....	....	12..	..	U15
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	....	1...	..	U15
....	....	...4	....	....	..3.	....	..	U04
....	....	....	....	....	..3.	....	..	U04 U12
....	....	....	....	..34	....	....	..	U08
....	....	....	...4	...4	....	....	..	U08
....	....	....	.2..	...4	....	....	..	U08
....	....	....	1...	...4	....	....	..	U04
....	....	....	....	...4	....	....	..	U05
....	....	....	....	.2..	....	....	..	U11
....	....	...4	....	....	....	....	..	U04
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U08
1...	....	....	....	....	....	....	..	U07 U15

CORRIGE AI TOT. IND. REV.

REVISION

PIASTRA-BOARD DERO 2A II 0610016 G

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..3.	..	U12
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	....	1...	..	U15
....	....	....	1...	.2.4	..3.	....	..	U04
....	....	....	....	....	1...	....	..	U11
....	....	....	1...	.2.4	....	....	..	U04
....	....	....	....	...4	....	....	..	U05
....	..3.	....	....	..3.	....	....	..	U08
....	....	....	....	.2..	....	....	..	U11
....	....	....	...4	....	....	....	..	U08
....	..3.	....	.2..	....	....	....	..	U08
....	..34	...4	....	....	....	....	..	U04
....	...4	....	....	....	....	....	..	U13
....	..3.	....	....	....	....	....	..	U13 U14
.2..	1...	....	....	....	....	....	..	U08
...4	....	....	....	....	....	....	..	U13
.2..	....	....	....	....	....	....	..	U10

PIASTRA-BOARD DERO 2A II 0610016 G

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•	•	•	•	•	•	3	•	U12
1	•	•	•	•	•	2	•	U15
•	•	•	•	•	•	2	•	U15
•	•	•	•	•	•	1	•	U15
•	34	4	1	2	3	•	•	U04
•	•	•	•	•	1	•	•	U11
•	•	•	1	2	4	•	•	U04
•	•	•	•	4	•	•	•	U05
•	•	•	•	3	•	•	•	U08
•	•	•	•	2	•	•	•	U11
•	•	•	4	•	•	•	•	U08
•	•	•	2	•	•	•	•	U08
•	34	4	•	•	•	•	•	U04
•	4	•	•	•	•	•	•	U13
•	3	•	•	•	•	•	•	U13 U14
•	1	•	•	•	•	•	•	U08
1	•	•	•	•	•	•	•	U07 U15

COPIE A: TOT. REV. REV.

REVISION

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE

SEC.

LOC. PREGNANA (MI)

EMISS. AUG 1,1968

N° 400240000

CONT. SU FO. 258 FO. 257

PIASTRA-BOARD DERO 2A II 0610016 G

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••••	•••••	•••••	•••••	•••••	••3••	••3••	••	U09
•••••	•••••	•••••	•••••	•••••	•••••	••3••	••	U09 U12
•2•••	•••••	•••••	•••••	•••••	•••••	•2•••	••	U15
•2•••	•••••	•••••	•••••	•••••	•••••	1••••	••	U15
•••••	•••••	•••••	1••••	••••4	••3••	•••••	••	U04
•••••	•••••	•••••	•••••	••••4	••3••	•••••	••	U05
•••••	•••••	•••••	•••••	•••••	••3••	•••••	••	U09 U12
•••••	•••••	•••••	•••••	•••••	1••••	•••••	••	U11
•••••	•••••	•••••	•••••	••3••	•••••	•••••	••	U08
•••••	•••••	•••••	••••4	•••••	•••••	•••••	••	U08
•••••	•••••	•••••	•2•••	•••••	•••••	•••••	••	U08
•2•••	•••••	••••4	•••••	•••••	•••••	•••••	••	U04
•••••	••••4	•••••	•••••	•••••	•••••	•••••	••	U13
•••••	••3••	•••••	•••••	•••••	•••••	•••••	••	U13 U14
•2•••	1••••	•••••	•••••	•••••	•••••	•••••	••	U08
••••4	•••••	•••••	•••••	•••••	•••••	•••••	••	U13
•2•••	•••••	•••••	•••••	•••••	•••••	•••••	••	U10

COPIE N°
IND. REV.

REVISION

PIASTRA-BUARD DERU ZA II U810U16 G

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
						3		U12
						2		U15
						1		U15
2	1					3		U08
2						3		U10
						3		U04 U12
					34			U08
			2		24			U08
			1		24			U04
				4		4		U08
					4			U05
					2			U11
		4						U04
	4							U13
	3							U13 U14
4								U13

PIASTRA-BOARD DERO 2A II 0610016 G

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••••	•••••	•••••	1••••	•2•••	•••••	••3••	1•	U04
•••••	•••••	•••••	•••••	•••••	•••••	••3••	••	U12
•••••	•••••	•••••	•••••	•••••	•••••	••2••	••	U15
•••••	•••••	•••••	•••••	•••••	•••••	1••••	••	U15
•••••	•••••	•••••	••••4	•••••	1••••	•••••	••	U08
•••••	•••••	•••••	•2•••	•••••	1••••	•••••	••	U08
•••••	•••••	•••••	•••••	•••••	1••••	•••••	••	U11
•2•••	1•3••	•••••	•••••	••3••	•••••	•••••	••	U08
•••••	••3••	•••••	•••••	••3••	•••••	•••••	••	U08
•••••	•••••	•••••	1••••	•2•••	•••••	•••••	••	U04
•••••	•••••	•••••	•••••	•2•••	•••••	•••••	••	U11
•••••	•••••	••••4	•••••	•••••	•••••	•••••	••	U04
•••••	••••4	•••••	•••••	•••••	•••••	•••••	••	U13
•••••	••3••	•••••	•••••	•••••	•••••	•••••	••	U13 U14
•2•••	1••••	•••••	•••••	•••••	•••••	•••••	••	U08
••••4	•••••	•••••	•••••	•••••	•••••	•••••	••	U13
•2•••	•••••	•••••	•••••	•••••	•••••	•••••	••	U10

PIASTRA-BOARD DERO 2A II 0610016 G

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	1···	·2··	····	··3·	1·	U04
····	····	····	····	····	····	··3·	··	U12
····	····	····	····	····	····	·2··	··	U15
····	····	····	····	····	····	1···	··	U15
····	····	····	···4	····	1···	····	··	U08
····	····	····	·2··	····	1···	····	··	U08
····	····	····	····	····	1···	····	··	U11
·2··	1·3·	····	····	··3·	····	····	··	U06
····	··3·	····	····	·3··	····	····	··	U08
····	····	····	1···	·2··	····	····	··	U04
····	····	····	····	·2··	····	····	··	U11
····	····	···4	····	····	····	····	··	U04
····	···4	····	····	····	····	····	··	U13
····	··3·	····	····	····	····	····	··	U13 U14
·2··	1···	····	····	····	····	····	··	U08
···4	····	····	····	····	····	····	··	U13
·2··	····	····	····	····	····	····	··	U10

COPIE A:
TO:
IND. REV.

REVISION

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD DESA 2A U610017 C

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...	....	....	....	12..	....	...4	12	U12
....	....	....	....	....	....	....	.2	U09 U12
....	....	....	....	....	....	....	1.	U09 U12
....	....	....	....	1...	....	...4	..	U12
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	.2..	....	..	U15
....	....	....	....	.2..	....	....	..	U09 U12
....	....	....	....	1...	....	....	..	U09
....	....	....	...4	....	....	....	..	U14
....	....	....	.23.	....	....	....	..	U11
....	....	....	1.3.	....	....	....	..	U14
....	....	....	.3..	....	....	....	..	U14
....	....	...4	1...	....	....	....	..	U11
....	....	....	1...	....	....	....	..	U14
....	....	..3.	....	....	....	....	..	U14
....	...4	....	....	....	....	....	..	U10 U13
....	12..	....	....	....	....	....	..	U11
...4	.2..	....	....	....	....	....	..	U13
....	.2..	....	....	....	....	....	..	U13
..34	....	....	....	....	....	....	..	U10
...4	....	....	....	....	....	....	..	U13

REVISION

COPIE N° IND. REV.

PIASTRA-BOARD DESA 2A U610017 C

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	...4	12..	....	...4	12	U12
....	....	....	....	....	....	....	.2	U09 U12
....	....	....	....	....	....	....	1.	U09 U12
....	....	....	....	1...	....	...4	..	U12
....	....	....	....	....	.2.4	.23.	..	U15
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	.2..	....	..	U15
....	....	....	...4	.2..	....	....	..	U09 U12
....	....	....	....	1...	....	....	..	U09
....	....	..3.	1.34	....	....	....	..	U14
....	....	....	...4	....	....	....	..	U14
....	....	....	.23.	....	....	....	..	U11
....	....	....	..3.	....	....	....	..	U14
....	....	...4	1...	....	....	....	..	U11
....	....	....	1...	....	....	....	..	U14
....	....	..3.	....	....	....	....	..	U14
....	...4	....	....	....	....	....	..	U10 U13
....	12..	....	....	....	....	....	..	U11
...4	.2..	....	....	....	....	....	..	U13
....	.2..	....	....	....	....	....	..	U13
.34	....	....	....	....	....	....	..	U10
...4	....	....	....	....	....	....	..	U13

COPIE A: FO. IND. REV.

REVISION

PIASTRA-BOARD DESA 2A 0610017 C

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	...4	1234	12..	....	....	12	U09
....	....	....	....	....	....	....	.2	U09 U12
....	....	....	....	....	....	....	1.	U09 U12
....	....	...4	1...	1...	....	...4	..	U12
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	.2..	....	..	U15
....	....	....	.234	.2..	....	....	..	U09 U12
....	....	...4	1...	1...	....	....	..	U09
....	....	....	...4	....	....	....	..	U14
....	....	....	.23.	....	....	....	..	U11
....	....	....	1.3.	....	....	....	..	U14
....	....	....	..3.	....	....	....	..	U14
....	....	...4	1...	....	....	....	..	U11
....	....	....	1...	....	....	....	..	U14
....	....	..3.	....	....	....	....	..	U14
....	...4	....	....	....	....	....	..	U10 U13
....	12..	....	....	....	....	....	..	U11
...4	.2..	....	....	....	....	....	..	U13
....	.2..	....	....	....	....	....	..	U13
..34	....	....	....	....	....	....	..	U10
...4	....	....	....	....	....	....	..	U13

COPIE A.C. IND. REV.

REVISION

PIASTRA-BOARD DESA 2A 0610017 C

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	...4	123.	12..	....	...4	12	U12
....	....	....	....	....	....	....	.2	U09 U12
....	....	....	....	....	....	....	1.	U09 U12
....	....	...4	1...	1...	....	...4	..	U12
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	.2..	....	..	U15
....	....	....	.23.	.2..	....	....	..	U09 U12
....	....	...4	1...	1...	....	....	..	U09
....	....	....	...4	....	....	....	..	U14
....	12..	...4	123.	....	....	....	..	U11
....	....	....	.23.	....	....	....	..	U11
....	....	....	..3.	....	....	....	..	U14
....	....	...4	1...	....	....	....	..	U11
....	....	....	1...	....	....	....	..	U14
....	....	..3.	....	....	....	....	..	U14
..34	...4	....	....	....	....	....	..	U10
....	...4	....	....	....	....	....	..	U10 U13
....	12..	....	....	....	....	....	..	U11
....	.2..	....	....	....	....	....	..	U13
..34	....	....	....	....	....	....	..	U10
...4	....	....	....	....	....	....	..	U13

REVISION

PIASTRA-BOARD DESA 2A 0610017 C

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	12..	....	....	12	U09
....	....	....	....	....	....	....	.2	U09 U12
....	....	....	....	....	....	....	1.	U09 U12
....	....	....	....	1...	....	..4	..	U12
....	....	....	....	....	....	..3.	..	U15
....	....	....	....	....	....	.2..	..	U15
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	.2..	....	..	U15
....	....	....	....	.2..	....	....	..	U09 U12
....	....	....	....	1...	....	....	..	U09
....	....	....	1.3.	....	....	....	..	U14
....	....	....	..3.	....	....	....	..	U14
....	....	....	1...	....	....	....	..	U14
....	....	..3.	....	....	....	....	..	U14
....	...4	....	....	....	....	....	..	U13
....	12..	....	....	....	....	....	..	U11
....	.2..	....	....	....	....	....	..	U13
..34	....	....	....	....	....	....	..	U10
...4	....	....	....	....	....	....	..	U13

REVISION

COPIE AI FO. / INST. REV.

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD DESA 2B 0610018 Z

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	1∘∘∘	∘∘3∘	∘∘∘∘	∘2	U11
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘∘∘	∘2	U11 U12
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2	U12
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘4	∘∘∘4	∘∘	U15
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘	U15
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘∘∘	∘∘	U15
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘∘∘	∘∘	U12
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘∘	∘∘∘∘	∘∘	U15
1∘∘∘	1∘∘∘	∘∘3∘	∘∘∘∘	∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘	U10
1∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘	U10
∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘∘∘	123∘	∘∘∘∘	∘∘∘∘	∘∘	U12
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘∘∘	∘∘∘∘	∘∘	U13
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘∘	∘∘∘∘	∘∘∘∘	∘∘	U14
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U11
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U11
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U14
∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U10
∘∘∘∘	∘∘∘4	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U13
∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U10
∘23∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U07
∘∘3∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U07
12∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U07
1∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U07

REVISION

PIASTRA-BOARD DESA 28 0610018 Z

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	....	.2	U11 U12
....	....	....	....	....	....	....	.2	U12
....	....	....	....	....	....	...4	..	U15
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	..3.	....	..	U12
....	....	....	....	....	.2..	....	..	U15
1...	....	....	....	....	1...	....	..	U10
....	....	....	....	..3.	....	....	..	U13
....	....	....	....	.2..	....	....	..	U14
....	....	....	....	1...	....	....	..	U11
....	....	....	...4	....	....	....	..	U11
....	....	..3.	....	....	....	....	..	U10
....	1...	....	....	....	....	....	..	U10
.23.	....	....	....	....	....	....	..	U07
..3.	....	....	....	....	....	....	..	U07
1...	....	....	....	....	....	....	..	U07

COPIE A:
INCL.
TO:

REVISION

PIASTRA-BUARD DESA 28 0610018 2

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE – FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	....	..2	U11 U12
....	....	....	....	....	....	....	..2	U12
....	....	....	....	....	....	...4	..	U15
....	....	....	....	....	..4.	....	..	U15
....	....	....	....	....	..3.	....	..	U12
....	....	....	....	....	.2..	....	..	U15
1...	....	....	....	....	1...	....	..	U10
....	1...	....	....	123.	....	....	..	U12
....	....	....	....	..3.	....	....	..	U13
....	....	....	....	.2..	....	....	..	U14
....	....	....	....	1...	....	....	..	U11
....	....	....	...4	....	....	....	..	U11
....	....	....	..3.	....	....	....	..	U14
....	....	..3.	....	....	....	....	..	U10
....	...4	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U10
.23.	....	....	....	....	....	....	..	U07
..3.	....	....	....	....	....	....	..	U07
1...	....	....	....	....	....	....	..	U07

REVISION

COPIE TO:
IND. REV.

PIASTRA-BOARD DESA 2B 0610018 Z

PROVA-TEST # 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	....	.2	U11 U12
....	....	....	....	....	....	....	.2	U12
....	....	....	....	....	....	...4	..	U15
....	....	....	....	....	...4	....	..	U15
....	....	....	....	....	..3.	....	..	U12
....	....	....	....	....	.2..	....	..	U15
1...	....	....	....	....	1...	....	..	U10
....	....	....	....	..3.	....	....	..	U13
....	....	....	....	.2..	....	....	..	U14
....	....	....	....	1...	....	....	..	U11
....	....	....	...4	....	....	....	..	U11
....	....	..3.	....	....	....	....	..	U10
....	1...	....	....	....	....	....	..	U10
.23.	....	....	....	....	....	....	..	U07
..3.	....	....	....	....	....	....	..	U07
12..	....	....	....	....	....	....	..	U07
1...	....	....	....	....	....	....	..	U07

REVISION

COPIE A:
IND.
REV.

PIASTRA-BOARD DESA 28 0610018 Z

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	····	····	·2	U12
····	····	····	····	····	····	···4	··	U15
····	····	····	····	····	···4	····	··	U15
····	····	····	····	····	·3··	····	··	U12
····	····	····	····	····	2···	····	··	U15
1···	····	····	····	····	1···	····	··	U10
····	····	····	····	·3··	····	····	··	U13
····	····	····	····	2···	····	····	··	U14
····	····	····	····	1···	····	····	··	U11 U12
····	····	····	···4	····	····	····	··	U11
····	····	·3··	····	····	····	····	··	U10
····	···4	····	····	····	····	····	··	U13
····	1···	····	····	····	····	····	··	U10
·23·	····	····	····	····	····	····	··	U07
··3·	····	····	····	····	····	····	··	U07
1···	····	····	····	····	····	····	··	U07

PIASTRA-GUARD DESA 2B 0610018 Z

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••0•	••••	••••	••3•	••••	••••	••••	••	U14
••••	•••4	••••	••••	••••	••••	••••	••	U13
••3•	••••	••••	••••	••••	••••	••••	••	U07
1•••	••••	••••	••••	••••	••••	••••	••	U07

REVISION

COPIE AL TO:
IND. REV.

UNIT K270

COMPIL. GE 425
APPR.
SEZ. SEC. SPS - OGE
LOC. PREGNANA (MI)
Nº 400240000
EMISS. AUG 1, 1968
CONT. SU FO. 282 FO. 281

PIASTRA=BOARD DESA 28 0610016 Z

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...:	....	....	..3.	....	....	....	..	U14
....	...4	....	....	....	....	....	..	U13
..3.	....	....	....	....	....	....	..	U07
1...	....	....	....	....	....	....	..	U07

PIASTRA-BOARD DESA 28 0610018 Z

PROVA-TEST # 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	1...	....	..	U10
....	....	....	....	1...	....	....	..	U11 U12
....	....	....	.3..	....	....	....	..	U14
....	...4	....	....	....	....	....	..	U13
..3.	....	....	....	....	....	....	..	U07
1...	....	....	....	....	....	....	..	U07

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD DESA 2C 0610019 V

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..3.	..34	....	....	1.	U14
....	....	....	....	..34	....	....	1.	U09 U14
....	....	....	....	....	....	....	1.	U09
....	....	..3.	....	....	...4	.234	..	U11
....	....	....	....	....	....	..34	..	U11 U12
....	....	....	....	....	...4	.23.	..	U12
....	....	....	....	....	....	..3.	..	U12
....	....	....	....	....	...4	.2..	..	U09 U11
....	....	....	....	....	....	.2..	..	U12
....	....	....	....	....	...4	....	..	U12
1..4	...4	1...	..3.	....	.2..	....	..	U07 U10
1...	....	....	..3.	....	.2..	....	..	U09 U10
....	....	....	....	....	.2..	....	..	U10
....	....	....	....	..34	1...	....	..	U08
....	....	....	....	....	1...	....	..	U08
....	....	....	....	...4	....	....	..	U08
....	....	....	....	..3.	....	....	..	U08
....	....	....	..3.	....	....	....	..	U14
....	....	..3.	....	....	....	....	..	U11
1...	....	12..	....	....	....	....	..	U07
....	....	.2..	....	....	....	....	..	U07
....	....	1...	....	....	....	....	..	U07
...4	...4	....	....	....	....	....	..	U13
....	...4	....	....	....	....	....	..	U13
...4	....	....	....	....	....	....	..	U13
1...	....	....	....	....	....	....	..	U07

REVISION

COPIE IN
IND.
REV.

PIASTRA-BOARD DESA 2C 0610019 V

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	.2..	1.	U09
....	....	....	....	....	....	....	1.	U09 U14
....	....	....	....	....	....	..34	..	U11 U12
....	....	....	....	....	....	...4	..	U12
....	....	....	....	....	....	..3.	..	U12
....	....	....	....	....	...4	.2..	..	U09 U11
....	....	....	....	....	....	.2..	..	U12
....	....	....	....	....	...4	....	..	U12
....	....	....	....	....	.2..	....	..	U10
....	....	....	....	....	1...	....	..	U08
....	....	....	....	...4	....	....	..	U08
....	....	....	....	..3.	....	....	..	U08
....	....	....	...3.	....	....	....	..	U14
....	....	12..	....	....	....	....	..	U07
....	....	.2..	....	....	....	....	..	U07
....	....	1...	....	....	....	....	..	U07 U10
....	...4	....	....	....	....	....	..	U13
...4	....	....	....	....	....	....	..	U13
1...	....	....	....	....	....	....	..	U07

PIASTRA-BUARD DESA 2C 0610019 V

PROVA-TEST # 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U09
....	....	.3..	....	....	....	.34	..	U11
....	....	....	....	....	....	.34	..	U11 U12
....	....	....	....	....	....	.3.	..	U12
1...	....	....	..3.	....	.24	.2..	..	U09
....	....	....	....	....	..4	.2..	..	U09 U11
....	....	....	....	....	....	.2..	..	U12
....	....	....	....	....	....	.2..	..	U12
....	....	....	...4	....	...4	....	..	U09 U10
1...	....	....	..3.	....	.2..	....	..	U10
....	....	....	....	....	.2..	....	..	U08
....	....	....	....	....	1...	....	..	U08
....	....	....	....	...4	....	....	..	U08
....	....	....	...3	....	....	....	..	U14
....	....	....	....	....	....	....	..	U11
....	....	.3..	....	....	....	....	..	U07
....	....	.2..	....	....	....	....	..	U07
....	....	1...	....	....	....	....	..	U13
....	...4	....	....	....	....	....	..	U13
...4	....	....	....	....	....	....	..	U07
1...	....	....	....	....	....	....	..	

COPIE A FO.
IND. REV.

REVISION

PIASTRA-BOARD DESA 2C 0610019 V

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	..34	....	....	1.	U09 U14
....	....	....	....	....	....	....	1.	U09
....	....	....	....	....	....	..34	..	U11 U12
....	....	....	....	....	....	...4	..	U12
....	....	....	....	...3	....	...3.	..	U12
1...	....	....	....	..34	.2.4	.2..	..	U09
....	....	....	....	....	...4	.2..	..	U09 U11
....	....	....	....	....	....	.2..	..	U12
....	....	....	....	....	...4	....	..	U12
1...	....	....	....	....	.2..	....	..	U09 U10
....	....	....	....	....	.2..	....	..	U10
....	....	....	....	....	1...	....	..	U08
....	....	....	....	...4	....	....	..	U08
....	....	....	....	...3	....	....	..	U08
....	....	.3..	....	....	....	....	..	U11
....	....	12..	....	....	....	....	..	U07
....	....	.2..	....	....	....	....	..	U07
....	....	1...	....	....	....	....	..	U07 U10
....	...4	....	....	....	....	....	..	U13
...4	....	....	....	....	....	....	..	U13
1...	....	....	....	....	....	....	..	U07

REVISION

COPIE AC. CO.
IND. REV.

PIASTRA-BOARD DESA 20 0610019 V

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	..34	....	....	1.	U09 U14
....	....	....	....	....	....	....	1.	U09
....	....	....	....	....	....	..34	..	U11 U12
....	....	....	....	....	....	...4	..	U12
....	....	....	....	....	....	..3.	..	U12
1...	....	....	....	..34	...4	.2..	..	U09
....	....	....	....	....	...4	.2..	..	U09 U11
....	....	....	....	....	....	.2..	..	U12
....	....	....	....	....	...4	....	..	U12
....	....	....	....	....	1...	....	..	U08
....	....	....	....	...4	....	....	..	U08
....	....	....	....	..3.	....	....	..	U08
....	....	.3..	....	....	....	....	..	U11
....	....	.2..	....	....	....	....	..	U07
1..4	...4	1...	....	....	....	....	..	U07 U10
....	....	1...	....	....	....	....	..	U07
...4	...4	....	....	....	....	....	..	U07
....	...4	....	....	....	....	....	..	U13
...4	....	....	....	....	....	....	..	U13
1...	....	....	....	....	....	....	..	U07 U09 U10

PIASTRA-BOARD DESA 2C 0610019 V

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
					4	234		U11
						34		U11 U12
					4	23		U12
						3		U12
					4	2		U09 U11
						2		U12
					4			U12
				1				U08
1				34				U09
				34				U09 U14
				4				U08
				3				U08
		3						U11
1	4							U07 U10
	4							U07
	4							U13
	4							U13
1								U07 U09 U10

PIASTRA-BOARD DESA 20 [illegible] V

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U11 U12
....	....	....	....	....	....	..3.	..	U12
....	....	....	....	....	....	.2..	..	U12
....	....	....	....	....	...4	....	..	U12
....	....	....	....	....	1...	....	..	U08
....	....	....	....	...4	....	....	..	U08 U09 U14
....	....	..3.	....	....	....	....	..	U11
....	...4	....	....	....	....	....	..	U07 U10 U13

COPIE A:
IND.
REV.

REVISIONI

PIASTRA-BOARD DESA 2C 0610019 V

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
						34		U11 U12
						4		U12
						3		U12
				4		2		U09
						2		U09 U12
					2			U10
				4				U08 U09 U14
			3					U14
		1						U07
	4							U13
1								U07

REVISION

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD DEVA 2A 0610020 1

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	....	...4	....	....	..	U01
....	....	....	....	..3.	....	....	..	U01 U05
....	....	....	....	12..	....	....	..	U03
....	....	....	....	.2..	....	....	..	U03 U05
....	....	....	....	1...	....	....	..	U03 U05 U07

REVISION

COPIE A:
TO:
VOID:
REV.

PIASTRA-BOARD DEVA 2A 0610020 T

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUAST - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	....	...4	....	....	..	U01
....	....	....	....	123.	....	....	..	U05
....	....	....	....	.23.	....	....	..	U01 U05
....	....	....	....	.2..	....	....	..	U03 U05
....	....	....	....	1...	....	....	..	U03 U05 U07

REVISION

COPIE A: LOI
RIFERIMENTO REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

CONT. SU FO. 298 FO. 297

PIASTRA-BOARD DEVA 2A 0610020 1

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	....	...4	....	....	..	U01
....	....	....	....	123.	....	....	..	U05
....	....	....	....	..3.	....	....	..	U01 U05
....	....	....	....	.2..	....	....	..	U03 U05
....	....	....	....	1...	....	....	..	U03 U05 U07

REVISION

PIASTRA-BOARD DEVA 2A 0610020 T

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	....	...4	....	....	..	U01
....	....	....	....	123.	....	....	..	U05
....	....	....	....	..3.	....	....	..	U05
....	....	....	....	.2..	....	....	..	U03 U05
....	....	....	....	1...	....	....	..	U03 U05 U07

PIASTRA-BOARD DEVA 2A 0610020 1

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	....	...4	....	....	..	U01
....	....	....	....	123.	....	....	..	U05
....	....	....	....	..3.	....	....	..	U05
....	....	....	....	.2..	....	....	..	U03 U05
....	....	....	....	1...	....	....	..	U03 U05 U07

PIASTRA-BOARD DEVA 2A 0610020 1

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	....	...4	....	....	..	U01
....	....	....	....	123.	....	....	..	U05
....	....	....	....	..3.	....	....	..	U05
....	....	....	....	.2..	....	....	..	U05
....	....	....	....	1...	....	....	..	U03 U05 U07

PIASTRA-BOARD DEVA 2A 0610020 T

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	....	...4	....	....	..	U01
....	....	....	....	123.	....	....	..	U05
....	....	....	....	.3.	....	....	..	U05
....	....	....	....	2..	....	....	..	U05
....	....	....	....	1...	....	....	..	U03 U05 U07

COPIE N.
IND. REV.

REVISION

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

CONT. SU FO. 304 FO. 303

PIASTRA-BOARD DEVA 2A 0610020 T

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	....	...4	....	....	..	U01
....	....	....	....	123.	....	....	..	U05
....	....	....	....	..3.	....	....	..	U05
....	....	....	....	.2..	....	....	..	U05
....	....	....	....	1...	....	....	..	U03 U05 U07

REVISION

COPIE AI FO.
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 40024000

EMISS. AUG 1,1968

PIASTRA-BOARD DEVA 2A 0610020 T

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	....	...4	....	....	..	U01
....	....	....	....	123.	....	....	..	U05
....	....	....	....	..3.	....	....	..	U05
....	....	....	....	.2..	....	....	..	U05
....	....	....	....	1...	....	....	..	U03 U05 U07

PIASTRA-BOARD DEVA 2A 0610020 1

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	•••4	••••	••••	••	U01
••••	••••	••••	••••	123•	••••	••••	••	U05
••••	••••	••••	••••	••3•	••••	••••	••	U05
••••	••••	••••	••••	•2••	••••	••••	••	U05
••••	••••	••••	••••	1•••	••••	••••	••	U03 U05

COPIE A:
IND. REV.

REVISION

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1, 1968

CONT. SU FO. 311 FO. 305

PIASTRA-BOARD ESCO 2A 0610021 U

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••••	•••••	•••••	•••••	•••••	•••••	1..4	••	U07 U08
•••••	•••••	•••••	•••••	•••••	•••••	...4	••	U03 U06 U08 V01
•••••	•••••	•••••	•••••	•••••	•••••	1...	••	U05 U06 U08 V08
•••••	•••••	•••••	•••••	•••••	•2•••	•••••	••	U07
•••••	•••••	•••••	•••••	••••4	•••••	•••••	••	U07

PIASTRA-BOARD ESCO 2A 0610021 U

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.2..	1..4	..	U07
....	....	....	....	....	....	1..4	..	U06 U07
....	....	....	....	....	.2..	...4	..	U07
....	....	....	....	....	....	...4	..	U01 U03 U06 U08 V02 V03 V06
....	....	....	....	....	....	1...	..	U05 U06 U08 V09 V11
....	....	....	....	...4	....	....	..	U07

REVISION

PIASTRA-BUARD ESCO 2A 0610021 0

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••••	•••••	•••••	•••••	•••••	•••••	1••4	••	U07 U08
•••••	•••••	•••••	•••••	•••••	••••	•••4	••	U03 U06 U08 V02
•••••	•••••	•••••	•••••	•••••	•••••	1•••	••	U05 U06 U08 V09
•••••	•••••	•••••	•••••	•••••	•2••	••••	••	U07

PIASTRA-BOARD ESCO 2A 0610021 0

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	1..4	..	U06 U07
....	....	....	....	....	....	...4	..	U01 U03 U06 U08 V01 V04 V05 V07
....	....	....	....	....	....	1...	..	U05 U06 U08 V08 V10
....	....	....	....	....	.2..	....	..	U07
....	....	....	....	...4	....	....	..	U07

REVISION

COPIE A:
IND.
REV.

PIASTRA-BOARD ESCO 2A 0610021 0

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	····	1···4	··	U08
····	····	····	····	····	·2··	···4	··	U07
····	····	····	····	····	····	···4	··	U01 U06 U08 V04
····	····	····	····	····	····	1···	··	U05 U06 U07 U08 V10

PIASTRA-BOARD ESCO 2A 0610021 U

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	••••	1..4	••	U08
••••	••••	••••	••••	••••	••••	...4	••	U01 U06 U08 V03
••••	••••	••••	••••	••••	••••	1...	••	U05 U06 U07 U08 V11
••••	••••	••••	••••	••••	•2••	••••	••	U07

REVISION

PIASTRA-BOARD ESCO 2A 0610021 0

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U03 U06 U07 U08 V05
....	....	....	....	....	.2..	....	..	U07

REVISIONI

COPIE AL N.
IND. REV.

UNIT K270

COMPIL. GE 425
EMISS. AUG 1,1968

APPR. dl

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

PIASTRA-BOARD ESCO 2A 0610021 U

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U03 U06 U07 U08 V06
....	....	....	....	....	.2..	....	..	U07

PIASTRA-BOARD ESCO ZA 0610021 U

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.2..	...4	..	U07
....	....	....	....	....	....	...4	..	U01 U06 U08 V07

REVISION

CODE A:
IND. REV.

UNIT K270

COMPIL GE 425

APPR.

EMISS. AUG 1.1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 320 FO. 319

PIASTRA-BOARD ESCO 2A 0610021 U

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	••••	1..4	••	U08
••••	••••	••••	••••	••••	••••	...4	••	U01 U06 U08
••••	••••	••••	••••	••••	••••	1...	••	U06 U08
••••	••••	••••	••••	••••	.2..	••••	••	U07

REVISION

COPIE A: TO. INV. REV.

PIASTRA-BOARD ESCO 2A 0610021 U

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	O	D	E	F	G	H	
••••	••••	••••	••••	••••	••••	...4	••	U08
••••	••••	••••	••••	••••	••••	1•••	••	U08
••••	••••	••••	••••	••••	-2••	••••	••	U07

REVISION

COPIE AI:
IND. TO:
REV.

COMPIL. GE 425	APPR.	UNIT K276	
EMISS. AUG 1,1968		SEZ. SPS - OGE SEC. LOC. PREGNANA (MI)	N° 400240000

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD FIFA 2A 0610022 G

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	..3.	.2	U14 U15
....	....	....	....	....	....	....	.2	U10 U15
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	...4	..	U24 U25
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U23 U24
....	....	....	....	....	....	1...	..	U22
....	....	....	....	....	1.4	....	..	U08 U13
....	....	....	....	....	...4	....	..	U08 U09
....	....	....	....	...4	..3.	....	..	U17 U21
....	....	....	....	....	..3.	....	..	U21 U22
....	....	....	....	....	1...	....	..	U09
....	....	....	....	..4	....	....	..	U22
....	....	....	....	12..	....	....	..	U11 U16
....	....	....	....	.2..	....	....	..	U06
....	....	....	..3.	1...	....	....	..	U06
....	....	....	....	1...	....	....	..	U06 U16
....	....	....	..34	....	....	....	..	U07 U12
....	....	....	...4	....	....	....	..	U06
....	....	....	..3.	....	....	....	..	U06 U07
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

PIASTRA-BOARD FIFA 2A 0610022 G

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	..3.	.2	U14 U15
....	....	....	....	....	....	....	.2	U10
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	...4	..	U24
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	....	1...	..	U22
....	....	....	....	....	1..4	....	..	U08 U13
....	....	....	....	....	...4	....	..	U09
....	....	....	....	...4	..3.	....	..	U17 U21
....	....	....	....	....	..3.	....	..	U22
....	....	....	....	....	1...	....	..	U09
....	....	....	....	...4	....	....	..	U22
....	....	....	....	12..	....	....	..	U11 U16
....	....	....	....	.2..	....	....	..	U06
....	....	....	..3.	1...	....	....	..	U06
....	....	....	....	1...	....	....	..	U06
....	....	....	..34	....	....	....	..	U07 U12
....	....	....	...4	....	....	....	..	U06
....	....	....	..3.	....	....	....	..	U06
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

REVISION

PIASTRA-BOARD FIFA 2A 0610022 G

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	..3.	.2	U14 U15
....	....	....	....	....	....	....	.2	U10
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	...4	..	U24
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	....	1...	..	U22
....	....	....	....	....	1.4	....	..	U08 U13
....	....	....	....	....	...4	....	..	U09
....	....	....	....	...4	..3.	....	..	U17 U21
....	....	....	....	....	..3.	....	..	U22
....	....	....	....	....	1...	....	..	U09
....	....	....	....	...4	....	....	..	U22
....	....	....	....	12..	....	....	..	U11 U16
....	....	....	....	.2..	....	....	..	U06
....	....	....	..3.	1...	....	....	..	U06
....	....	....	....	1...	....	....	..	U06
....	....	....	..34	....	....	....	..	U07 U12
....	....	....	...4	....	....	....	..	U06
....	....	....	..3.	....	....	....	..	U06
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

REVISION

PIASTRA-GUARD FIFA 2A 0610022 0

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	..3.	.2	U14 U15
....	....	....	....	....	....	....	.2	U10
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	...4	..	U24
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	....	1...	..	U22
....	....	....	....	....	1..4	....	..	U08 U13
....	....	....	....	....	...4	....	..	U09
....	....	....	....	...4	..3.	....	..	U17 U21
....	....	....	....	....	..3.	....	..	U22
....	....	....	....	....	1...	....	..	U09
....	....	....	....	...4	....	....	..	U22
....	....	....	....	12..	....	....	..	U11 U16
....	....	....	....	.2..	....	....	..	U06
....	....	....	..3.	1...	....	....	..	U06
....	....	....	....	1...	....	....	..	U06
....	....	....	..34	....	....	....	..	U07 U12
....	....	....	...4	....	....	....	..	U06
....	....	....	..3.	....	....	....	..	U06
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

REVISION

COPIE A:
IND. REV.

PIASTRA-BOARD FIFA 2A 0610022 G

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	..3.	.2	U14 U15
....	....	....	....	....	....	....	.2	U10 U15
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	...4	..	U24 U25
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U23 U24
....	....	....	....	...4	....	1...	..	U22
....	....	....	....	....	....	1...	..	U22
....	....	....	....	....	1..4	....	..	U08 U13
....	....	....	....	....	...4	....	..	U08 U09
....	....	....	....	...4	..3.	....	..	U17 U21
....	....	....	....	....	..3.	....	..	U21 U22
....	....	....	....	....	1...	....	..	U09
....	....	....	....	...4	....	....	..	U22
....	....	....	....	12..	....	....	..	U11 U16
....	....	....	...4	.2..	....	....	..	U06
....	....	....	....	.2..	....	....	..	U06
....	....	....	....	1...	....	....	..	U06 U16
....	....	....	..34	....	....	....	..	U07 U12
....	....	....	...4	....	....	....	..	U06
....	....	....	..3.	....	....	....	..	U06 U07
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

REVISION

PIASTRA-BOARD FIFA 2A 0610022 G

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	..3.	.2	U14 U15
....	....	....	....	....	....	....	.2	U18 U15
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	...4	..	U24 U25
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U23 U24
....	....	....	....	...4	....	1...	..	U22
....	....	....	....	....	....	1...	..	U22
....	....	....	....	....	1..4	....	..	U08 U13
....	....	....	....	....	...4	....	..	U08 U09
....	....	....	....	...4	..3.	....	..	U17 U21
....	....	....	....	....	..3.	....	..	U21 U22
....	....	....	....	....	1...	....	..	U09
....	....	....	....	...4	....	....	..	U22
....	....	....	....	12...	....	....	..	U11 U16
....	....	....	...4	.2..	....	....	..	U06
....	....	....	....	.2..	....	....	..	U06
....	....	....	....	1...	....	....	..	U06 U16
....	....	....	..34	....	....	....	..	U07 U12
....	....	....	...4	....	....	....	..	U06
....	....	....	..3.	....	....	....	..	U06 U07
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

REVISION

PIASTRA-BOARD FIFA 2A 0610022 G

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	..3.	.2	U14 U15
....	....	....	....	....	....	....	.2	U10 U15
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	...4	..	U24 U25
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U23 U24
....	....	....	....	....	1...	....	..	U22
....	....	....	....	....	....	1...	..	U22
....	....	....	....	....	1..4	....	..	U08 U13
....	....	....	....	....	...4	....	..	U08 U09
....	....	....	....	....	..3.	....	..	U17 U21
....	....	....	....	....	..3.	....	..	U21 U22
....	....	....	....	....	1...	....	..	U09
....	....	....	....	...4	....	....	..	U22
....	....	....	....	12..	....	....	..	U11 U16
....	....	....	...4	.2..	....	....	..	U06
....	....	....	....	.2..	....	....	..	U06
....	....	....	....	1...	....	....	..	U06 U16
....	....	....	..34	....	....	....	..	U07 U12
....	....	....	...4	....	....	....	..	U06
....	....	....	..3.	....	....	....	..	U06 U07
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

REVISION

COPIE N.
IND. REV.

PIASTRA-BOARD FIFA 2A 0610022 G

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	..3.	.2	U14 U15
....	....	....	....	....	....	....	.2	U10
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	...4	..	U24
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	...4	....	1...	..	U22
....	....	....	....	....	....	1...	..	U22
....	....	....	....	....	1..4	....	..	U08 U13
....	....	....	....	....	...4	....	..	U09
....	....	....	....	...4	..3.	....	..	U17 U21
....	....	....	....	....	..3.	....	..	U22
....	....	....	....	....	1...	....	..	U09
....	....	....	....	...4	....	....	..	U22
....	....	....	....	12..	....	....	..	U11 U16
....	....	....	...4	.2..	....	....	..	U06
....	....	....	....	.2..	....	....	..	U06
....	....	....	....	1...	....	....	..	U06
....	....	....	..34	....	....	....	..	U07 U12
....	....	....	...4	....	....	....	..	U06
....	....	....	..3.	....	....	....	..	U06
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

REVISION

COPIE A: IND. TO: REV.

PIASTRA-BOARD FIFA 2A 0610022 G

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	..3.	.2	U14 U15
....	....	....	....	....	....	....	.2	U10
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	...4	..	U24
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	...4	....	1...	..	U22
....	....	....	....	....	....	1...	..	U22
....	....	....	....	....	1..4	....	..	U08 U13
....	....	....	....	....	...4	....	..	U09
....	....	....	....	...4	..3.	....	..	U17 U21
....	....	....	....	....	..3.	....	..	U22
....	....	....	....	....	1...	....	..	U09
....	....	....	....	..4	....	....	..	U22
....	....	....	....	12..	....	....	..	U11 U16
....	....	....	...4	.2..	....	....	..	U06
....	....	....	....	.2..	....	....	..	U06
....	....	....	....	1...	....	....	..	U06
....	....	....	..34	....	....	....	..	U07 U12
....	....	....	...4	....	....	....	..	U06
....	....	....	..3.	....	....	....	..	U06
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

REVISION

COPIE A: FO. IND. REV.

PIASTRA-BOARD FIFA 2A 0610022 B

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	..3.	.2	U14 U15
....	....	....	....	....	....	....	.2	U10 U15
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	...4	..	U24 U25
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U23 U24
....	....	....	....	....	....	1...	..	U22
....	....	....	....	....	1..4	....	..	U08 U13
....	....	....	....	....	...4	....	..	U08 U09
....	....	....	....	...4	..3.	....	..	U17 U21
....	....	....	....	....	.3..	....	..	U21 U22
....	....	....	....	....	1...	....	..	U09
....	....	....	....	...4	....	....	..	U22
....	....	....	....	12..	....	....	..	U11 U16
....	....	....	....	.2..	....	....	..	U06
....	....	....	..3.	1...	....	....	..	U06
....	....	....	....	1...	....	....	..	U06 U16
....	....	....	..34	....	....	....	..	U07 U12
....	....	....	...4	....	....	....	..	U06
....	....	....	..3.	....	....	....	..	U06 U07
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

REVISION

COPIE AL TO
IND. REV.

PIASTRA-BOARD FIFA 2A 0610022 0

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	..3.	.2	U14 U15
....	....	....	....	....	....	....	.2	U10
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	...4	..	U24
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	....	1...	..	U22
....	....	....	....	....	1..4	....	..	U08 U13
....	....	....	....	....	...4	....	..	U09
....	....	....	....	...4	..3.	....	..	U17 U21
....	....	....	....	....	..3.	....	..	U22
....	....	....	....	....	1...	....	..	U09
....	....	....	....	...4	....	....	..	U22
....	....	....	....	12..	....	....	..	U11 U16
....	....	....	....	.2..	....	....	..	U06
....	....	....	..3.	1...	....	....	..	U06
....	....	....	....	1...	....	....	..	U06
....	....	....	..34	....	....	....	..	U07 U12
....	....	....	...4	....	....	....	..	U06
....	....	....	..3.	....	....	....	..	U06
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

REVISION

COPIE A: NO. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

EMISS. AUG 1.1968

Nº 400240000

PIASTRA-BOARD FIFA 2A 0610022 0

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	..3.	.2	U14 U15
....	....	....	....	....	....	....	.2	U10
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	...4	..	U24
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	....	1...	..	U22
....	....	....	....	....	1..4	....	..	U08 U13
....	....	....	....	....	...4	....	..	U09
....	....	....	....	...4	..3.	....	..	U17 U21
....	....	....	....	....	..3.	....	..	U22
....	....	....	....	....	1...	....	..	U09
....	....	....	....	...4	....	....	..	U22
....	....	....	....	12..	....	....	..	U11 U16
....	....	....	....	.2..	....	....	..	U06
....	....	....	..3.	1...	....	....	..	U06
....	....	....	....	1...	....	....	..	U06
....	....	....	..34	....	....	....	..	U07 U12
....	....	....	...4	....	....	....	..	U06
....	....	....	..3.	....	....	....	..	U06
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

COPIE AL N.
IND. REV.

REVISION

PIASTRA-BOARD FIFA 2A 0610022 G

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	..3.	.2	U14 U15
....	....	....	....	....	....	....	.2	U10 U15
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	...4	..	U24 U25
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U23 U24
....	....	....	....	....	....	1...	..	U22
....	....	....	....	...4	....	1...	..	U22
....	....	....	....	....	....	1...	..	U08 U13
....	....	....	....	....	1..4	....	..	U08 U09
....	....	....	....	....	...4	....	..	U17 U21
....	....	....	....	...4	..3.	....	..	U21 U22
....	....	....	....	....	..3.	....	..	U09
....	....	....	....	....	1...	....	..	U22
....	....	....	....	..4	....	....	..	U11 U16
....	....	....	....	12..	....	....	..	U06
....	....	....	...4	.2..	....	....	..	U06
....	....	....	....	.2..	....	....	..	U06 U16
....	....	....	....	1...	....	....	..	U07 U12
....	....	....	..34	....	....	....	..	U06
....	....	....	...4	....	....	....	..	U06 U07
....	....	....	..3.	....	....	....	..	
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

REVISION

PIASTRA-BOARD FIFA 2A 0610022 G

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	..34	12.4	1.34	1234	12	U19
....	....	....	....	....	....	...3.	.2	U14 U15
....	....	....	....	....	....	.....	.2	U10
....	....	....	....	....	....	...4	1.	U20 U25
....	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	...4	..	U24
....	....	....	....	....	....	..3.	..	U10
....	....	....	....	....	....	12..	..	U18 U23
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	...4	....	1...	..	U22
....	....	....	....	....	....	1...	..	U22
....	....	....	....	....	1..4	....	..	U08 U13
....	....	....	....	....	...4	....	..	U09
....	....	....	....	...4	..3.	....	..	U17 U21
....	....	....	....	....	..3.	....	..	U22
....	....	....	....	....	1...	....	..	U09
....	....	....	....	...4	....	....	..	U22
....	....	....	....	12..	....	....	..	U11 U16
....	....	....	...4	.2..	....	....	..	U06
....	....	....	....	.2..	....	....	..	U06
....	....	....	....	1...	....	....	..	U06
....	....	....	..34	....	....	....	..	U07 U12
....	....	....	...4	....	....	....	..	U06
....	....	....	..3.	....	....	....	..	U06
....	....	....	..XX	XX.X	X.XX	XXXX	XX	U19

PIASTRA-BOARD FILC 2A 0610023 C

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	..34	12..	....	....	....	..	U02
....	....	....	.2..	....	....	....	..	U02
....	....	....	1...	....	....	....	..	U02
....	....	...4	....	....	....	....	..	U02
....	....	..3.	....	....	....	....	..	U02
....	...4	1...	....	....	....	....	..	U01
....	....	1...	....	....	....	....	..	U01
....	...4	....	....	....	....	....	..	U01

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

REVISION

COPIE A:
IND. TEC.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

EMISS. AUG 1,1968

N° 400240000

PIASTRA-BOARD FILC 2A 0610023 C

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	.2..	....	....	....	..	U02
....	....	....	1...	....	....	....	..	U02
....	....	...4	....	....	....	....	..	U02
....	....	..3.	....	....	....	....	..	U02
....	....	1...	....	....	....	....	..	U01
....	...4	....	....	....	....	....	..	U01

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

REVISION

COPIE A: TOT. REV.

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD INFU 2A 0610028 S

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	..3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	.23.	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

COPIE AD IND. REV.

REVISIONI

PIASTRA-BOARD INFU 2A 0610028 S

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
1...	....	....	....	....	....	..3.	..	U04
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	..3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
...4	.23.	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

COPIE A: / TO:

REVISIONI / REVISIONS

PIASTRA-BOARD INFU 2A 0610028 S

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
1...	....	....	....	....	....	..3.	..	U04
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	.23.	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

PIASTRA-HUARD INFU 2A 0610028 S

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	..3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	.2..	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

PIASTRA-BOARD INFU 2A 0610028 S

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
1...	....	....	....	....	....	..3.	..	U04
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	.3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	.3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	.2..	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

COPIE AL TOT.
REV. REV.

REVISION

PIASTRA-BOARD INFU 2A 0610U28 S

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	.2..	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

PIASTRA-BOARD INFU 2A 0610028 S

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	....1.		U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	..3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	.23.	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

REVISIONI

PIASTRA-BOARD INFU 2A 0610028 S

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	..3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	.23.	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

REVISION

PIASTRA-BOARD INFO 2A 0610026 S

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	..3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	.23.	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

REVISION

PIASTRA-BOARD INFU 2A 0610028 S

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	..3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	....	...4	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	..3.	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

COPIE AI FO.
INDIV. REV.

REVISION

PIASTRA-BOARD INFO 2A 0610028 S

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	..3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	..3.	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

COPIE AI FOGLI
IND. REV.
NON RIENTRANTE

PIASTRA-BOARD INFO ZA 0610028 S

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	..3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	..3.	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

REVISIONI

PIASTRA-BOARD INFO 2A U610028 S

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	..3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	.23.	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

REVISION

PIASTRA-BOARD INFU 2A 0610028 S

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	..3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	.23.	1...	....	....	....	....	..	U09
....	....	1...	....	....	....	....	..	U09
....	..3.	....	....	....	....	....	..	U09
....	.2..	....	....	....	....	....	..	U09
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

PIASTRA-BOARD INFO 2A 0610028 S

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	.23.	1...	....	....	....	....	..	U05
....	....	1...	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

REVISION

PIASTRA-BOARD INFO 2A 0610028 S

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	...4	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	....	1...	....	....	....	....	..	U05
....	.23.	....	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

PIASTRA-BUARD INFU 2A 0610028 S

PROVA-TEST = 17

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	..3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	1..4	....	..	U06
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	....	1...	....	....	....	....	..	U05
....	.23.	....	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

REVISION

PIASTRA-BOARD INFU 2A 0610028 S

PROVA-TEST = 18

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	1.	U01
....	....	....	....	....	....	....	1.	U01 V09
....	....	....	....	....	....	...4	..	U01 V08
....	....	....	....	....	....	..3.	..	U04 V07
....	....	....	....	....	..3.	.2..	..	U02
....	....	....	....	....	....	.2..	..	U02 V06
....	....	....	....	....	.2..	1...	..	U03
....	....	....	....	....	....	1...	..	U03 V05
....	....	....	....	....	...4	....	..	U06 V04
....	....	....	....	....	..3.	....	..	U02 V03
....	....	....	....	....	.2..	....	..	U03 V02
....	....	....	....	....	1...	....	..	U06 V01
....	....	1...	....	....	....	....	..	U05
....	.23.	....	....	....	....	....	..	U05
....	..3.	....	....	....	....	....	..	U05
....	.2..	....	....	....	....	....	..	U05
...4	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U04

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

REVISION

COPIE A:
TO:
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1, 1968

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD INVE 2A 0610032 H

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
						..34	.2	U06
							.2	U06
						...4	..	U06
						..3.	..	U06
					1.3.	12..	..	U08
						.2..	..	U08
						1...	..	U08
					..3.		..	U08
					1...		..	U08
.23.			.23.				..	U05
			..3.				..	U05
			.2..				..	U05
	..3.	.2.4	1...				..	U07
			1...				..	U07
		...4					..	U07
		.2..					..	U07
	..3.						..	U07
..3.							..	U05
.2..							..	U05

REVISION

COPIE A:
FO.
IND.
INV.

PIASTRA-BOARD INVE 2A 0610032 H

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
							2	U06
						4		U06
						3		U06
					2			U08
					1			U08
					3			U08
				1				U08
			3					U05
			2					U05
			1					U07
								U07
		2						U07
		3						U07
	3							U05
2								U05

REVISION

COPIE A: TO:
IND. REV.

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1,1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 371 FO. 367

PIASTRA-BOARD LOBO 2A 0610034 S

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
..3.	....	...4	....	1.3.	....	...4	12	U01
....	....	....	....	....	....	....	.2	U01 U06
....	....	....	....	....	....	...4	1.	U05
....	....	....	....	....	....	....	1.	U05 U06
....	....	....	....	....	....	...4	..	U05 U06
....	....	....	....	....	..3.	123.	..	U08
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	....	.2..	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	..3.	....	..	U08
....	....	....	....	1.3.	....	....	..	U07
....	....	....	....	..3.	....	....	..	U06 U07
..3.	....	....	....	1...	....	....	..	U03
....	....	....	....	1...	....	....	..	U03 U04 U07
....	1...	....	..34	....	....	....	..	U04
....	....	....	...4	....	....	....	..	U03
....	1...	....	....	....	....	....	..	U03
..3.	....	....	....	....	....	....	..	U03

PIASTRA-BOARD LUBO 2A 0610034 5

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
..3.	....	...4	....	1.3.	....	...4	12	U01
....	....	....	....	..3.	....	...4	12	U06
....	....	....	....	....	....	....	.2	U01 U06
..3.	....	...4	....	1.3.	....	...4	1.	U01
....	....	....	....	....	....	....	1.	U05 U06
....	....	....	....	....	....	...4	..	U05 U06
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	....	.2..	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	.3..	....	..	U08
....	....	....	....	..3.	....	....	..	U06 U07
....	....	....	....	1...	....	....	..	U03
....	1...	....	..34	....	....	....	..	U04
....	1...	....	...4	....	....	....	..	U03
....	....	....	...4	....	....	....	..	U03 U04 U07
....	1...	....	....	....	....	....	..	U03
..3.	....	....	....	....	....	....	..	U03

REVISION

COPIE A:
TOL.
INV.
REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEDE
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1.1968

PIASTRA-BOARD LORO 2A 0610034 S

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U01 U06
....	....	....	..3.	..3.	....	...4	1.	U04
....	....	....	....	....	....	...4	1.	U05
....	....	....	....	....	....	....	1.	U05 U06
....	....	....	....	....	....	...4	..	U05 U06
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	....	.2..	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	..3.	....	..	U08
....	....	....	....	..3.	....	....	..	U06 U07
....	....	....	...4	1...	....	....	..	U04 U07
....	....	....	....	1...	....	....	..	U03
....	....	....	...4	....	....	....	..	U03
....	....	...4	....	....	....	....	..	U01
....	1...	....	....	....	....	....	..	U03
..3.	....	....	....	....	....	....	..	U03

PIASTRA-BOARD LOBO 2A 0610034 S

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	..3.	....	...4	12	U06
....	....	....	....	....	....	....	.2	U01 U06
....	....	....	..34	1.3.	....	...4	1.	U04
....	....	....	..3.	..3.	....	...4	1.	U04
....	....	....	....	....	....	....	1.	U05 U06
....	....	....	....	....	....	...4	..	U05 U06
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	....	....	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	..3.	....	..	U06 U07
....	....	....	....	..3.	....	....	..	U03 U04 U07
....	....	....	....	1...	....	....	..	U01
....	....	...4	....	....	....	....	..	U03
..3.	....	....	....	....	....	....	..	

REVISION

COPIE A:
C.
TO:
IND.
REV.

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD LOGO 28 0610035 W

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	1.3.	.2	U08
....	....	....	....	....	....	....	.2	U06 U08
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	..3.	1...	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	..3.	....	....	..	U06
....	....	....	..34	12..	....	....	..	U05
....	....	....	....	.2..	....	....	..	U05
....	....	....	....	1...	....	....	..	U05
....	....	....	...4	....	....	....	..	U05
....	....	....	..3.	....	....	....	..	U05
....	....	....	12..	....	....	....	..	U07
....	....	.3.	.2..	....	....	....	..	U07
....	....	....	.2..	....	....	....	..	U07
....	....	..3.	....	....	....	....	..	U07

REVISION

COPIA AI FOI
RIPRODUZIONE VIETATA

PIASTRA-BOARD LOBO 2B 0610035 W

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	..3.	....	....	.2.	U06
....	....	....	....	....	....	....	.2	U06 U08
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	..3.	..3.	....	..	U08
....	....	....	....	..3.	....	....	..	U06
....	....	....	....	.2..	....	....	..	U05
....	....	....	....	1...	....	....	..	U05
....	....	....	...4	....	....	....	..	U05
....	....	....	..3.	....	....	....	..	U05
....	....	....	12..	....	....	....	..	U07
....	....	....	.2..	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	..3.	....	....	....	....	..	U07

REVISION

COPIE A:
IND. REV.

UNIT K270

COMPIL. GE 425
EMISS. AUG 1 1968
APPR.
SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)
Nº 400240000
CONT. SU FO. 378 FO. 377

PIASTRA-BOARD LOBO 2B 0610035 H

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U06 U08
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	..3.	..3.	1...	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	..3.	..3.	....	..	U08
....	....	....	....	..3.	....	....	..	U06
....	....	....	....	-2..	....	....	..	U05
...	....	....	....	1...	....	....	..	U05
....	....	....	...4	....	....	....	..	U05
....	....	....	..3.	....	....	....	..	U05
....	....	....	.2..	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	..3.	....	....	....	....	..	U07

REVISION

COPIE N.
INCL. REF.

UNIT K270

COMPIL. GE 425
EMISS. AUG 1,1968

APPR. 2L

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

PIASTRA-BOARD LUBO 2B 0610035 W

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U06
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	..3.	....	..	U08
....	....	....	....	..3.	....	....	..	U06
....	....	....	.2..	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07

REVISION

COPIE A:
INT. TO:
REV.

UNIT K279

COMPIL. GE 425

APPR. AL

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

PIASTRA-BOARD LOGI 2A" 0610036 A

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
					4	2 4	2	U30
							2	U25 U30
						4		U30
						2		U25 U30
	1				3	1		U28
					3	1		U28 U29
						1		U18 U29
					4			U30
					3			U18 U29
			1 3 4		1			U27
					1			U27
	3			1 4				U28
				1 4				U23
				4				U23 U29
				1				U23 U29
								U17 U27
								U27
3	1		2					U26
			2					U26
			1					U27
	3							U16 U26 U28
	1							U21 U26 U28
3								U21 U26

REVISIONI

COPIE A: TOT. IND. INV.

UNIT K27

COMPIL. GE 425

APPR.

SEZ. SPS - OGE

SEC.

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1, 1968

CONT. SU FO. 382 FO. 381

PIASTRA-BOARD LOGI 2A 0610036 A

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
					4	2 4	2	U30
							2	U30
							4	U24 U30
						2		U30
	1				3	1		U28
					3	1		U18 U28
						1		U18 U29
					4			U24 U30
					3			U18 U29
			1 34		1			U27
					1			U22 U27
			1 4					U29
			4					U23 U29
			1					U23 U29
			4					U27
			3					U27
3	3		2					U26
			2					U16 U26
			1					U27
	3							U16 U26
	1							U21 U26 U28
3								U26

REVISION

PIASTRA-BUARD LOGI ZA U610036 A

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
						2	2	U25
							2	U25 U30
	1.3.			1.4	1.34	1.4		U28
						4	4	U28 U30
						4	4	U24 U30
						2		U25 U30
				1.4	.3.	1		U29
						1		U29
					4			U24 U30
					3			U29
			1.3.		1			U27
					1			U22 U27 U28
	3.			1.4				U28
				4				U23 U29
				1				U23 U29
			4					U17 U27 U28
			3.					U22 U27
3.	1.3.		2.					U26
			2.					U26
			1					U27
	3.							U16 U26
	1							U26
3.								U26

REVISIONI

PIASTRA=BOARD LUGI 2A 0610036 A

PROVA=TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	.2.4	.2	U30
....	....	....	....	....	....	....	.2	U30
....	....	....	....	....	....	...4	..	U30
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	1..4	.3..	1...	..	U29
....	....	....	....	....	....	1...	..	U29
....	....	....	....	....	...4	....	..	U30
....	....	....	....	....	.3..	....	..	U29
....	....	....	1.34	....	1...	....	..	U27
....	....	....	....	....	1...	....	..	U27
....	....	....	....	...4	....	....	..	U23 U29
....	....	....	....	1...	....	....	..	U23 U29
....	....	....	...4	....	....	....	..	U27
....	....	....	..3.	....	....	....	..	U27
..3.	1.3.	....	.2..	....	....	....	..	U26
....	....	....	.2..	....	....	....	..	U26
....	....	....	1...	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U16 U26
....	1...	....	....	....	....	....	..	U26
..3.	....	....	....	....	....	....	..	U26

MODIFICHE

COPIE A:
INT.
EST.

PIASTRA-BOARD LOGI 2A 0610036 A

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..4	.2.4	.2.	U30
....	....	....	....	....	....	....	.2.	U30
....	....	....	....	....	....	...4	..	U30
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	1..4	..3.	1...	..	U29
....	....	....	....	....	....	1...	..	U29
....	....	....	....	....	..4	....	..	U30
....	....	....	....	....	.3.	....	..	U29
....	....	....	1.34	....	1...	....	..	U27
....	....	....	....	....	1...	....	..	U27
....	....	....	....	...4	....	....	..	U23 U29
....	....	....	....	1...	....	....	..	U23 U29
....	....	....	...4	....	....	....	..	U27
....	....	....	.3.	....	....	....	..	U22 U27
....	1.3.	....	.2..	....	....	....	..	U26 U28
....	....	....	.2..	....	....	....	..	U16 U26 U28
....	....	....	1...	....	....	....	..	U27
....	.3.	....	....	....	....	....	..	U16 U26 U28
....	1...	....	....	....	....	....	..	U26
.3.	....	....	....	....	....	....	..	U21 U26 U28

REVISION

COPIE AI FO.
IND. REV.

UNIT K270

COMPIL. BE 425

APPR. Al

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1 1968

PIASTRA=BOARD LOGI 2A 0610036 A

PROVA=TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
						2	2	U30
							2	U25 U30
						4		U24 U28
							4	U24 U30
						2		U25 U30
	1		2		13	1		U28
				14	3	1		U29
			2		3	1		U28
						1		U18 U29
					4			U24 U30
					3			U18 U29
			34		1			U27
					1			U22 U27 U28
				4				U29
			1					U29
				4				U27
			3					U22 U27
3	13		2					U26
			2					U16 U26
			1					U17 U27 U28
	3							U26
	1							U26
3								U26

REVISION

COPIE A:
IND.
DEST.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

EMISS. AUG 1,1968

Nº 400240000

CONT. SU FO. 387 FO. 386

PIASTRA-BUARD LUGI 2A 0610036 A

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
								U30
								U30
								U30
								U30
								U29
								U18 U29
								U30
								U18 U29
								U27
								U27
								U29
								U29
								U27
								U27
								U16 U26 U28
								U17 U27
								U26
								U26
								U21 U26 U28
								U21 U26

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

Nº APPLIC. GE 130

CONT. SU FO. 389 FO. 388

PIASTRA=BOARD LOGI 2A 0610036 A

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	.2.4	.2	U30
....	....	....	....	....	....	....	.2	U30
....	....	....	....	....	....	...4	..	U24 U30
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	1..4	..3.	1...	..	U29
....	....	....	....	....	....	1...	..	U29
....	....	....	....	....	...4	....	..	U24 U30
....	....	....	....	....	..3.	....	..	U29
....	....	....	1.34	....	1...	....	..	U27
....	....	....	....	....	1...	....	..	U27
....	....	....	....	...4	....	....	..	U29
....	....	....	....	1...	....	....	..	U29
....	....	....	...4	....	....	....	..	U27
....	....	....	..3.	....	....	....	..	U27
.3.	1.3.	....	.2..	....	....	....	..	U26
....	....	....	.2..	....	....	....	..	U26
....	....	....	1...	....	....	....	..	U17 U27
....	..3.	....	....	....	....	....	..	U26
....	1...	....	....	....	....	....	..	U26
..3.	....	....	....	....	....	....	..	U26

REVISIONI

COPIE AI
IND. REV.

UNIT K270

COMPIL. GE 425 APPR. SEZ. SPS - OGE

EMISS. AUG 1,1968 SEC. LOC. PREGNANA (MI)

Nº 400240000

PIASTRA-BOARD LOGI 2A 0610036 A

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	.2.4	.2	U30
....	....	....	....	....	....	....	.2	U25 U30
....	....	....	....	....	....	...4	..	U30
....	....	....	....	....	....	.2..	..	U25 U30
....	....	....	....	1.4	.3.	1...	..	U29
....	....	....	....	....	....	1...	..	U29
....	....	....	....	....	...4	....	..	U30
....	....	....	....	....	.3.	....	..	U29
....	....	....	....	....	1...	....	..	U22 U27 U28
....	....	....	....	...4	....	....	..	U29
....	....	....	....	1...	....	....	..	U29
....	....	....	1.34	....	....	....	..	U27
....	....	....	...4	....	....	....	..	U17 U27
....	....	....	.3.	....	....	....	..	U27
.3.	1.3.	....	.2..	....	....	....	..	U26
....	....	....	.2..	....	....	....	..	U26
....	....	....	1...	....	....	....	..	U17 U27
....	.3.	....	....	....	....	....	..	U26
....	1...	....	....	....	....	....	..	U21 U26 U28
.3.	....	....	....	....	....	....	..	U26

PIASTRA-BOARD LOGI 2A 0610636 A

PROVA-TEST = 18

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘2∘4	∘2	U30
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2	U30
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘	U24 U30
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘∘	∘∘	U30
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘4	∘∘3∘	1∘∘∘	∘∘	U29
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘∘	∘∘	U29
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘∘∘	∘∘	U24 U30
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘∘∘	∘∘	U29
∘∘3∘	1∘3∘	∘∘∘∘	12∘4	∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘	U28
∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘4	∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘	U27
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘	U27
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘∘∘	∘∘∘∘	∘∘	U29
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U29
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U17 U27 U28
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U22 U27
∘∘3∘	1∘3∘	∘∘∘∘	∘2∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U26
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U26
∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U17 U27 U28
∘∘∘∘	∘∘3∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U26
∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U26
∘∘3∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U21 U26 U28

PIASTRA-BOARD LOGI 2A 0610036 A

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	.2.4	.2	U30
....	....	....	....	....	....	....	.2	U30
....	..3.	....	....	....	....	...4	..	U30
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	1..4	..3.	1...	..	U29
....	....	....	....	....	....	1...	..	U18 U29
....	....	....	...3	....	....	...4	..	U30
....	....	....	....	....	..3.	....	..	U18 U29
....	....	....	1.34	....	1...	....	..	U27
....	....	....	....	....	1...	....	..	U27
....	....	....	....	..4	....	....	..	U29
....	....	....	...1	1...	....	....	..	U29
....	....	....	..4	....	....	....	..	U27
....	....	....	..3.	....	....	....	..	U27
.3.	1.3.	....	.2..	....	....	....	..	U26
....	....	....	.2..	....	....	....	..	U26
....	....	....	1...	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U26
....	1...	....	...3	....	....	....	..	U21 U26
..3.	....	....	....	....	....	....	..	U26

PIASTRA-BOARD LUGI 2A U6100036 A

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	.2.4	.2	U30
....	....	....	....	....	....	....	.2	U30
....	....	....	....	....	....	...4	..	U30
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	1..4	..3.	1...	..	U29
....	....	....	....	....	....	1...	..	U29
....	....	....	....	....	...4	....	..	U30
....	....	....	....	....	..3.	....	..	U29
....	....	....	1.34	....	1...	....	..	U27
....	....	....	....	....	1...	....	..	U27
....	....	....	....	...4	....	....	..	U29
....	....	....	....	1...	....	....	..	U29
....	....	....	...4	....	....	....	..	U27
....	....	....	..3.	....	....	....	..	U27
..3.	1.3.	....	.2..	....	....	....	..	U26
....	....	....	.2..	....	....	....	..	U26
....	....	....	1...	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U26
....	1...	....	....	....	....	....	..	U26
..3.	....	....	....	....	....	....	..	U21 U26

REVISION

PIASTRA-BOARD LOGI 2A 0610036 A

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
					4	2,4	2	U30
							2	U30
						4		U30
						2		U30
				1,4	3	1		U29
						1		U29
					4			U30
					3			U29
			1,34		1			U27
					1			U27
					4			U29
				1				U29
			4					U27
			3					U27
3	1,3		2					U26
			2					U16 U26
			1					U27
	3							U26
	1							U26
3								U26

PIASTRA-BOARD LOGI 2A 0610036 A

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	···4	·2·4	·2	U30
····	····	····	····	····	····	····	·2	U25 U30
····	····	····	····	····	····	···4	··	U30
····	····	····	····	····	····	·2··	··	U25 U30
····	····	····	····	1··4	··3·	1···	··	U29
····	····	····	····	····	····	1···	··	U29
····	····	····	····	····	···4	····	··	U30
····	····	····	····	····	·3··	····	··	U29
····	····	····	1·34	····	1···	····	··	U27
····	····	····	····	····	1···	····	··	U27
····	····	····	····	···4	····	····	··	U29
····	····	····	····	1···	····	····	··	U29
····	····	····	···4	····	····	····	··	U17 U27
····	····	····	··3·	····	····	····	··	U27
··3·	1·3·	····	·2··	····	····	····	··	U26
····	····	····	·2··	····	····	····	··	U26
····	····	····	1···	····	····	····	··	U27
····	··3·	····	····	····	····	····	··	U26
····	1···	····	····	····	····	····	··	U26
·3··	····	····	····	····	····	····	··	U26

REVISION

COPIE A:
IND. TO:
REV.

UNIT K27D

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

EMISS. AUG 1 1968

Nº 400248000

PIASTRA-BUARD LUGI 2A 0610036 A

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘2∘4	∘2	U30
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2	U30
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘	U30
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘∘	∘∘	U30
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘4	∘3∘	1∘∘∘	∘∘	U29
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘∘	∘∘	U29
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘∘∘	∘∘	U30
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘∘∘	∘∘	U29
∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘34	∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘	U27
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘	U22 U27
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘∘∘	∘∘∘∘	∘∘	U29
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U29
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U27
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U27
∘∘3∘	1∘3∘	∘∘∘∘	∘2∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U26
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U26
∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U27
∘∘∘∘	∘∘3∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U26
∘∘∘∘	1∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U26
∘3∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U26

PIASTRA-BOARD LOGI 2A 0610036 A

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	.2.4	.2	U30
....	....	....	....	....	....	2	.2	U30
....	....	....	....	....	....	...4	..	U30
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	1..4	..3.	1...	..	U29
....	....	....	....	....	....	1...	..	U29
....	....	....	....	....	...4	....	..	U30
....	....	....	....	....	..3.	....	..	U29
....	....	....	1.34	....	1...	....	..	U27
....	....	....	....	....	1...	....	..	U27
....	....	....	....	...4	....	....	..	U29
....	....	....	....	1...	....	....	..	U29
....	....	....	...4	....	....	....	..	U27
....	....	....	..3.	....	....	....	..	U22 U27
..3.	1.3.	....	.2..	....	....	....	..	U26
....	....	....	.2..	....	....	....	..	U26
....	....	....	1...	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U26
....	1...	....	....	....	....	....	..	U26
..3.	....	....	....	....	....	....	..	U26

REVISION

PIASTRA-BUARD LOGI 2B 0610037 E

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.2..	..	U29
....	....	....	....	....	....	1...	..	U29
....	....	....	....	....	..3.	....	..	U29
....	....	....	....	....	.2..	....	..	U29
....	....	....	....	.2.4	....	....	..	U27 U28
....	....	2.4	....	...4	....	....	..	U30
....	....	....	....	...4	....	....	..	U28
....	....	....	....	..3.	....	....	..	U28
....	.3.	....	....	.2..	....	....	..	U30
....	....	....	....	.2..	....	....	..	U28
....	....	....	....	1...	....	....	..	U28
....	....	....	...4	....	....	....	..	U22
....	....	....	.3..	....	....	....	..	U22
....	....	...4	....	....	....	....	..	U27
....	....	.3..	....	....	....	....	..	U22
....	.3.	.2..	....	....	....	....	..	U26
....	....	.2..	....	....	....	....	..	U22
....	.3.	....	....	....	....	....	..	U21
...4	....	....	....	....	....	....	..	U21
.3.	....	....	....	....	....	....	..	U21
.2..	....	....	....	....	....	....	..	U21

PIASTRA-BOARD LOGI 2R 551003/ E

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	.23.	.2..	..	U27
....	....	....	....	....	.23.	.2..	..	U29
....	....	....	....	....	....	.2..	..	U29
....	....	....	....	....	....	1...	..	U29
....	....	....	....	....	.3..	....	..	U29
....	....	....	....	....	.2..	....	..	U29
....	.3..	.2.4	....	.2.4	....	....	..	U30
....	....	.2.4	....	...4	....	....	..	U30
....	....	....	....	...4	....	....	..	U28
....	....	....	....	..3.	....	....	..	U28
....	.3..	....	....	.2..	....	....	..	U30
....	....	....	....	.2..	....	....	..	U28
....	....	....	....	1...	....	....	..	U28
....	....	....	...4	....	....	....	..	U22
.234	....	....	..3.	....	....	....	..	U26
....	....	....	..3.	....	....	....	..	U22
....	....	...4	....	....	....	....	..	U27
....	....	..3.	....	....	....	....	..	U22
....	....	.2..	....	....	....	....	..	U22
....	.3..	....	....	....	....	....	..	U21
.234	....	....	....	....	....	....	..	U21
...4	....	....	....	....	....	....	..	U21
..3.	....	....	....	....	....	....	..	U21
.2..	....	....	....	....	....	....	..	U21

REVISION

PIASTRA-BOARD LOGI 2R 0610037 E

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	...4	....	1234	.23.	12..	..	U27
....	....	....	....	1234	.23.	12..	..	U27
....	....	....	....	....	....	.2..	..	U29
....	....	....	....	....	....	1...	..	U29
....	....	....	....	....	..3.	....	..	U29
....	....	....	....	....	.2..	....	..	U29
....	....	....	....	...4	....	....	..	U28
....	....	....	....	..3.	....	....	..	U28
....	....	....	....	.2..	....	....	..	U28
....	....	....	....	1...	....	....	..	U28
.234	..3.	.23.	..34	....	....	....	..	U26
....	....	....	...4	....	....	....	..	U22
....	....	....	..3.	....	....	....	..	U22
....	....	...4	....	....	....	....	..	U27 U30
....	....	..3.	....	....	....	....	..	U22
....	....	.2..	....	....	....	....	..	U22
....	..3.	....	....	....	....	....	..	U21
...4	....	....	....	....	....	....	..	U21
..3.	....	....	....	....	....	....	..	U21
.2..	....	....	....	....	....	....	..	U21

PIASTRA-BOARD LOGI 2B 0610037 E

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	...4	....	1234	.23.	12..	..	U27
....	....	....	....	1234	.23.	12..	..	U27
....	....	....	....	....	....	.2..	..	U29
....	....	....	....	....	....	1...	..	U29
....	....	....	....	....	..3.	....	..	U29
....	....	....	....	....	.2..	....	..	U29
....	....	....	....	...4	....	....	..	U28
....	....	....	....	..3.	....	....	..	U28
....	....	....	....	.2..	....	....	..	U28
....	....	....	....	1...	....	....	..	U28
.234	..3.	.23.	..34	....	....	....	..	U26
....	....	....	...4	....	....	....	..	U22
....	....	....	.3..	....	....	....	..	U22
....	....	...4	....	....	....	....	..	U27 U30
....	....	..3.	....	....	....	....	..	U22
....	....	.2..	....	....	....	....	..	U22
....	..3.	....	....	....	....	....	..	U21
...4	....	....	....	....	....	....	..	U21
..3.	....	....	....	....	....	....	..	U21
.2..	....	....	....	....	....	....	..	U21

REVISION

PIASTRA-BOARD LOGI 28 0610037 E

A- E 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1.3.	.23.	12..	..	U27
....	....	....	....	....	.23.	12..	..	U29
....	....	....	....	....	....	.2..	..	U29
....	....	....	....	....	....	1...	..	U29
....	....	....	....	....	.3.	....	..	U29
....	....	....	....	....	.2.	....	..	U29
....	.3.	.2.4	....	.2.4	....	....	..	U30
....	....	.2.4	....	...4	....	....	..	U30
....	....	....	....	...4	....	....	..	U28
....	....	....	....	1.3.	....	....	..	U28
....	....	....	....	..3.	....	....	..	U28
....	.3.	....	....	.2..	....	....	..	U30
....	....	....	....	.2..	....	....	..	U28
....	....	....	....	1...	....	....	..	U28
.234	....	..3.	..34	....	....	....	..	U26
....	....	..3.	..34	....	....	....	..	U22
....	....	....	...4	....	....	....	..	U22
....	....	....	..3.	....	....	....	..	U22
....	....	...4	....	....	....	....	..	U27
....	....	..3.	....	....	....	....	..	U22
....	....	.2..	....	....	....	....	..	U22
....	.3.	....	....	....	....	....	..	U21
.234	....	....	....	....	....	....	..	U21
...4	....	....	....	....	....	....	..	U21
..3.	....	....	....	....	....	....	..	U21
.2..	....	....	....	....	....	....	..	U21

PIASTRA-BOARD LOGI 2R 0610037 E

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.234	..3.	.23.	..34	1234	.23.	12..	..	U26
....	....	....	....	1234	.23.	12..	..	U27
....	....	....	....	....	.23.	12..	..	U29
....	....	....	....	....	....	.2..	..	U29
....	....	....	....	....	....	1...	..	U29
....	....	....	....	....	..3.	....	..	U29
....	....	....	....	....	.2..	....	..	U29
....	....	....	....	1234	....	....	..	U28
....	....	.2.4	....	...4	....	....	..	U30
....	....	....	....	...4	....	....	..	U28
....	....	....	....	..3.	....	....	..	U28
....	..3.	....	....	.2..	....	....	..	U30
....	....	....	....	.2..	....	....	..	U28
....	....	....	....	1...	....	....	..	U28
.234	..3.	.23.	..34	....	....	....	..	U26
....	....	.23.	..34	....	....	....	..	U22
....	....	....	...4	....	....	....	..	U22
....	....	....	..3.	....	....	....	..	U22
....	....	...4	....	....	....	....	..	U27
....	....	..3.	....	....	....	....	..	U22
....	....	.2..	....	....	....	....	..	U22
.234	..3.	....	....	....	....	....	..	U21
....	..3.	....	....	....	....	....	..	U21
...4	....	....	....	....	....	....	..	U21
..3.	....	....	....	....	....	....	..	U21
.2..	....	....	....	....	....	....	..	U21

REVISION

PIASTRA-BOARD LOGI 2R 0610037 E

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.234	..3.	.23.	..34	1234	.23.	12..	..	U26
....	....	...4	....	1234	.23.	12..	..	U27
....	....	....	....	1234	.23.	12..	..	U27
....	....	....	....	....	....	.2..	..	U29
....	....	....	....	....	....	1...	..	U29
....	....	....	....	....	..3.	....	..	U29
....	....	....	....	....	.2..	....	..	U29
....	....	....	....	...4	....	....	..	U28
....	....	....	....	..3.	....	....	..	U28
....	....	....	....	.2..	....	....	..	U28
....	....	....	....	1...	....	....	..	U28
.234	..3.	.23.	..34	....	....	....	..	U26
....	....	....	...4	....	....	....	..	U22
....	....	....	..3.	....	....	....	..	U22
....	....	...4	....	....	....	....	..	U27 U30
....	....	..3.	....	....	....	....	..	U22
....	....	.2..	....	....	....	....	..	U22
....	..3.	....	....	....	....	....	..	U21
...4	....	....	....	....	....	....	..	U21
..3.	....	....	....	....	....	....	..	U21
.2..	....	....	....	....	....	....	..	U21

PIASTRA=BOARD LOGI 2C 0610038 T

PROVA=TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
							2	U28
		1						U27 V09
	4							U28 V05
	3							U26 V04
	2							U27 V08
	1							U27 V07
4								U26 V01
3								U27 V06
2								U26 V02
1								U26 V03

COPIE AU TOT.
IND. REV.

REVISION

PIASTRA-BOARD LOGI 20 0610038 1

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	...4	....	....	....	....	....	.2	U28
....	....	....	....	....	....	....	.2	U28
.3.	12..	1...	....	....	....	....	..	U27
....	....	1...	....	....	....	....	..	U27 V09
....	...4	....	....	....	....	....	..	U28 V05
12.4	..3.	....	....	....	....	....	..	U26
....	..3.	....	....	....	....	....	..	U26 V04
....	.2..	....	....	....	....	....	..	U27 V08
....	1...	....	....	....	....	....	..	U27 V07
...4	....	....	....	....	....	....	..	U26 V01
.3.	....	....	....	....	....	....	..	U27 V06
.2..	....	....	....	....	....	....	..	U26 V02
1...	....	....	....	....	....	....	..	U26 V03

REVISION

PIASTRA-BOARD LOGI 2C 0610038 1

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.	.	.	.	.	.	.	2	U28
.	.	1	.	.	.	.	.	U27 V09
.	4	.	.	.	.	.	.	U28 V05
.	3	.	.	.	.	.	.	U26 V04
.	2	.	.	.	.	.	.	U27 V08
1	.	.	.	.	.	.	.	U27 V07
4	.	.	.	.	.	.	.	U26 V01
3	.	.	.	.	.	.	.	U27 V06
2	.	.	.	.	.	.	.	U26 V02
1	.	.	.	.	.	.	.	U26 V03

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD LOSE 2A 0610039 X

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U06
....	....	....	.4	....	....	.3.	..	U05
....	....	....	....	....	....	.3.	..	U05 U06 U08
....	....	....	....	.3.	....	....	..	U06
....	....	....	.4	....	....	....	..	U05 U06 U07

REVISION

PIASTRA-BOARD LOSE 24 0810039 A

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••	••••	••••	••••	••••	••••	••••	•2	U06
•••	••••	••••	•••4	••3•	••••	••3•	••	U06
•••	••••	••••	••••	••••	••••	••3•	••	U05 U06 U08
•••	••••	••••	••••	••3•	••••	••••	••	U06
•••	••••	••••	•••4	••••	••••	••••	••	U05 U06 U07

PIASTRA-BOARD LOSE 2A 0610039 X

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
							2	U06
			4			3		U06
						3		U05 U06 U08
				3		3		U06
			4					U05 U06 U07

REVISION

COPIE AL TO:
IND. REV.

		UNIT K270	
COMPIL. GE 425	APPR.	SEZ. SPS - OGE SEC.	Nº 400240000
EMISS. AUG 1,1968		LOC. PREGNANA (MI)	CONT. SU FO. 419 FO. 418

PIASTRA-BOARD LOSE 2A 0610039 X

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	...4	....	....	..3.	..	U06
....	....	....	....	....	....	..3.	..	U05 U06 U08
....	....	....	...3	..3.	....	....	..	U06
....	....	....	...4	....	....	....	..	U05 U06 U07

REVISION

COPIE A: FO. IND. REV.

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1,1968

SEZ. SPS - OGE
SEDE
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 420 FO. 419

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

CONT. SU FO. 421 FO. 420

PIASTRA=BOARD LOSE 2A 0610039 X

PROVA=TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...	....	....	...4	....	....	..3.	..	U06
...	....	....	....	....	....	..3.	..	U05 U06 U08
...	....	....	....	..3.	....	....	..	U06
...	....	....	...4	....	....	....	..	U05 U06 U07

REVISION

COPIE A.D. TRID. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

CONT. SU FO. 421 FO. 420

PIASTRA-GUARD LOSE 2A 0610039 X

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	..3.	....	....	..	U06
....	....	....	...4	....	....	....	..	U07

PIASTRA-BOARD LOSE 2A 0610039 X

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••••	•••••	•••••	•••••	•••••	•••••	••3••	••	U08
•••••	•••••	•••••	•••••	••3••	•••••	•••••	••	U06
•••••	•••••	•••••	•••4	•••••	•••••	•••••	••	U07

REVISION

PIASTRA-BOARD LUSE 2A 0610039 A

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	····	··3·	··	U08
····	····	····	····	··3·	····	····	··	U06
····	····	····	···4	····	····	····	··	U07

COPIE N.
TIPO DOC.
REVISIONI

UNITY K270

COMPIL. GE 425

APPR.

SCZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

EMISS. AUG 1, 1968

Nº 400240000

CONT. SU FO. 424 FO. 423

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

I^a APPLIC. GE 130

CONT. SU FO. 425

PIASTRA-BOARD LOSE 2A 0610039 X

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	..3.	....	....	..	U06
....	....	....	...4	....	....	....	..	U07

REVISION

COPIE A:
IND. REV.:

UNIT K270

COMPIL. GE 425 APPR. SEZ. SPS - OGE

EMISS. AUG 1,1968 SEC. LOC. PREGNANA (MI)

N° 400240000

PIASTRA-BOARD LOSE 2A 0610039 X

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
						3		U08
				3				U06
			4					U07

REVISION

PIASTRA-BOARD LOSE 2A 0610039 X

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
						3		U08
				3				U06
			4					U07

REVISION

PIASTRA-BOARD LOSE 2A 0610039 X

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••	•••	•••	•••	•••	•••	•3•	••	U08
•••	•••	•••	•••	•3•	•••	•••	••	U06
•••	•••	•••	•4•	•••	•••	•••	••	U07

REVISIONI

PIASTRA-BOARD LOSE 2B 0610040 V

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U05 U06
....	....	....	....	....	....	....	1.	U06 U07
....	....	....	....	....	....	...1	..	U06 U08
....	....	....	....	.3	....	....	..	U06

PIASTRA=BOARD LOGE 28 0610040 V

PROVA=TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	.....	....	....	....	....	...4	12	U06
....	.....	....	....	....	....	....	.2	U05 U06
....	.....	....	....	....	....	....	1.	U06 U07
....	.....	....	....	....	....	...4	..	U06 U08
....	.....	....	....	..3.	....	....	..	U06

REVISION

PIASTRA-BOARD LOSE 2B U610040 V

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
						4	12	U06
							2	U05 U06
							1	U06 U07
						4		U06 U08
				3				U06

COPIE AL TOS.
ING. REV.

REVISION

		UNITY K270	
COMPIL. GE 425	APPR.	SEZ. SEC. SPS - OGE	Nº 400240000
EMISS. AUG 1, 1968		LOC. PREGNANA (MI)	CONT. SU FO. 434 FO. 433

PIASTRA-BOARD LOSE 28 0610040 V

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	12	U06
....	....	....	....	....	....	....	2	U05 U06
....	....	....	....	....	....	....	1.	U06 U07
....	....	....	....	....	....	...4	..	U06 U08

REVISION

PIASTRA-BOARD LOSE 28 U610040 V

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	••••	•••4	12	U06
••••	••••	••••	••••	••••	••••	••2•		U05 U06
••••	••••	••••	••••	••••	••••	•1••		U06 U07
••••	••••	••••	••••	••••	••••	••4•		U06 U08

REVISION

COPIE N.
TO:
IND. REV.

PIASTRA-BOARD LOSE 2B 0610040 V

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	.....	....	....	....	....	...4	12	U06
....	.....	....	....	....	....	....	.2	U05 U06
....	.....	....	....	....	....	....	1.	U06 U07
....	.....	....	....	....	....	...4	..	U06 U08

PIASTRA-BOARD LOSE 2B 0610040 V

PROVA-TEST # 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	12	U06
....	....	....	....	....	....	....	2	U05 U06
....	....	....	....	....	....	....	1	U06 U07
....	....	....	....	....	....	...4	..	U06 U08

REVISIONI

PIASTRA-BOARD LOSE 2B 0610040 V

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	12	U06
....	....	....	....	....	....	....	.2	U05 U06
....	....	....	....	....	....	....	1.	U06 U07
....	....	....	....	....	....	...4	..	U06 U08

REVISION

COPIE A:
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

EMISS. AUG 1,1968

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

N° 400240000

CONT. SU FO. 439 FO. 438

PIASTRA-BOARD LOSE 28 0610040 V

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•	•	•	•	•	•	•	4 12	U06
•	•	•	•	•	•	•	•2	U05 U06
•	•	•	•	•	•	•	1•	U06 U07
•	•	•	•	•	•	•	4•	U06 U08

TASTRA-BOARD LUCE ZC U610041 W

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	.23.	1...	....	....	.2	U05
....	....	....	....	1...	....	....	.2	U05
....	....	....	....	....	....	....	.2	U06
....	....	....	....	...4	....	....	1.	U06
....	....	....	....	....	....	....	1.	U06
....	....	....	....	....	....	....	..4	U06 U08
....	....	....	....	...4	....	....	..	U06
....	....	....	.23.	....	....	....	..	U05
....	....	....	..3.	....	....	....	..	U07
....	....	...4	1...	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	1..4	....	....	....	....	..	U07
....	....	1...	....	....	....	....	..	U07

REVISION

COPIE A: / TO:
IND. / REF.

PIASTRA-BOARD LOSE 2C 0610041 H

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
e								
....	....	....	....	....	....	...4	12	U06
....	....	....	....	1...	....	....	.2	U05
....	....	....	....	....	....	....	.2	U06
....	....	....	....	...4	....	....	1.	U06
....	....	....	....	....	....	....	1.	U06
....	....	....	....	....	....	....	4.	U06 U08
....	....	....	.23.	....	....	....	..	U05
....	....	....	1.3.	....	....	....	..	U07
....	....	....	..3.	....	....	....	..	U07
....	....	...4	1...	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	1...	....	....	....	....	..	U07

REVISION

COPIE A: TOI. IND. REV.

PIASTRA-BOARD LOSE 2C 0610041 W

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
						4	12	U06
				1			2	U05
							2	U06
				4			1	U06
							1	U06
						4		U06 U08
			23					U05
			13					U07
			3					U07
		4	1					U07
			1					U07
		1						U07

REVISION

COPIE A.
IND.
INV.

UNIT K270

COMPIL. GE 425

APPR.

EMISS. AUG 1, 1968

SER. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 444 FO. 443

PIASTRA=BOARD LOSE 2C 0610041 W

PROVA=TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...	...	...	...	...	...	...4	12	U06
...	...	...	...	1...	...	...	.2	U05
...	...	...	...	...	...	...	.2	U06
...	...	...	...	...	...	...	1.	U06
...	...	...	...	...	...	...4	..	U06 U08
...	...	...	.23.	...	...	...	..	U05
...	...	...	1.3.	...	...	...	..	U07
...	...	...	..3.	...	...	...	..	U07
...	...	...	1...	...	...	...	..	U07
...	...	1...	...	...	...	...	..	U07

PIASTRA-BOARD LOSE 2C 0610041 W

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	12	U06
....	....	....	....	1...	....	....	.2	U05
....	....	....	....	....	....	....	.2	U06
....	....	....	....	....	....	....	1.	U06
....	....	....	....	....	....	...4	..	U06 U08
....	....	....	.23.	....	....	....	..	U05
....	....	....	1.3.	....	....	....	..	U07
....	....	....	..3.	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	1...	....	....	....	....	..	U07

REVISION

COPIE AI TO:
INV. REV.

UNIT K270

COMPIL. GE 425 APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 40024000

EMISS. AUG 1,1968

PIASTRA-BOARD LUSE 20 0610041 W

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
						4	12	U06
							2	U06
							1	U06
							4	U06 U08
			1	3				U07
				3				U07
			1					U07
		1						U07

REVISION

PIASTRA-BOARD LOSE 2C 0610041 W

PROVA-TEST n° 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
						4	12	U06
							2	U06
							1	U06
						4		U06 U08
			1	3				U07
				3				U07
			1					U07
		1						U07

REVISION

COPIE AD.
IND. REV.

UNIT K270

COMPIL. GE 425 APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 40024000

EMISS. AUG 1,1968

CONT. SU FO. 448 FO. 447

PIASTRA-BOARD LOSE 20 C6190A1 W

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	12	U06
....	....	....	....	....	....	....	.2	U06
....	....	....	....	....	....	....	1.	U06
....	....	....	....	....	....	...4	..	U06 U08
....	....	....	1.3.	....	....	....	..	U07
....	....	....	.3.	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	1...	....	....	....	....	..	U07

REVISION

COPIE A:
FO.
ING.
REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

CONT. SU FO. 451 FO. 448

PIASTRA-BOARD LOSE 2D 0610042 A

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	12	U06
....	....	....	....	....	....	....	.2	U06
....	....	....	....	....	....	....	1.	U06
....	....	....	....	....	1...	1.3.	..	U08
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	1...	....	..	U08
....	....	.3.	..3.	....	....	....	..	U07
....	....	....	..3.	....	....	....	..	U07
....	....	.3.	....	....	....	....	..	U07
.23.	1...	....	....	....	....	....	..	U05
....	1...	....	....	....	....	....	..	U05
..3.	....	....	....	....	....	....	..	U05
.2..	....	....	....	....	....	....	..	U05

REVISION

COPIE AD. IND. REV.

PIASTRA-BOARD FUSE 2D 0610042 A

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U06
....	....	....	....	....	....	....	1.	U06
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	1...	....	..	U08
....	....	....	..3.	....	....	....	..	U07
....	....	..3.	....	....	....	....	..	U07
....	1...	....	....	....	....	....	..	U05
..3.	....	....	....	....	....	....	..	U05
2...	....	....	....	....	....	....	..	U05

REVISION

PIASTRA-GUARD LOSE 20 0610042 A

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U06
....	....	....	....	....	....	....	1.	U06
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	1...	....	..	U08
....	....	....	..3.	....	....	....	..	U07
....	....	..3.	....	....	....	....	..	U07
....	1...	....	....	....	....	....	..	U05
..3.	....	....	....	....	....	....	..	U05
2...	....	....	....	....	....	....	..	U05

REVISION

COPIE A: TO: INV. REV.

PIASTRA-BOARD LOSE 2D 0610042 A

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	12	U06
....	....	....	....	....	....	....	.2	U06
....	....	....	....	....	....	....	1.	U06
....	....	....	....	....	....	..3.	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	1...	....	..	U08
....	....	....	..3.	....	....	....	..	U07
....	....	..3.	....	....	....	....	..	U07
....	1...	....	....	....	....	....	..	U05
..3.	....	....	....	....	....	....	..	U05
.2..	....	....	....	....	....	....	..	U05

REVISION

COPIES NO.
IND. REV.

UNIT K270

COMPIL. GE 425
EMISS. AUG 1, 1968

APPR.

SEZ. SPS - OGE
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 455 FO. 454

PIASTRA-BOARD LOSE 2D 0610042 A

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
			3					U07
		3						U07
3								U05
2								U05

PIASTRA-BOARD LOSE 2E 0610043 E

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
							12	U05
							.2	U05
							1.	U05
						2.4	..	U08
						.4	..	U08
						2..	..	U08
				2..			..	U07
			4				..	U07

PIASTRA-BOARD LOSE 2E 0610043 E

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U05
								U
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	.2..	..	U08
....	....	....	....	.2..	....	....	..	U07
....	....	....	...4	....	....	....	..	U07

PIASTRA-BOARD LOSE 2E 0610043 E

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
							2	U05
							1	U05
						4		U08
						2		U08
			4	2				U07
			2					U07
			4					U07

REVISION

COPIE A:
IND. TO:
REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEO. SPS - OGE

LOC. PREGNANA (MI)

EMISS. AUG 1,1968

N° 400240000

CONT. SU FO. 464 FO. 463

PIASTRA-GUARD LOSE ZE 0610043 E

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
• • • •	• • • •	• • • •	• • • •	• • • •	• • • •	• • • •	• 2	U05
• • • •	• • • •	• • • •	• • • •	• • • •	• • • •	• • • •	1 •	U05
• • • •	• • • •	• • • •	• • • •	• • • •	• • • •	• • • 4	• •	U08
• • • •	• • • •	• • • •	• • • •	• • • •	• • • •	• 2 • •	• •	U08
• • • •	• • • •	• • • •	• • • 4	• 2 • •	• • • •	• • • •	• •	U07
• • • •	• • • •	• • • •	• • • •	• 2 • •	• • • •	• • • •	• •	U07
• • • •	• • • •	• • • •	• • • 4	• • • •	• • • •	• • • •	• •	U07

PIASTRA-BOARD LOSE 2E 0610043 E

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••	••••	••••	••••	••••	••••	••••	•2	U05
•••	••••	••••	••••	••••	••••	••••	1•	U05
•••	••••	••••	••••	••••	••••	••4	••	U08
•••	••••	••••	••••	••••	••••	•2••	••	U08

PIASTRA-BOARD LOSE 2G 0610044 1

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U08
....	....	....	....	..34	1...	....	..	U05
....	....	....	....	....	1...	....	..	U05
....	....	....	....	...4	....	....	..	U05
....	....	....	....	..3.	....	....	..	U05
....	....	....	...4	12..	....	....	..	U07
....	....	....	....	.2..	....	....	..	U07
....	....	....	....	1...	....	....	..	U07
....	....	....	...4	....	....	....	..	U07

PIASTRA-BOARD LOSE 26 0610044 T

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U08
....	....	....	....	....	1...	....	..	U05
....	....	....	....	...4	....	....	..	U05
....	....	....	....	..3.	....	....	..	U05
....	....	....	....	.2..	....	....	..	U07
....	....	....	....	1...	....	....	..	U07
....	....	....	...4	....	....	....	..	U07

REVISION

PIASTRA-BOARD LOSE 2G U610044 1

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U08
....	....	....	....	....	1...	....	..	U05
....	....	....	....	...4	....	....	..	U05
....	....	....	....	..3.	....	....	..	U05
....	....	....	....	.2..	....	....	..	U07
....	....	....	....	1...	....	....	..	U07
....	....	....	...4	....	....	....	..	U07

REVISION

PIASTRA-BOARD LOSE 20 U610044 1

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U08
....	....	....	....	.2..	....	....	..	U07
....	....	....	....	1...	....	....	..	U07
....	....	....	...4	....	....	....	..	U07

REVISION

PIASTRA-BUARD CUSE 26 0610044 1

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U08

REVISION

COPIE A: LOI
REV.
REV.

PIASTRA-BOARD LOSE 26 0610044 1

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U08

REVISION

COPIE A:
TO:
IND. REV.

		UNIT K270	
COMPIL. GF 425	APPR.	SEZ. SEC. SPS - OGE	Nº 400240000
EMISS. AUG 1,1968		LOC. PREGNANA (MI)	CONT. SU FO. 477 FO. 476

PIASTRA-BOARD LOSE 20 0610044 1

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	Un8

PIASTRA-BOARD LUSE 20 0610044 1

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U08

REVISION

PIASTRA-BOARD LOSE 20 0610044 1

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U08

PIASTRA-BOARD LOSE 2H 0610045 X

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	....	..34	1...	....	..	U05
....	....	....	....	....	1...	....	..	U05
....	....	....	....	...4	....	....	..	U05
....	....	....	....	..3.	....	....	..	U05
....	....	....	...4	....	....	....	..	U07

REVISION

COPIE A.D.
IND. REV.

PIASTRA-BOARD LOSE 2R 0610045 A

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	1...	....	..	U05
....	....	....	....	...4	....	....	..	U05
....	....	....	....	..3.	....	....	..	U05
....	....	....	...4	....	....	....	..	U07

REVERSION

PIASTRA-BOARD LUSE 2H U610045 X

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	1...	....	..	U05
....	....	....	....	...4	....	....	..	U05
....	....	....	....	...3	....	....	..	U05
....	....	....	...4	....	....	....	..	U07

PIASTRA-BUARD LUSE 2H 0610045 X

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	Un8
....	....	....	....	....	1...	....	..	Un5
....	....	....	....	...4	....	....	..	Un5
....	....	....	....	..3.	....	....	..	Un5
....	....	....	...4	....	....	....	..	Un7

REVISION

PIASTRA-BOARD LUSE 2H 0610045 X

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	...4	....	....	....	..	U07

PIASTRA-BOARD LOSE 2H 0610045 X

PROVA-TEST = 6.

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	...4	....	....	....	..	U07

PIASTRA-BOARD LOSE 2H 0610045 X

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	...4	....	....	....	..	U07

COPIE A: TOL. REV.

REVISION

PIASTRA-BOARD LOSE 2H 0610045 X

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	••••	•••4	••	U08
••••	••••	••••	•••4	••••	••••	••••	••	U07

REVISION

COPIE A:
TO:
IND.
REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

N° 400240000

EMISS. AUG 1,1968

CONT. SU FO. 489 FO. 488

PIASTRA-BOARD LOSE 2H 0610045 X

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	..	U08
....	....	....	...4	....	....	....	..	U07

PIASTRA-BOARD LOSE 2L 0610046 B

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	...4	....	...4	.2	U06
....	....	....	....	....	....	....	.2	U06
....	....	....	....	....	....	...4	..	U06
....	....	....	....	....	1...	12..	..	U08
....	....	....	....	....	....	.2..	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	1...	....	..	U08
....	....	....	....	...4	....	....	..	U06
1.3.	....	....	...4	.2..	....	....	..	U05
....	....	....	....	.2..	....	....	..	U05
....	....	....	...4	....	....	....	..	U05
....	....	1...	12..	....	....	....	..	U07
....	....	....	.2..	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	1...	....	....	....	....	..	U07
..3.	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U05

REVISION

PIASTRA-BOARD FUSE 2L 0810046 B

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U06
....	....	....	....	....	....	...4	..	U06
....	....	....	....	....	....	.2..	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	1...	....	..	U08
....	....	....	....	..4	....	....	..	U06
....	....	....	....	-2..	....	....	..	U05
....	....	....	...4	....	....	....	..	U05
....	....	....	.2..	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	1...	....	....	....	....	..	U07
..3.	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U05

REVISION

COPIE N°
INC. REV.

PIASTRA-BOARD LOSE 2L 0610046 B

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U06
....	....	....	....	....	....	...4	..	U06
....	....	....	....	....	....	.2..	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	1...	....	..	U08
....	....	....	....	...4	....	....	..	U06
....	....	....	....	.2..	....	....	..	U05
....	....	....	...4	....	....	....	..	U05
....	....	....	.2..	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	1...	....	....	....	....	..	U07
..3.	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U05

PIASTRA-BOARD LOSE 2L 0610046 B

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U06
....	....	....	....	....	....	...4	..	U06
....	....	....	....	....	....	.2..	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	1...	....	..	U08
....	....	....	....	...4	....	....	..	U06
1.3.	....	....	...4	.2..	....	....	..	U05
....	....	....	....	.2..	....	....	..	U05
....	....	....	...4	....	....	....	..	U05
....	....	....	.2..	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	1...	....	....	....	....	..	U07
.3.	....	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U05

REVISION

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

CONT. SU FO. 497 FO. 496

PIASTRA-BOARD LOSE 2M 0610047 F

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.2..	1..4	1.	U08
....	....	....	....	....	....	....	1.	U08
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	.2..	....	..	U08
1...	1...	....	....	1.3.	....	....	..	U05
....	....	....	....	..3.	....	....	..	U05
....	....	....	....	1...	....	....	..	U05
....	.3..	..3.	23..	....	....	....	..	U07
....	....	....	..3.	....	....	....	..	U07
....	....	....	2...	....	....	....	..	U07
....	....	..3.	....	....	....	....	..	U07
....	..3.	....	....	....	....	....	..	U07
....	1...	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U05

REVISION

UNIT. K270

COMPIL. GE 425	APPR.	SEZ. SEC. SPS - OGE	Nº 400246000
EMISS. AUG 1,1968		LOC. PREGNANA (MI)	CONT. SU FO. 497 FO. 496

PIASTRA-BOARD LOSE 2M 0610047 F

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	##	
....	....	....	....	....	....	....	1.	U08
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	..2.	....	..	U08
....	....	....	....	..3.	....	....	..	U05
....	....	....	....	1...	....	....	..	U05
....	....	....	..3.	....	....	....	..	U07
....	....	....	.2..	....	....	....	..	U07
....	....	..3.	....	....	....	....	..	U07
....	..3.	....	....	....	....	....	..	U07
....	1...	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U05

PIASTRA-BOARD LUSE 2M 0610047 F

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U08
....	....	....	....	....	....	...4	..	U08
....	....	....	....	....	....	1...	..	U08
....	....	....	....	....	.2..	....	..	U08
....	....	....	....	..3.	....	....	..	U05
....	....	....	....	1...	....	....	..	U05
....	....	....	..3.	....	....	....	..	U07
....	....	....	.2..	....	....	....	..	U07
....	....	..3.	....	....	....	....	..	U07
....	..3.	....	....	....	....	....	..	U07
....	1...	....	....	....	....	....	..	U05
1...	....	....	....	....	....	....	..	U05

REVISION

PIASTRA-BOARD NONA 2A 0610048 U

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U06 U08
....	....	....	....	....	....	.2..	..	U08
1...	....	....	....	....	.2..	....	..	U06
....	....	....	....	....	.2..	....	..	U03 U06
....	....	....	....	...4	....	....	..	U05
....	....	....	..3.	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	.2..	....	....	....	....	..	U05
....	1...	....	....	....	....	....	..	U03
1...	....	....	....	....	....	....	..	U03 U06

REVISION

COPIE A:
IND.
FO:
REV.

COMPIL. GE 425	APPR.	UNIT K270	
EMISS. AUG 1,1968		SEZ. SPS - OGE SEO. LOC. PREGNANA (MI)	N° 400240000 CONT. SU FO. 502 FO. 501

PIASTRA-BOARD NUNA 2A 0610048 0

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U06 U08
....	....	....	....	....	....	2..	..	U08
1...	1...	....	....	....	2..	....	..	U03
....	....	....	....	....	2..	....	..	U03 U06
....	....	2..	....	...4	....	....	..	U05
....	....	....	....	...4	....	....	..	U05
....	....	....	1.3.	....	....	....	..	U07
....	....	....	..3.	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	2..	....	....	....	....	..	U05
....	1...	....	....	....	....	....	..	U03
1...	....	....	....	....	....	....	..	U03 U06

REVISION

COPIE A:
IND.
TO:

UNIT K270

COMPIL. GE 425 APPR. SEZ. SPS - OGE

EMISS. AUG 1,1968 LOC. PREGNANA (MI)

N° 400240000

PIASTRA-BOARD NONA 2A 0610048 U

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U06 U08
....	....	....	....	....	....	.2..	..	U08
1...	....	....	....	....	.2..	....	..	U03
....	....	....	....	....	.2..	....	..	U03 U06
....	....	....	....	...4	....	....	..	U05
....	....	....	..3.	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	2...	....	....	....	....	..	U05
....	1...	....	....	....	....	....	..	U03
1...	....	....	....	....	....	....	..	U03 U06

PIASTRA-BUARD NUNA 2A 0610048 U

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U06 U08
....	....	....	....	....	....	.2..	..	U08
1...	1...	....	....	....	.2..	....	..	U03
....	....	....	....	....	.2..	....	..	U03 U06
....	....	.2..	....	...4	....	....	..	U05
....	....	....	....	...4	....	....	..	U05
....	....	....	1.3.	....	....	....	..	U07
....	....	....	..3.	....	....	....	..	U07
....	....	....	1...	....	....	....	..	U07
....	....	.2..	....	....	....	....	..	U05
....	1...	....	....	....	....	....	..	U03
1...	....	....	....	....	....	....	..	U03 U06

REVISION

COPIE A: FO. IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

EMISS. AUG 1,1968

N° 400240000

CONT. SU FO. 506 FO. 504

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BUARD NONE 2A 0610049 Y

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	1..4	..	U01
....	....	....	....	....	....	...4	..	U01 U04 V10
....	....	....	....	....	....	..3.	..	U03 U04 V02
....	....	....	....	....	....	1...	..	U01 U04 V06
....	....	....	.2..	1..4	....	....	..	U07
....	....	....	....	...4	....	....	..	U07
....	....	....	....	1...	....	....	..	U07
....	....	....	.2..	....	....	....	..	U04 U07

REVISION

COPIE A:
IND. REV.

PIASTRA-BOARD NONE 2A 0610049 Y

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	1.34	..	U04
....	....	....	....	....	....	...4	..	U01 U04 U05 V09 V10 V11 V12
....	....	....	....	....	....	..3.	..	U03 U04 V01 V02 V03 V04
....	....	....	....	....	....	1...	..	U01 U04 U05 V05 V06 V07 V08
....	....	....	....	...4	....	....	..	U07
....	....	....	....	1...	....	....	..	U07
....	....	....	.2..	....	....	....	..	U04

REVISION

COPIE A: TO:
IND. REV.

UNIT K270

COMPIL. GE 425

APPR. AL

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

N^o 400240000

EMISS. AUG 1,1968

CONT. SU FO. 508 FO. 507

PIASTRA-BOARD NONE 2A 0610049 Y

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	1..4	..	U01
....	....	....	....	....	....	...4	..	U01 U04 V09
....	....	....	....	....	....	..3.	..	U03 U04 V01
....	....	....	....	....	....	1...	..	U01 U04 V05
....	....	....	....	...4	....	....	..	U07
....	....	....	....	1...	....	....	..	U07
....	....	....	.2..	....	....	....	..	U04 U07

REVISION

PIASTRA-BOARD NONE 2A 0610049 Y

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	.2..	....	....	1.34	..	U04 U07
....	....	....	....	....	....	...4	..	U01 U04 U05
....	....	....	....	....	....	..3.	..	U03 U04
....	....	....	....	....	....	1...	..	U01 U04 U05
....	....	....	....	...4	....	....	..	U07

PIASTRA-BOARD NONE 2A 0610049 Y

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	1..4	..	U05
....	....	....	....	....	....	...4	..	U04 U05 V11
....	....	....	....	....	....	..3.	..	U03 U04 V03
....	....	....	....	....	....	1...	..	U04 U05 V07
....	....	....	.2..	....	....	....	..	U04 U07

REVISION

COPIE A:
IND. REV. TO:

PIASTRA-BOARD NONE 2A 0610049 Y

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	.2..	....	....	1.34	..	U04 U07
....	....	....	....	....	....	1..4	..	U05
....	....	....	....	....	....	...4	..	U04 U05 V12
....	....	....	....	....	....	..3.	..	U03 U04 V04
....	....	....	....	....	....	1...	..	U04 U05 V08

REVISION

COPIE A:
IND. REV.

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD NUNI 2A 0610050 W

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	123.	..	U01 U03
....	....	....	....	....	...4	..3.	..	U05
....	....	....	....	....	....	..3.	..	U05 U08
....	....	....	....	....	....	12..	..	U07
....	....	....	....	....	....	.2..	..	U07 U08
....	....	....	....	....	....	1...	..	U07 U08
....	....	....	....	....	...4	....	..	U05 U08

PIASTRA-BOARD NUNI 2A U610050 M

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	123.	..	U01 U02 U03 U08
....	....	....	....	....	....	..3.	..	U05 U06 U08
....	....	....	....	....	....	.2..	..	U04 U07 U08
....	....	....	....	....	....	1...	..	U04 U07 U08
....	....	....	....	....	...4	....	..	U05 U06 U08

REVISION

COPIE A:
IND. TO:
REV.

PIASTRA-BOARD NONI 2A 0610050 W

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	123.	..	U01 U02 U03
....	....	....	....	....	...4	..3.	..	U06
....	....	....	....	....	....	..3.	..	U06 U08
....	....	....	....	....	....	12..	..	U04
....	....	....	....	....	....	.2..	..	U04 U08
....	....	....	....	....	....	1...	..	U04 U08
....	....	....	....	....	...4	....	..	U06 U08

REVISIONI

PIASTRA-BOARD NONI 2A U610050 W

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	···4	123·	··	U01 U02 U08
····	····	····	····	····	····	··3·	··	U06 U08
····	····	····	····	····	····	·2··	··	U04 U08
····	····	····	····	····	····	1···	··	U04 U08
····	····	····	····	····	···4	····	··	U06 U08

PIASTRA-BUARD NONI 2A 0610050 W

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	123.	..	U01 U03
....	....	....	....	....	...4	..3.	..	U05
....	....	....	....	....	....	..3.	..	U05 U08
....	....	....	....	....	....	12..	..	U07
....	....	....	....	....	....	.2..	..	U07 U08
....	....	....	....	....	....	1...	..	U07 U08
....	....	....	....	....	...4	....	..	U05 U08

COPIE AI TOT.
NO. REV.

REVISION

PIASTRA-BOARD NONI 2A U610050 W

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	123.	..	U01 U02
....	....	....	....	....	...4	..3.	..	U06
....	....	....	....	....	....	..3.	..	U06 U08
....	....	....	....	....	....	12..	..	U04
....	....	....	....	....	....	.2..	..	U04 U08
....	....	....	....	....	....	1...	..	U04 U08
....	....	....	....	....	...4	....	..	U06 U08

COPIE A:
IND. TO:
REV.

REVISION

PIASTRA-BOARD NONI 2A 0610050 W

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	...4	123.	••	U01 U02 U08
••••	••••	••••	••••	••••	••••	..3.	••	U05 U06 U08
••••	••••	••••	••••	••••	••••	.2..	••	U04 U07 U08
••••	••••	••••	••••	••••	••••	1...	••	U04 U07 U08
••••	••••	••••	••••	••••	...4	....	••	U05 U06 U08

PIASTRA-BOARD NUNI 2A 0610050 W

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	···4	123.	..	U01 U02 U08
····	····	····	····	····	····	·.3.	..	U05 U06 U08
····	····	····	····	····	····	.2..	..	U04 U07 U08
····	····	····	····	····	····	1...	..	U04 U07 U08
····	····	····	····	····	···4	····	..	U05 U06 U08

PIASTRA-GUARD NUNI 2A 0610050 W

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	123.	..	U01 U02 U03 U08
....	....	....	....	....	....	..3.	..	U05 U06 U08
....	....	....	....	....	....	.2..	..	U04 U07 U08
....	....	....	....	....	....	1...	..	U04 U07 U08
....	....	....	....	....	...4	....	..	U05 U06 U08

REVISION

COPIE A:
DOC. REV.

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1,1968

SEZ. SEC. SPS - OGE
LOC. PREGNANA (MI)

N° 400240000

CONT. SU FO. 525 FO. 524

PIASTRA-BOARD NONI 2A 0610050 W

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	123.	..	U01 U02 U03 U08
....	....	....	....	....	....	..3.	..	U05 U06 U08
....	....	....	....	....	....	.2..	..	U04 U07 U08
....	....	....	....	....	....	1...	..	U04 U07 U08
....	....	....	....	....	...4	....	..	U05 U06 U08

REVISION

PIASTRA-BUSSO URCA ZA U61UU52 B

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U14 U22 U24
....	....	....	....	....	...4	..34	1.	U17
....	....	....	....	....	....	....	1.	U13 U15 U16 U17
....	....	....	....	....	....	...4	..	U17 U19 U20
....	....	....	....	....	...4	..3.	..	U12 U17 U20
.2..	....	....	....	....	....	..3.	..	U14
....	....	....	....	....	....	..3.	..	U12 U14 U24
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U25
.2..	....	....	....	....	....	....	..	U13 U14 U23
....	....	....	....	....	...X	.XXX	XX	U16

REVISIONI

PIASTRA-BOARD ORCA 2A 0610052 B

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U22 U24
.2..	....	....	....	....	...4	..34	1.	U17
.2..	....	....	....	....	....	....	1.	U17
....	....	....	....	....	....	....	1.	U13 U16 U17
....	....	....	....	....	....	...4	..	U17 U19 U20
....	....	....	....	....	...4	..3.	..	U12 U17 U20
....	....	....	....	....	....	..3.	..	U12 U14 U24
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U25
.2..	....	....	....	....	....	....	..	U13 U14
....	....	....	....	....	...X	.XXX	XX	U16

REVISION

PIASTRA-BOARD ORCA 2A 0610U52 B

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U14 U22 U23 U24
.2..	....	....	....	....	...4	...4	1.	U17
.2..	....	....	....	....	....	....	1.	U17
....	....	....	....	....	....	....	1.	U13 U16 U17 U18
....	....	....	....	....	....	...4	..	U17 U18 U19 U20
....	....	....	....	....	....	..3.	..	U12 U14 U24
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U12 U17 U18 U20 U25
.2..	....	....	....	....	....	....	..	U13 U14 U23
....	....	....	....	....	...X	.XXX	XX	U16

COPIE A: / IND. REV.

REVISION

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE

SEC.

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

CONT. SU FO. 534 FO. 533

PIASTRA-BOARD ORCA 2A 0610092 B

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	M	
....	....	....	....	....	....	....	.2	U22 U23 U24
.2..	....	....	....	....	...4	..34	1.	U17
.2..	....	....	....	....	....	....	1.	U17
....	....	....	....	....	....	....	1.	U13 U16 U17 U18
....	....	....	....	....	....	...4	..	U17 U18 U19 U20
....	....	....	....	....	...4	..3.	..	U12 U17 U18 U20
....	....	....	....	....	....	..3.	..	U12 U24
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U25
.2..	....	....	....	....	....	....	..	U13 U14 U23
....	....	....	....	....	...X	.XX	XX	U16

PIASTRA-BOARD ORCA 2A U610052 B

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U22 U23
.2..	....	....	....	....	...4	..34	1.	U17
.2..	....	....	....	....	....	....	1.	U17
....	....	....	....	....	....	....	1.	U13 U16 U17 U18
....	....	....	....	....	....	...4	..	U17 U18 U19 U20
....	....	....	....	....	...4	..3.	..	U12 U17 U18 U20
....	....	....	....	....	....	..3.	..	U12 U24
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U25
.2..	....	....	....	....	....	....	..	U13 U14 U23
....	....	....	....	....	...X	.XXX	XX	U16

PIASTRA-BOARD ORCA 2A 0610052 B

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.2..	....	....	....	....	....	....	12	U13
.2..	....	....	....	....	....	....	.2	U13 U17 U23
....	....	....	....	....	....	....	.2	U22 U23
....	....	....	....	....	...4	..34	1.	U18
.2..	....	....	....	....	....	....	1.	U13
....	....	....	....	....	....	....	1.	U13 U16 U17 U18
....	....	....	....	....	....	...4	..	U18 U19
....	....	....	....	....	...4	..3.	..	U12 U18
....	....	....	....	....	....	..3.	..	U12
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U12 U25
.2..	....	....	....	....	....	....	..	U13 U14 U17 U23

REVISION

COPIE AU
IND. REV.

PIASTRA-BOARD ORCA 2A 0610052 B

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	.234	12	U16
....	....	....	....	....	...4	..34	12	U20
.2..	....	....	....	....	....	....	12	U13
....	....	....	....	....	....	....	12	U15 U16 U17 U20
.2..	....	....	....	....	....	....	.2	U13 U17 U23
....	....	....	....	....	....	....	.2	U22 U23
....	....	....	....	....	...4	..34	1.	U18
.2..	....	....	....	....	....	....	1.	U13
....	....	....	....	....	....	....	1.	U13 U16 U17 U18
....	....	....	....	....	....	...4	..	U15 U17 U18 U19 U20 U25
....	....	....	....	....	...4	..3.	..	U12 U15 U17 U18 U20
....	....	....	....	....	....	..3.	..	U12
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U12 U24 U25
.2..	....	....	....	....	....	....	..	U13 U14 U17 U23

REVISIONI

COPIE AL FO.
IND. REV.

PIASTRA-BOARD URCA 2A 0610652 B

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.2..	....	....	....	....	....	....	12	U13
....	....	....	....	....	....	....	12	U15 U16 U17 U20
.2..	....	....	....	....	...4	...4	.2	U17
.2..	....	....	....	....	....	....	.2	U13 U17 U23
....	....	....	....	....	....	....	.2	U22 U23
....	....	....	....	....	....	....	1.	U13 U14 U16 U17 U18 U24
....	....	....	....	....	...4	...4	..	U25
....	....	....	....	....	....	...4	..	U17 U19 U20 U25
....	....	....	....	....	....	..3.	..	U12 U24
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U12 U17 U20 U24 U25
.2..	....	....	....	....	....	....	..	U14
....	....	....	....	....	...X	.XXX	XX	U16

REVISION

PIASTRA-BOARD ORCA 2A 0610U52 B

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...4	.234	12	U16
....	....	....	....	....	....	....	12	U15 U16 U17
....	....	....	....	....	....	....	.2	U22 U23
....	....	....	....	....	...4	..34	1.	U18 U20
....	....	....	....	....	...4	....	1.	U14
.2..	....	....	....	....	....	....	1.	U13
....	....	....	....	....	....	....	1.	U13 U14 U15 U16 U17 U18 U20 U24
....	....	....	....	....	....	...4	..	U15 U17 U18 U19 U20 U25
....	....	....	....	....	...4	..3.	..	U12 U15 U17 U18 U20
....	....	....	....	....	....	..3.	..	U12
....	....	....	....	....	....	.2..	..	U21
....	....	....	....	....	...4	....	..	U12 U14 U24 U25
.2..	....	....	....	....	....	....	..	U13 U14 U17 U23
....	....	....	....	....	...X	.XXX	XX	U16

REVISION

PIASTRA-BOARD ORCA 2A 0610052 B

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	12	U15 U16 U17 U20
.2..	....	....	....	....	....	....	.2	U23
....	....	....	....	....	....	....	.2	U22 U23
.2..	....	....	....	....	....	....	1.	U14
....	....	....	....	....	....	....	1.	U13 U14 U16 U17 U18 U24
....	....	....	....	....	...4	...4	..	U17 U25
....	....	....	....	....	....	...4	..	U17 U19 U20 U25
....	....	....	....	....	....	..3.	..	U12
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U12 U17 U20 U24 U25
.2..	....	....	....	....	....	....	..	U13 U14 U23
...	....	....	....	....	...X	.XXX	XX	U16

REVISION

PIASTRA-BOARD ORCA 2A 0610052 B

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.2..	12	U16
.2..	....	....	....	....	....	....	12	U17
....	....	....	....	....	....	....	12	U15 U16 U17 U20
.2..	....	....	....	....	....	....	.2	U23
....	....	....	....	....	....	....	.2	U22 U23
.2..	....	....	....	....	....	..3.	1.	U14
....	....	....	....	....	....	....	1.	U13 U14 U16 U17 U18 U24
....	....	....	....	....	...4	..34	..	U17
....	....	....	....	....	...4	...4	..	U25
....	....	....	....	....	....	...4	..	U17 U18 U19 U20 U25
....	....	....	....	....	...4	..3.	..	U12 U17 U18 U20 U24
....	....	....	....	....	....	..3.	..	U12 U14 U24
....	....	....	....	....	....	.2..	..	U21
....	....	....	....	....	...4	....	..	U25
.2..	....	....	....	....	....	....	..	U13 U14 U23
....	....	....	....	....	...X	.XXX	XX	U16

REVISIONI

PIASTRA-BOARD ORCA 2A 0610052 B

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.2..	12	U16
.2..	....	....	....	....	....	....	12	U14 U17
....	....	....	....	....	....	....	12	U14 U15 U16 U17 U20 U24
....	....	....	....	....	....	.2..	.2	U16 U21
.2..	....	....	....	....	....	....	.2	U23
....	....	....	....	....	....	....	.2	U22 U23
....	....	....	....	....	...4	...4	1.	U18
....	....	....	....	....	....	....	1.	U13 U16 U17 U18
....	....	....	....	....	....	...4	..	U18 U19
....	....	....	....	....	....	.2..	..	U21
....	....	....	....	....	...4	....	..	U12 U17 U18 U25
.2..	....	....	....	....	....	....	..	U13 U14 U23
....	....	....	....	....	...X	.XXX	XX	U16

REVISION

COPIE AI FO. IND. REV.

UNIT K270

COMPIL. GE 425 APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 4110240000

EMISS. AUG 1,1968

PIASTRA-BUARD DRCA 2A U6100052 B

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.2..	....	....	....	....	....	....	12	U14
....	....	....	....	....	....	....	12	U14 U24
....	....	....	....	....	....	.2..	.2	U16 U21
.2..	....	....	....	....	....	....	.2	U13 U23
....	....	....	....	....	....	....	.2	U22 U23 U24
....	....	....	....	....	...4	..34	1.	U18
.2..	....	....	....	....	....	....	1.	U17
....	....	....	....	....	....	....	1.	U13 U15 U16 U17 U18 U20
....	....	....	....	....	....	...4	..	U17 U18 U19
....	....	....	....	....	...4	..3.	..	U12 U17 U18
....	....	....	....	....	....	..3.	..	U12
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U12 U25
.2..	....	....	....	....	....	....	..	U14 U23
....	....	....	....	....	...X	.XXX	XX	U16 U20

REVISION

COPIE A:
IND. REV.

PIASTRA-BOARD ORCA 2A 0610052 B

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.2..	....	....	....	....	....	.2.4	12	U16
.2..	....	....	....	....	...4	...4	12	U17
.2..	....	....	....	....	....	....	12	U15 U17 U20
....	....	....	....	....	....	....	.2	U14 U20 U22 U23 U24
....	....	....	....	....	....	....	1.	U13 U16 U17
....	....	....	....	....	....	...4	..	U15 U17 U19 U20
....	....	....	....	....	....	..3.	..	U12 U14 U24
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U12 U17 U25
.2..	....	....	....	....	....	....	..	U13 U14 U23
.X..	....	....	....	....	...X	.XXX	XX	U16 U20

REVISION

COPIE A:
TO:
IND.
INST.

PIASTRA-BOARD ORCA 2A 0610052 B

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..3.	.2	U24
....	....	....	....	....	....	....	.2	U14 U22 U24
.2..	....	....	....	....	...4	...4	1.	U17
.2..	....	....	....	....	....	....	1.	U17
....	....	....	....	....	....	....	1.	U13 U16 U17
....	....	....	....	....	....	...4	..	U17 U19
....	....	....	....	....	....	..3.	..	U12 U24
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U12 U17 U25
.2..	....	....	....	....	....	....	..	U13 U14
.X..	....	....	....	....	...X	.XXX	XX	U16 U20

REVISION

COPIE A: TO:
INV. REV.

PIASTRA-BOARD ORCA 2A 0610052 B

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..3.	.2	U24
....	....	....	....	....	....	....	.2	U14 U22 U24
.2..	....	....	....	....	...4	...4	1.	U17
.2..	....	....	....	....	....	....	1.	U17
....	....	....	....	....	....	....	1.	U13 U16 U17 U18
....	....	....	....	....	....	...4	..	U17 U18 U19
....	....	....	....	....	....	..3.	..	U12 U24
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U12 U17 U18 U25
.2..	....	....	....	....	....	....	..	U13 U14 U23

REVISION

PIASTRA-BOARD ORCA 2A 0610052 B

PROVA-TEST = 17

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.2..	....	....	....	....	...4	..34	12	U17
.2..	....	....	....	....	....	....	12	U17
....	....	....	....	....	....	.2..	.2	U16
....	....	....	....	....	....	....	.2	U14 U15 U20 U22 U23 U24
....	....	....	....	....	....	....	1.	U13 U16 U17
....	....	....	....	....	....	...4	..	U17 U19
....	....	....	....	....	...4	..3.	..	U12 U17
....	....	....	....	....	....	..3.	..	U12
....	....	....	....	....	....	.2..	..	U16 U21
....	....	....	....	....	...4	....	..	U25
.2..	....	....	....	....	....	....	..	U13 U14

REVISION

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

I^a APPLIC. GE 130

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.	.	.	.	.	.	2	1	U20 U24 U25
.	.	.	.	.	.	.	1	U25
.	.	.	.	.	.	4	0	U14 U19 U23
.	.	.	.	.	.	3	0	U13 U14
.	.	.	.	.	.	2	0	U14 U15
2	.	.	.	.	.	.	0	U14 U28

REVISION

COPIE A: FO. IND. REV.

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1, 1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

N° 400240000

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘∘	1∘	U20 U24 U25
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘	U25
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘4∘9	∘∘	U06 U07 U11 U12 U15 U16 U17 U21 U22
∘2∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘	U14 U25
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘4	∘∘	U14 U15 U19 U23
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘	U13 U18
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘2∘∘	∘∘	U15
∘2∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U14 U18 U28

REVISION

COPIE N.
IND. REV.

UNIT 5270

COMPIL. GE 133

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 4002A0000

EMISS. AUG 31 1968

CONT. SU FO. 553 FO. 552

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	••••	•234	1•	U20 U24 U25
••••	••••	••••	••••	••••	••••	•2•4	1•	U20 U24 U25
••••	••••	••••	••••	••••	••••	•••4	1•	U25
••••	••••	••••	••••	••••	••••	•••4	••	U14 U19 U23 U25
••••	••••	••••	••••	••••	••••	•23•	••	U06 U07 U11 U12 U15 U16 U17 U21 U22
••••	••••	••••	••••	••••	••••	••3•	••	U13 U14 U18
••••	••••	••••	••••	••••	••••	•2••	••	U06 U07 U11 U12 U16 U17 U21 U22
•2••	••••	••••	••••	••••	••••	••••	••	U18 U26

REVISION

COPIE A: TOL. REV.

UNIT K270

COMPIL. GE 425	APPR.	SEZ. SEC. SPS - OGE	Nº 480240000
EMISS. AUG 1,1966		LOC. PREGNANA (MI)	CONT. SU FO. 554 FO. 553

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	····	·2··	1·	U25
····	····	····	····	····	····	····	1·	U20 U24 U25
····	····	····	····	····	····	·2·4	··	U06 U07 U11 U12 U15 U16 U17 U21 U22
····	····	····	····	····	····	···4	··	U14 U23
····	····	····	····	····	····	··3·	··	U13
····	····	····	····	····	····	·2··	··	U15
·2··	····	····	····	····	····	····	··	U14 U28

REVISION

COPIES

IND. REV.

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.	.	.	.	.	.	2	1	U25
.	.	.	.	.	.	.	1	U20 U24 U25
.	.	.	.	.	.	2	4	U06 U07 U11 U12 U15 U16 U17 U21 U22
2	.	.	.	.	.	.	4	U14
.	.	.	.	.	.	.	4	U14 U23
.	.	.	.	.	.	3	.	U13
.	.	.	.	.	.	2	.	U15
2	.	.	.	.	.	.	.	U14 U18 U25 U28

COPIE AL TOT.
INCL. REV.

REVISION

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘23∘	1∘	U25
∘2∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘	U25
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	1∘	U24 U24 U25
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘23∘	∘∘	U06 U07 U11 U12 U15 U16 U17 U21 U22
∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘3∘	∘∘	U13 U18
∘2∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘∘∘	∘∘	U14 U25 U28

COPIE A: TO:

IND. REV.

REVISION

COMPIL. GE 425	APPR.	UNIT K270	
EMISS. AUG 1 1968		SEZ. SEC. SPS - OGE	N° 400240000
		LOC. PREGNANA (MI)	CONT. SU FO. 557 FO. 556

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•2••	••••	••••	••••	••••	••••	••••	1•	U25
••••	••••	••••	••••	••••	••••	••••	1•	U20 U24 U25
••••	••••	••••	••••	••••	••••	••34	••	U06 U07 U21 U22
••••	••••	••••	••••	••••	••••	•••4	••	U06 U07 U11 U12 U14 U15 U16 U17 U22 U23
••••	••••	••••	••••	••••	••••	•23•	••	U15 U25
••••	••••	••••	••••	••••	••••	••3•	••	U06 U07 U11 U12 U13 U15 U16 U17 U18 U21 U22
•2••	••••	••••	••••	••••	••••	••••	••	U14 U18 U25 U28

COPIE A:
TO:
IND.
REV.

REVISION

UNIT K270

COMPIL. GE 425

EMISS. AUG 1,1968

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 406240000

CONT. SU FO. 558 FO. 557

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	••••	•2••	1•	U20
••••	••••	••••	••••	••••	••••	••••	1•	U25
••••	••••	••••	••••	••••	••••	•234	••	U15
••••	••••	••••	••••	••••	••••	•2•4	••	U14
••••	••••	••••	••••	••••	••••	•••4	••	U06 U07 U11 U12 U15 U16 U17 U19 U22 U23
••••	••••	••••	••••	••••	••••	•23•	••	U15
••••	••••	••••	••••	••••	••••	••3•	••	U06 U07 U11 U12 U13 U15 U16 U17 U18 U21 U22 U25
••••	••••	••••	••••	••••	••••	•2••	••	U15
•2••	••••	••••	••••	••••	••••	••••	••	U28

REVISION

COPIE A:
TO:
REV.
REV.

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

I^a APPLIC. GE 130

CONT. SU FO. 560 FO. 559

PIASTRA-BOARD RECE 2A U610058 V

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
						2	1	U20 U25
							1	U25
						234		U06 U07 U21
						24		U06 U07 U11 U12 U14 U15 U16 U17
						4		U19 U23
						3		U06 U07 U11 U12 U13 U15 U16 U17 U18 U21 U22 U25
						2		U15 U25
2								U18 U28

COPIE A: FO.

IND. REV.

REVISION

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE

SEG.

LOC. PREGNANA (MI)

EMISS. AUG. 1, 1968

N° 400240000

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	••••	•23•	1•	U20 U25
••••	••••	••••	••••	••••	••••	•2••	1•	U20
••••	••••	••••	••••	••••	••••	••••	1•	U25
••••	••••	••••	••••	••••	••••	•234	••	U06 U07 U11 U12 U14 U15 U16 U17 U21
••••	••••	••••	••••	••••	••••	•2•4	••	U06 U07 U21
••••	••••	••••	••••	••••	••••	•••4	••	U19 U23
••••	••••	••••	••••	••••	••••	•23•	••	U15
••••	••••	••••	••••	••••	••••	••3•	••	U13 U14 U18
•2••	••••	••••	••••	••••	••••	••••	••	U18 U28

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.23.	1.	U20 U25
....	....	....	....	....	....	.2..	1.	U20
....	....	....	....	....	....	...4	1.	U25
....	....	....	....	....	....	.234	..	U06 U07 U11 U12 U14 U15 U16 U17 U21
....	....	....	....	....	....	.2.4	..	U06 U07 U21
....	....	....	....	....	....	...4	..	U19 U23
....	....	....	....	....	....	.23.	..	U15
....	....	....	....	....	....	..3.	..	U13 U14 U18
.2..	....	....	....	....	....	....	..	U18 U28

REVISION

COPIE A: CD: IND. REC.

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1,1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 140

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	····	··2··	1·	U20 U25
····	····	····	····	····	····	····	1·	U25
····	····	····	····	····	····	··2·4	··	U06 U07 U11 U12 U15 U16 U17 U21 U22
····	····	····	····	····	····	···4	··	U14 U15 U19 U23 U25
····	····	····	····	····	····	··3·	··	U13 U14
····	····	····	····	····	····	··2··	··	U15
··2·	····	····	····	····	····	····	··	U14 U28

REVISION

COPIE A: FO. INC. REV.

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1, 1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••	•••	•••	•••	•••	•••	•2.4	1•	U28 U24 U25
•••	•••	•••	•••	•••	•••	•2••	1•	U25
•••	•••	•••	•••	•••	•••	•••	1•	U25
•••	•••	•••	•••	•••	•••	•••4	••	U23
•••	•••	•••	•••	•••	•••	••3•	••	U13
•••	•••	•••	•••	•••	•••	•2••	••	U06 U07 U11 U12 U14 U15 U16 U17 U21 U25
•2••	•••	•••	•••	•••	•••	•••	••	U18 U28

REVISION

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	••••	•2.4	1•	U20 U24 U25
••••	••••	••••	••••	••••	••••	••••	1•	U25
••••	••••	••••	••••	••••	••••	•••4	••	U19 U23
••••	••••	••••	••••	••••	••••	••3•	••	U13 U18
••••	••••	••••	••••	••••	••••	•2••	••	U06 U07 U11 U12 U14 U15 U16 U17 U21
•2••	••••	••••	••••	••••	••••	••••	••	U18 U28

REVISION

COPIE A:
IND.
INST.

UNIT K270

COMPIL. GE 425 APPR.

SEZ. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

CONT. SU FO. 565 FO. 564

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.2..	....	....	....	....	....	.2..	1.	U25
....	....	....	....	....	....	.2..	1.	U20 U24
....	....	....	....	....	....	....	1.	U25
....	....	....	....	....	....	...4	..	U14 U19 U23
....	....	....	....	....	....	..3.	..	U13
....	....	....	....	....	....	.2..	..	U14 U15
.2..	....	....	....	....	....	....	..	U14 U18 U28

REVISION

COPIE A: TO:
IND. REV.

PIASTRA-BOARD RECE 2A 0610058 V

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	••••	•2••	1•	U25
••••	••••	••••	••••	••••	••••	••••	1•	U25
••••	••••	••••	••••	••••	••••	•••1	••	U19 U23
••••	••••	••••	••••	••••	••••	••3•	••	U13
••••	••••	••••	••••	••••	••••	•2••	••	U06 U07 U11 U12 U14 U15 U16 U17 U21 U22 U25
2•••	••••	••••	••••	••••	••••	••••	••	U28

PIASTRA-GUARD REGE 2A 0610056 V

PROVA-TEST = 17

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.2..	1.	U25
....	....	....	....	....	....	....	1.	U25
....	....	....	....	....	....	...4	..	U19 U23
....	....	....	....	....	....	..3.	..	U13
....	....	....	....	....	....	.2..	..	U06 U07 U11 U12 U14 U15 U16 U17 U21 U22 U25
.2..	....	....	....	....	....	....	..	U28

REVISION

PIASTRA-BOARD REGO 2A 0610060 X

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.234	1.	U24
....	....	....	....	....	....	...4	1.	U14 U15
....	....	....	....	....	....	....	1.	U14 U15 U25
....	....	....	....	....	....	...4	..	U14 U15 U20
....	....	....	....	....	....	.23.	..	U13 U14
....	....	....	....	....	....	..3.	..	U13 U14 U18
....	....	....	....	....	....	.2..	..	U13 U14 U23
....	....	....	....	....	.234	1...	..	U19 U24
....	....	....	....	....	....	1...	..	U17 U19 U23
....	....	....	....	....	...4	....	..	U17 U18 U19
....	....	....	....	....	..3.	....	..	U12 U19 U20
....	....	....	....	....	.2..	....	..	U12 U19 U25

REVISION

PIASTRA-BOARD REGO 2A 0610060 X

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.234	1.	U24
....	....	....	....	....	....	...4	1.	U14 U15
....	....	....	....	....	....	....	1.	U14 U15 U25
....	....	....	....	....	....	...4	..	U14 U15 U20
....	....	....	....	....	....	.23.	..	U13 U14
....	....	....	....	....	....	..3.	..	U13 U14 U18
....	....	....	....	....	....	.2..	..	U13 U14 U23
....	....	....	....	....	.234	1...	..	U19 U24
....	....	....	....	....	...4	1...	..	U16
....	....	....	....	....	....	1...	..	U16 U17 U19 U23
....	....	....	....	....	...4	....	..	U16 U17 U18 U19
....	....	....	....	....	.23.	....	..	U11
....	....	....	....	....	..3.	....	..	U11 U12 U19 U20
....	....	....	....	....	.2..	....	..	U11 U12 U19 U25

REVISION

PIASTRA-BOARD REGO 2A 0610060 X

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	1234	1.	U24
....	....	....	....	....	....	.234	1.	U24
....	....	....	....	....	.23.	...4	1.	U11
....	....	....	....	....	.2..	....	1.	U11 U12 U25
....	....	....	....	....	....	....	1.	U14 U15 U25
....	....	....	....	....	..3.	...4	..	U11 U12 U20
....	....	....	....	....	....	...4	..	U14 U15 U20
....	....	....	....	....	...4	123.	..	U16
....	....	....	....	....	...4	..3.	..	U16 U17 U18
....	....	....	....	....	....	..3.	..	U13 U14 U18
....	....	....	....	....	....	12..	..	U16 U17 U23
....	....	....	....	....	....	.2..	..	U13 U14 U23
....	....	....	....	....	.234	1...	..	U19
....	....	....	....	....	....	1...	..	U19
....	....	....	....	....	...4	....	..	U19
....	....	....	....	....	..3.	....	..	U19
....	....	....	....	....	.2..	....	..	U19

REVISION

COPIE A:
TO:
IND. REV.

PIASTRA-BOARD REGO 2A 0610060 X

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	•234	1234	1•	U24
••••	••••	••••	••••	••••	•23•	...4	1•	U11
••••	••••	••••	••••	••••	•2••	••••	1•	U11 U12 U25
••••	••••	••••	••••	••••	••••	••••	1•	U14 U15 U25
••••	••••	••••	••••	••••	••3•	...4	••	U11 U12 U20
••••	••••	••••	••••	••••	••••	...4	••	U14 U15 U20
••••	••••	••••	••••	••••	...4	123•	••	U16
••••	••••	••••	••••	••••	...4	..3•	••	U16 U17 U18
••••	••••	••••	••••	••••	••••	..3•	••	U13 U14 U18
••••	••••	••••	••••	••••	••••	12••	••	U16 U17 U23
••••	••••	••••	••••	••••	••••	•2••	••	U13 U14 U23
••••	••••	••••	••••	••••	•234	1•••	••	U19
••••	••••	••••	••••	••••	••••	1•••	••	U19
••••	••••	••••	••••	••••	...4	••••	••	U19
••••	••••	••••	••••	••••	••3•	••••	••	U19
••••	••••	••••	••••	••••	•2••	••••	••	U19

REVISION

PIASTRA-BOARD REGO 2A 0610060 X

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	•234	1234	1•	U24
••••	••••	••••	••••	••••	••••	•••4	1•	U14 U15
••••	••••	••••	••••	••••	•2••	••••	1•	U25
••••	••••	••••	••••	••••	••••	••••	1•	U14 U15
••••	••••	••••	••••	••••	••3•	•••4	••	U20
••••	••••	••••	••••	••••	••••	•••4	••	U14 U15
••••	••••	••••	••••	••••	••••	•23•	••	U13 U14
••••	••••	••••	••••	••••	••••4	••3•	••	U18
••••	••••	••••	••••	••••	••••	••3•	••	U13 U14
••••	••••	••••	••••	••••	••••	12••	••	U23
••••	••••	••••	••••	••••	••••	•2••	••	U13 U14
••••	••••	••••	••••	••••	•••4	1•••	••	U17
••••	••••	••••	••••	••••	••••	1•••	••	U16 U17 U19 U23
••••	••••	••••	••••	••••	•••4	••••	••	U16 U17 U18 U19
••••	••••	••••	••••	••••	•23•	••••	••	U12
••••	••••	••••	••••	••••	••3•	••••	••	U11 U12 U19 U20
••••	••••	••••	••••	••••	•2••	••••	••	U11 U12 U19 U25

REVISION

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

N° APPLIC. GE 130

PIASTRA-BOARD REGO 2A 0610060 X

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	.234	1234	1.	U24
••••	••••	••••	••••	••••	••••	...4	1.	U14 U15
••••	••••	••••	••••	••••	.2..	••••	1.	U25
••••	••••	••••	••••	••••	••••	••••	1.	U14 U15
••••	••••	••••	••••	••••	..3.	...4	..	U20
••••	••••	••••	••••	••••	••••	...4	..	U14 U15
••••	••••	••••	••••	••••	••••	.23.	..	U13 U14
••••	••••	••••	••••	••••	...4	..3.	..	U18
••••	••••	••••	••••	••••	••••	..3.	..	U13 U14
••••	••••	••••	••••	••••	••••	12..	..	U23
••••	••••	••••	••••	••••	••••	.2..	..	U13 U14
••••	••••	••••	••••	••••	••••	1...	..	U19 U22 U23
••••	••••	••••	••••	••••	...4	••••	..	U18 U19 U22
••••	••••	••••	••••	••••	..3.	••••	..	U19 U20 U24
••••	••••	••••	••••	••••	.2..	••••	..	U19 U24 U25

REVISION

CONFIG. N°

IND. REV.

UNIT K270

COMPIL. GE 423

APPR. 2d

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

N° 400240000

EMISS. AUG 1,1968

PIASTRA-BOARD REGO 2A 0610060 X

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	1234	1.	U24
....	....	....	....	....	....	...4	1.	U14 U15
....	....	....	....	....	.2..	....	1.	U25
....	....	....	....	....	....	....	1.	U14 U15
....	....	....	....	....	..3.	...4	..	U20
....	....	....	....	....	....	...4	..	U14 U15
....	....	....	....	....	....	.23.	..	U13 U14
....	....	....	....	....	...4	..3.	..	U18
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	....	12..	..	U23
....	....	....	....	....	....	.2..	..	U13 U14
....	....	....	....	....	...4	1...	..	U17
....	....	....	....	....	....	1...	..	U16 U17 U19 U23
....	....	....	....	....	...4	....	..	U16 U17 U18 U19
....	....	....	....	....	.23.	....	..	U12
....	....	....	....	....	..3.	....	..	U11 U12 U19 U20
....	....	....	....	....	.2..	....	..	U11 U12 U19 U25

REVISION

COPIE A: TOI: IND. REV.

PIASTRA-BOARD REGO 2A 0610060 X

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	1234	1.	U24
....	....	....	....	....	.23.	...4	1.	U12
....	....	....	....	....	....	...4	1.	U14 U15
....	....	....	....	....	.2..	....	1.	U11 U12 U24 U25
....	....	....	....	....	....	....	1.	U14 U15
....	....	....	....	....	..3.	...4	..	U11 U12 U20 U24
....	....	....	....	....	....	...4	..	U14 U15
....	....	....	....	....	...4	123.	..	U17
....	....	....	....	....	....	.23.	..	U13 U14
....	....	....	....	....	...4	..3.	..	U16 U17 U18 U22
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	....	12..	..	U16 U17 U22 U23
....	....	....	....	....	....	.2..	..	U13 U14
....	....	....	....	....	....	1...	..	U19 U23
....	....	....	....	....	...4	....	..	U18 U19
....	....	....	....	....	..3.	....	..	U19 U20
....	....	....	....	....	.2..	....	..	U19 U25

REVISION

COPIE N.
INV.
REV.

PIASTRA-BOARD REGO 2A 0610060 X

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	1234	1.	U24
....	....	....	....	....	....	.234	1.	U24
....	....	....	....	....	....	...4	1.	U14 U15
....	....	....	....	....	.2..	....	1.	U25
....	....	....	....	....	....	....	1.	U14 U15
....	....	....	....	....	..3.	...4	..	U20
....	....	....	....	....	....	...4	..	U14 U15
....	....	....	....	....	....	.23.	..	U13 U14
....	....	....	....	....	...4	..3.	..	U18
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	....	12..	..	U23
....	....	....	....	....	....	.2..	..	U13 U14
....	....	....	....	....	.234	1...	..	U24
....	....	....	....	....	....	1...	..	U19 U22 U23
....	....	....	....	....	...4	....	..	U18 U19 U22
....	....	....	....	....	..3.	....	..	U19 U20 U24
....	....	....	....	....	.2..	....	..	U19 U24 U25

REVISIONI

COPIE A FO.
IND. REV.

UNIT K270

COMPIL. GE 429 APPR.

EMISS. AUG 1,1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 580 FO. 579

PIASTRA-BOARD REGO 2A 0610060 X

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.234	1.	U24
....	....	....	....	....	.2..	....	1.	U24 U25
....	....	....	....	....	....	....	1.	U14 U15 U25
....	....	....	....	....	..3.	...4	..	U20 U24
....	....	....	....	....	....	...4	..	U14 U15 U20
....	....	....	....	....	...4	123.	..	U22
....	....	....	....	....	...4	..3.	..	U18 U22
....	....	....	....	....	....	..3.	..	U13 U14 U18
....	....	....	....	....	....	12..	..	U22 U23
....	....	....	....	....	....	.2..	..	U13 U14 U23
....	....	....	....	....	.234	1...	..	U19
....	....	....	....	....	....	1...	..	U19
....	....	....	....	....	...4	....	..	U19
....	....	....	....	....	..3.	....	..	U19
....	....	....	....	....	.2..	....	..	U19

REVISION

COPIE AL TOL. NO REV.

PIASTRA-BOARD REGO 2A 0610060 X

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	1234	1.	U24
....	....	....	....	....	....	...4	1.	U14 U15
....	....	....	....	....	.2..	....	1.	U25
....	....	....	....	....	...3	....	1.	U14 U15
....	....	....	....	....	..3.	...4	..	U20
....	....	....	....	....	....	...4	..	U14 U15
....	....	....	....	....	....	.23.	..	U13 U14
....	....	....	....	....	...4	..3.	..	U18
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	....	12..	..	U23
....	....	....	....	....	....	.2..	..	U13 U14
....	....	....	....	....	....	1...	..	U19 U23
....	....	....	....	....	...4	....	..	U18 U19
....	....	....	....	....	..3.	....	..	U19 U20
....	....	....	....	....	.2..	....	..	U19 U25

REVISION

COPIE A:
TO:
REV.

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

PIASTRA-BOARD REGO 2A 0610060 X

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.234	1.	U24
....	....	....	....	....	....	...4	1.	U14 U15
....	....	....	....	....	....	....	1.	U14 U15 U25
....	....	....	....	....	....	...4	..	U14 U15 U20
....	....	....	....	....	....	.23.	..	U13 U14
....	....	....	....	....	....	..3.	..	U13 U14 U18
....	....	....	....	....	....	.2..	..	U13 U14 U23
....	....	....	....	....	.234	1...	..	U19 U24
....	....	....	....	....	...4	1...	..	U16
....	....	....	....	....	....	1...	..	U16 U17 U19 U23
....	....	....	....	....	...4	....	..	U16 U17 U18 U19
....	....	....	....	....	.23.	....	..	U11
....	....	....	....	....	..3.	....	..	U11 U12 U19 U20
....	....	....	....	....	.2..	....	..	U11 U12 U19 U25

REVISION

COPIE A:
IND.
REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD REG8 2A 0610061 Y

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1234	12..	.2..	...4	...4	1...	1234	12	U23
....	....	....	....	....	....	..34	12	U19
....	....	....	....	....	....	..3.	.2	U19
....	....	....	....	....	....	....	.2	U25
....	....	....	....	....	....	...4	1.	U19
....	....	....	....	....	....	....	1.	U20
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U25
....	....	....	....	...4	....	.2..	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	1...	1...	..	U18
....	....	....	....	....	....	1...	..	U13
....	....	....	....	....	1...	....	..	U13
....	....	....	....	...4	....	....	..	U23 U24
1.3.	....	.2..	...4	....	....	....	..	U17
....	....	.2..	...4	....	....	....	..	U17
....	....	....	...4	....	....	....	..	U12
....	....	.2..	....	....	....	....	..	U12
.2.4	12..	....	....	....	....	....	..	U22
...4	.2..	....	....	....	....	....	..	U22
....	.2..	....	....	....	....	....	..	U21
.2..	1...	....	....	....	....	....	..	U22
....	1...	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U21
1.3.	....	....	....	....	....	....	..	U17
..3.	....	....	....	....	....	....	..	U11
.2..	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U11
XXXX	XX..	.X..	...X	...X	X...	XXXX	XX	U18

REVISION

PIASTRA-BOARD REG8 2A 0610061 Y

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	.C	D	E	F	G	H	
1234	12..	.2..	...4	...4	1...	1234	12	U23
....	....	....	....	....	....	..34	12	U19
....	....	....	....	....	....	..3.	.2	U19 U25
....	....	....	....	....	....	....	.2	U25
....	....	....	....	....	....	...4	1.	U19 U20
....	....	....	....	....	....	....	1.	U20
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U25
....	....	....	....	...4	....	.2..	..	U23 U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	1...	1...	..	U13 U18
....	....	....	....	....	....	1...	..	U13
....	....	....	....	....	1...	....	..	U13
....	....	....	....	...4	....	....	..	U23 U24
1.3.	....	.2..	...4	....	....	....	..	U17
....	....	.2..	...4	....	....	....	..	U12 U17
....	....	....	...4	....	....	....	..	U12
....	....	.2..	....	....	....	....	..	U12
.2.4	12..	....	....	....	....	....	..	U22
...4	.2..	....	....	....	....	....	..	U21 U22
....	.2..	....	....	....	....	....	..	U21
.2..	1...	....	....	....	....	....	..	U16 U22
....	1...	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U21
1.3.	....	....	....	....	....	....	..	U11 U17
.3.	....	....	....	....	....	....	..	U11
.2..	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U11
XXXX	XX..	.X..	...X	...X	X...	XXXX	XX	U18

PIASTRA-BOARD REG8 2A 0610061 Y

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1234	12..	.2..	...4	...4	1...	1234	12	U18 U23
....	....	....	....	....	....	..34	12	U19
....	....	....	....	....	....	..3.	.2	U19 U25
....	....	....	....	....	....	....	.2	U25
....	....	....	....	....	....	...4	1.	U19 U20
....	....	....	....	....	....	....	1.	U20
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U25
....	....	....	....	...4	....	.2..	..	U23 U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	1...	1...	..	U13 U18
....	....	....	....	....	....	1...	..	U13
....	....	....	....	....	1...	....	..	U13
....	....	....	....	...4	....	....	..	U23 U24
1.3.	....	.2..	...4	....	....	....	..	U17
....	....	.2..	...4	....	....	....	..	U12 U17
....	....	....	...4	....	....	....	..	U12
....	....	.2..	....	....	....	....	..	U12
.2.4	12..	....	....	....	....	....	..	U22
...4	.2..	....	....	....	....	....	..	U21 U22
....	.2..	....	....	....	....	....	..	U21
.2..	1...	....	....	....	....	....	..	U16 U22
....	1...	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U21
1.3.	....	....	....	....	....	....	..	U11 U17
..3.	....	....	....	....	....	....	..	U11
.2..	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U11
XXXX	XX..	.X..	...X	...X	X...	XXXX	XX	U18

REVISION

PIASTRA-BOARD REG8 2A 0610061 Y

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1234	12..	.2..	...4	...4	1...	1234	12	U18
....	....	....	....	....	....	..3.	.2	U19
....	....	....	....	....	....	....	.2	U25
....	....	....	....	....	....	...4	1.	U19
....	....	....	....	....	....	....	1.	U20
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U25
....	....	....	....	...4	....	.2..	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	1...	1...	..	U18
....	....	....	....	....	1...	1...	..	U13
....	....	....	....	....	1...	....	..	U13
....	....	....	....	...4	....	....	..	U23
....	....	.2..	...4	....	....	....	..	U17
....	....	....	...4	....	....	....	..	U12
....	....	.2..	....	....	....	....	..	U12
...4	.2..	....	....	....	....	....	..	U22
....	.2..	....	....	....	....	....	..	U21
.2..	1...	....	....	....	....	....	..	U22
....	1...	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U21
1.3.	....	....	....	....	....	....	..	U17
..3.	....	....	....	....	....	....	..	U11
.2..	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U11
XXXX	XX..	.X..	...X	...X	X...	XXXX	XX	U18

PIASTRA-BOARD REG8 2A 0610061 Y

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1234	12--	·2··	···4	···4	1···	1234	12	U18
····	····	····	····	····	····	···3	·2	U19 U25
····	····	····	····	····	····	····	·2	U25
····	····	····	····	····	····	···4	1·	U19 U20
····	····	····	····	····	····	····	1·	U20
····	····	····	····	····	····	···4	··	U20
····	····	····	····	····	····	···3	··	U25
····	····	····	····	···4	····	·2··	··	U23 U24
····	····	····	····	····	····	·2··	··	U23 U24
····	····	····	····	····	1···	1···	··	U13 U18
····	····	····	····	····	····	1···	··	U13
····	····	····	····	····	1···	····	··	U13
····	····	····	····	···4	····	····	··	U23
····	····	·2··	···4	····	····	····	··	U12 U17
····	····	····	···4	····	····	····	··	U12
····	····	·2··	····	····	····	····	··	U12
···4	·2··	····	····	····	····	····	··	U21 U22
····	·2··	····	····	····	····	····	··	U21
·2··	1···	····	····	····	····	····	··	U16 U22
····	1···	····	····	····	····	····	··	U16
···4	····	····	····	····	····	····	··	U21
1·3·	····	····	····	····	····	····	··	U11 U17
··3·	····	····	····	····	····	····	··	U11
·2··	····	····	····	····	····	····	··	U16
1···	····	····	····	····	····	····	··	U11
XXXX	XX..	.X..	...X	...X	X...	XXXX	XX	U18

REVISION

PIASTRA-BOARD REG8 2A 0610061 Y

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1234	12..	.2..	...4	...4	1...	1234	12	U18 U23
1234	12..	.2..	...4	....	1...	1234	12	U23
....	....	....	....	....	....	...3.	.2	U19 U25
....	....	....	....	....	....	....	.2	U25
....	....	....	....	....	....	...4	1.	U19 U20
....	....	....	....	....	....	....	1.	U20
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	...3.	..	U25
....	....	....	....	...4	....	.2..	..	U23 U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	1...	1...	..	U13 U18
....	....	....	....	....	....	1...	..	U13
....	....	....	....	....	1...	....	..	U13
....	....	....	....	...4	....	....	..	U23
....	....	2..	...4	....	....	....	..	U12 U17
....	....	....	...4	....	....	....	..	U12
....	....	2..	....	....	....	....	..	U12
...4	.2..	....	....	....	....	....	..	U21 U22
....	.2..	....	....	....	....	....	..	U21
.2..	1...	....	....	....	....	....	..	U16 U22
....	1...	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U21
1.3.	....	....	....	....	....	....	..	U11 U17
..3.	....	....	....	....	....	....	..	U11
.2..	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U11
XXXX	XX..	.X..	...X	...X	X...	XXXX	XX	U18

REVISION

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

PIASTRA-BOARD REG8 2A 0610061 Y

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE – FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1234	12..	.2..	...4	...4	1...	1234	12	U23
....	....	....	....	....	....	..34	12	U19
....	....	....	....	....	....	...3	.2	U19
....	....	....	....	....	....	....	.2	U25
....	....	....	....	....	....	...4	1.	U19
....	....	....	....	....	....	....	1.	U20
....	....	....	....	....	....	...4	..	U20
....	....	....	....	....	....	..3.	..	U25
....	....	....	....	...4	....	.2..	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	1...	1...	..	U18
....	....	....	....	....	....	1...	..	U13
....	....	....	....	....	1...	....	..	U13
....	....	....	....	...4	....	....	..	U23 U24
1.3.	....	.2..	...4	....	....	....	..	U17
....	....	.2..	...4	....	....	....	..	U17
....	....	....	...4	....	....	....	..	U12
....	....	.2..	....	....	....	....	..	U12
.2.4	12..	....	....	....	....	....	..	U22
...4	.2..	....	....	....	....	....	..	U22
....	.2..	....	....	....	....	....	..	U21
.2..	1...	....	....	....	....	....	..	U22
....	1...	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U21
1.3.	....	....	....	....	....	....	..	U17
..3.	....	....	....	....	....	....	..	U11
.2..	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U11
XXXX	XX..	.X..	...X	...X	X...	XXXX	XX	U18

REVISION

COPIE A: TO:
IND. REV.

COMPIL. GE 425
EMISS. AUG 1 1968

APPR.

UNIT K270
SEZ. SPS - OGE
SEO.
LOC. PREGNANA (MI)

Nº 400240000

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD REGU 2A 0610062 C

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	..34	1234	12	U25
....	....	....	....	....	....	....	12	U20 U24
....	....	....	....	....	....	....	.2	U20 U24
....	....	....	....	....	....	....	1.	U20 U24
....	....	....	....	....	..3.	...4	..	U18 U19
....	....	....	....	....	....	...4	..	U18 U19
....	....	....	....	....	....	1.3.	..	U13 U14
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	...4	.2..	..	U08 U09
....	....	....	....	....	....	.2..	..	U08 U09
....	....	....	....	....	....	1...	..	U13 U14
....	....	....	....	....	...4	....	..	U08 U09
....	....	....	....	....	..3.	....	..	U18 U19
.23.	123.	..3.	....	.2.4	1...	....	..	U21
....	....	..3.	....	....	1...	....	..	U22 U23
....	1...	....	....	...4	1...	....	..	U22 U23
....	....	....	....	...4	....	....	..	U16 U17
....	....	....	....	...4	....	....	..	U16 U17
..3.	....	....	....	.2..	....	....	..	U11 U12
....	....	....	....	.2..	....	....	..	U11 U12
....	....	..3.	....	....	....	....	..	U22 U23
1...	..3.	....	....	....	....	....	..	U01 U03
....	..3.	....	....	....	....	....	..	U01 U03
.2..	.2..	....	....	....	....	....	..	U06 U07
....	.2..	....	....	....	....	....	..	U06 U07
....	1...	....	....	....	....	....	..	U16 U17
..3.	....	....	....	....	....	....	..	U11 U12
.2..	....	....	....	....	....	....	..	U06 U07
1...	....	....	....	....	....	....	..	U01 U03
X...	....	....	....	....	..XX	XXXX	XX	U25
.XX.	XXX.	..X.	....	.X.X	X...	....	..	U21

REVISION

PIASTRA-BOARD REGU 2A 0610062 C

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	..34	1234	12	U25
...	....	....	....	....	....	....	12	U20 U24
...	....	....	....	....	....	....	.2	U20 U24
...	....	....	....	....	....	....	1.	U20 U24
...	....	....	....	....	..3.	...4	..	U18 U19
...	....	....	....	....	....	...4	..	U18 U19
...	....	....	....	....	....	1.3.	..	U13 U14
...	....	....	....	....	....	..3.	..	U13 U14
...	....	....	....	....	...4	.2..	..	U08 U09
...	....	....	....	....	....	.2..	..	U08 U09
...	....	....	....	....	....	1...	..	U13 U14
...	....	....	....	....	...4	....	..	U08 U09
...	....	....	....	....	..3.	....	..	U18 U19
.23.	123.	..3.	....	.2.4	1...	....	..	U21
...	....	..3.	....	....	1...	....	..	U22 U23
...	....	....	....	....	1...	....	..	U22 U23
...	1...	....	....	...4	....	....	..	U16 U17
...	....	....	....	...4	....	....	..	U16 U17
.3.	....	....	....	.2..	....	....	..	U11 U12
...	....	....	....	.2..	....	....	..	U11 U12
...	....	.3.	....	....	....	....	..	U22 U23
1...	..3.	....	....	....	....	....	..	U01 U03
...	..3.	....	....	....	....	....	..	U01 U03
.2..	.2..	....	....	....	....	....	..	U06 U07
...	.2..	....	....	....	....	....	..	U06 U07
...	1...	....	....	....	....	....	..	U16 U17
.3.	....	....	....	....	....	....	..	U11 U12
.2..	....	....	....	....	....	....	..	U06 U07
1...	....	....	....	....	....	....	..	U01 U03
X...	....	....	....	....	..XX	XXXX	XX	U25
.XX.	XXX.	..X.	....	.X.X	X...	....	..	U21

PIASTRA-BOARD REGU ZA 0610062 C

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	..34	1234	12	U25
...	....	....	....	....	....	....	12	U20 U24
....	....	....	....	....	....	....	.2	U20 U24
....	....	....	....	....	....	....	1.	U20 U24
....	....	....	....	....	.3.	...4	..	U18 U19
....	....	....	....	....	....	...4	..	U18 U19
....	....	....	....	....	....	1.3.	..	U13 U14
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	..4	.2..	..	U08 U09
....	....	....	....	....	....	.2..	..	U08 U09
....	....	....	....	....	....	1...	..	U13 U14
....	....	....	....	....	...4	....	..	U08 U09
....	....	....	....	....	..3.	....	..	U18 U19
.23.	123.	..3.	....	.2.4	1...	....	..	U21
....	....	..3.	....	....	1...	....	..	U22 U23
....	....	....	....	....	1...	....	..	U22 U23
....	1...	....	....	...4	....	....	..	U16 U17
....	....	....	....	...4	....	....	..	U16 U17
..3.	....	....	....	.2..	....	....	..	U11 U12
....	....	....	....	.2..	....	....	..	U11 U12
....	....	..3.	....	....	....	....	..	U22 U23
1...	..3.	....	....	....	....	....	..	U01 U03
....	..3.	....	....	....	....	....	..	U01 U03
.2..	.2..	....	....	....	....	....	..	U06 U07
....	.2..	....	....	....	....	....	..	U06 U07
....	1...	....	....	....	....	....	..	U16 U17
..3.	....	....	....	....	....	....	..	U11 U12
.2..	....	....	....	....	....	....	..	U06 U07
1...	....	....	....	....	....	....	..	U01 U03
X...	....	....	....	....	..XX	XXXX	XX	U25
.XX.	XXX.	..X.	....	.X.X	X...	....	..	U21

REVISION

COPIE N.
INDICE REV.

PIASTRA-GUARD REGU 2A 0610062 C

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	..34	1234	12	U25
....	....	....	....	....	....	....	.2	U20 U24
....	....	....	....	....	....	....	1.	U20 U24
....	....	....	....	....	....	...4	..	U18 U19
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	....	.2..	..	U08 U09
....	....	....	....	....	....	1...	..	U13 U14
....	....	....	....	....	...4	....	..	U08 U09
....	....	....	....	....	..3.	....	..	U18 U19
....	....	....	....	....	....	....	..	U21
.23.	123.	..3.	....	.2.4	1...	....	..	U22 U23
....	....	....	....	....	1...	....	..	U16 U17
....	....	....	....	...4	....	....	..	U11 U12
....	....	....	....	.2..	....	....	..	U22 U23
....	....	..3.	....	....	....	....	..	U01 U03
....	..3.	....	....	....	....	....	..	U06 U07
....	.2..	....	....	....	....	....	..	U16 U17
....	1...	....	....	....	....	....	..	U11 U12
..3.	....	....	....	....	....	....	..	U06 U07
.2..	....	....	....	....	....	....	..	U01 U03
1...	....	....	....	....	....	....	..	
X...	....	....	....	....	..XX	XXXX	XX	U25
.XX.	XXX.	..X.	....	.X.X	X...	....	..	U21

REVISION

PIASTRA-BOARD REGU 2A 0610062 C

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	..34	1234	12	U25
....	....	....	....	....	....	....	.2	U20 U24
....	....	....	....	...1	....	....	1.	U20 U24
....	....	....	....	....	....	...4	..	U18 U19
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	....	.2..	..	U08 U09
....	....	....	....	....	....	1...	..	U13 U14
....	....	....	....	....	...4	....	..	U08 U09
....	....	....	....	....	..3.	....	..	U18 U19
.23.	123.	..3.	....	.2.4	1...	....	..	U21
....	....	....	....	....	1...	....	..	U22 U23
....	....	....	....	...4	....	....	..	U16 U17
....	....	....	....	.2..	....	....	..	U11 U12
....	....	..3.	....	....	....	....	..	U22 U23
....	..3.	....	....	....	....	....	..	U01 U03
....	.2..	....	....	....	....	....	..	U06 U07
....	1...	....	....	....	....	....	..	U16 U17
..3.	....	....	....	....	....	....	..	U11 U12
.2..	....	....	....	....	....	....	..	U06 U07
1...	....	....	....	....	....	....	..	U01 U03
X...	....	....	....	....	..XX	XXXX	XX	U25
.XX.	XXX.	..X.	....	.X.X	X...	....	..	U21

PIASTRA-BOARD REGU 2A 0610062 C

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	..34	1234	12	U25
....	....	....	....	....	....	....	.2	U20 U24
....	....	....	....	....	....	....	1.	U20 U24
....	....	....	....	....	....	...4	..	U18 U19
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	....	.2..	..	U08 U09
....	....	....	....	....	....	1...	..	U13 U14
....	....	....	....	....	...4	....	..	U08 U09
....	....	....	....	....	..3.	....	..	U18 U19
.23.	123.	..3.	....	.2.4	1...	....	..	U21
....	....	....	....	....	1...	....	..	U22 U23
....	....	....	....	...4	....	....	..	U16 U17
....	....	....	....	.2..	....	....	..	U11 U12
....	....	..3.	....	....	....	....	..	U22 U23
....	..3.	....	....	....	....	....	..	U01 U03
....	.2..	....	....	....	....	....	..	U06 U07
....	1...	....	....	....	....	....	..	U16 U17
..3.	....	....	....	....	....	....	..	U11 U12
.2..	....	....	....	....	....	....	..	U06 U07
1...	....	....	....	....	....	....	..	U01 U03
X...	....	....	....	....	..XX	XXXX	XX	U25
.XX.	XXX.	..X.	....	.X.X	X...	....	..	U21

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD RENO 2A 0610064 V

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	...4	....	..34	12	U18 U23
....	....	....	....	....	....	..3.	.2	U14
....	....	....	....	....	....	....	.2	U13 U14
....	....	....	....	....	....	...4	1.	U12
....	....	....	....	....	....	....	1.	U12 U13
....	....	....	....	....	....	...4	..	U12 U13
....	....	....	....	....	....	..3.	..	U13 U14
....	1...	....	....	....	.23.	.2..	..	U18 U28
....	....	....	....	....	.2..	.2..	..	U25 U29
....	....	....	....	....	....	.2..	..	U08 U25 U29 U30
....	1...	....	....	....	..3.	....	..	U22 U27
....	....	....	....	....	..3.	....	..	U07 U22 U26 U27
....	....	....	....	....	.2..	....	..	U07 U25 U29 U30
....	1...	....	....	....	....	....	..	U07 U22 U26 U27
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

REVISION

COPIE A: IND. REV.

PIASTRA-BOARD RENO 2A 0610064 V

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	...4	....	..34	12	U18 U23
....	....	....	....	....	....	..3.	.2	U14
....	....	....	....	....	....	....	.2	U13 U14
....	....	....	....	....	....	...4	1.	U12
....	....	....	....	....	....	....	1.	U12 U13
....	....	....	....	....	....	...4	..	U12 U13
....	....	....	....	....	....	..3.	..	U13 U14
....	1...	....	....	....	.23.	.2..	..	U18 U28
....	....	....	....	....	.2..	.2..	..	U24 U29
....	....	....	....	....	....	.2..	..	U08 U24 U29 U30
....	1...	....	....	....	..3.	....	..	U21 U27
....	....	....	....	....	..3.	....	..	U07 U21 U26 U27
....	....	....	....	....	.2..	....	..	U07 U24 U29 U30
....	1...	....	....	....	....	....	..	U07 U21 U26 U27
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

PIASTRA-BOARD RENO 2A 0610064 V

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	1...	....	....	...4	.23.	.234	12	U23
....	....	....	....	...4	....	..34	12	U18
....	....	....	....	....	....	..3.	.2	U14
....	....	....	....	....	....	....	.2	U13 U14
....	....	....	....	....	....	...4	1.	U12
....	....	....	....	....	....	....	1.	U12 U13
....	....	....	....	....	....	...4	..	U12 U13
....	....	....	....	....	....	..3.	..	U13 U14
....	1...	....	....	....	.23.	.2..	..	U18 U23
....	....	....	....	....	.2..	.2..	..	U15 U19
....	....	....	....	....	....	.2..	..	U08 U09 U15 U19
....	1...	....	....	....	..3.	....	..	U11 U16
....	....	....	....	....	..3.	....	..	U07 U11 U16 U17
....	....	....	....	....	.2..	....	..	U07 U09 U15 U19
....	1...	....	....	....	....	....	..	U07 U11 U16 U17
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

REVISION

PIASTRA-BOARD RENO 2A 0610064 V

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	1...	....	....	...4	.23.	.234	12	U18 U23
....	....	....	....	....	.2..	.23.	.2	U14
....	....	....	....	....	....	.2..	.2	U09 U14
....	....	....	....	....	....	....	.2	U13
....	1...	....	....	....	..3.	...4	1.	U12
....	....	....	....	....	..3.	....	1.	U12 U17
....	....	....	....	....	....	....	1.	U13
....	1...	....	....	....	....	...4	..	U12 U17
....	....	....	....	....	....	...4	..	U13
....	....	....	....	....	.2..	..3.	..	U09 U14
....	....	....	....	....	....	..3.	..	U13
....	....	....	....	....	.2..	.2..	..	U19
....	....	....	....	....	....	.2..	..	U08 U19
....	1...	....	....	....	..3.	....	..	U16
....	....	....	....	....	..3.	....	..	U07 U16
....	....	....	....	....	.2..	....	..	U07 U19
....	1...	....	....	....	....	....	..	U07 U16
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

REVISION

COPIE A:
TO:
IND. REV.

PIASTRA-BOARD RENO 2A 0610064 V

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	...4	....	..34	12	U18 U23
....	....	....	....	....	....	..3.	.2	U14
....	....	....	....	...1	....	....	.2	U09 U13 U14
....	....	....	....	....	....	...4	1.	U12
....	....	....	....	....	....	....	1.	U12 U13 U17
....	....	....	....	...1	....	...4	..	U12 U13 U17
....	....	....	....	....	....	..3.	..	U09 U13 U14
....	....	....	....	....	....	.2..	..	U08 U19 U29
....	1...	....	....	....	-23.	....	..	U07
....	....	....	....	....	..3.	....	..	U07 U16 U27
....	....	....	....	....	-2..	....	..	U07 U19 U29
....	1...	....	....	....	....	....	..	U07 U16 U27
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

REVISION

COPIE A:
TO:
IND. REV.

PIASTRA-BOARD RENO 2A 0610064 V

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	.2	U13 U23
....	....	....	....	....	....	....	.2	U13 U14
....	1...	....	....	...4	.23.	.2..	1.	U23
....	....	....	....	...1	....	....	1.	U12 U18
....	....	....	....	....	....	....	1.	U13
....	....	....	....	....	....	..4.	..	U12 U13
....	....	....	....	....	....	..3.	..	U13 U14
....	1...	....	....	....	.23.	.2..	..	U18 U23
....	1...	....	....	....	.2..	.2..	..	U23
....	....	....	....	....	.2..	.2..	..	U15 U19
....	....	....	....	....	....	.2..	..	U08 U09 U15 U19
....	1...	....	....	....	..3.	....	..	U11 U16
....	....	....	....	....	..3.	....	..	U07 U11 U16 U17
....	....	....	....	....	.2..	....	..	U07 U09 U15 U19
....	....	....	....	...4	....	....	..	U08
....	1...	....	....	....	....	....	..	U07 U11 U16 U17
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

PIASTRA-BOARD RENO 2A 0610064 V

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..3.	12	U13 U23
....	....	....	....	....	....	....	.2	U13 U14
....	....	....	....	....	....	....	1.	U12 U13
....	....	....	....	...4	....	...4	..	U12 U18 U23
....	....	....	....	....	....	...4	..	U13
....	....	....	....	....	....	..3.	..	U13 U14
....	1...	....	....	....	.23.	.2..	..	U18 U28
....	....	....	....	....	.23.	.2..	..	U28
....	....	....	....	....	.2..	.2..	..	U24 U29
....	....	....	....	....	....	.2..	..	U08 U24 U29 U30
....	1...	....	....	....	..3.	....	..	U21 U27
....	....	....	....	....	..3.	....	..	U07 U21 U26 U27
....	....	....	....	....	.2..	....	..	U07 U24 U29 U30
....	....	....	....	...4	....	....	..	U08
....	1...	....	....	....	....	....	..	U07 U21 U26 U27
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

PIASTRA-BOARD RENO 2A 0610064 V

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	12	U13 U23
....	....	....	....	....	....	....	.2	U13 U14
....	....	....	....	....	....	....	1.	U12 U13
....	....	....	....	....	....	...4	..	U12 U13
....	....	....	....	...4	....	..3.	..	U14 U18 U23
....	....	....	....	....	....	..3.	..	U13
....	1...	....	....	....	.23.	.2..	..	U18 U28
....	1...	....	....	....	..3.	.2..	..	U28
....	....	....	....	....	.2..	.2..	..	U25 U29
....	....	....	....	....	....	.2..	..	U08 U25 U29 U30
....	1...	....	....	....	..3.	....	..	U22 U27
....	....	....	....	....	..3.	....	..	U07 U22 U26 U27
....	....	....	....	....	.2..	....	..	U07 U25 U29 U30
....	....	....	....	...4	....	....	..	U08
....	1...	....	....	....	....	....	..	U07 U22 U26 U27
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

COPIE A: / TO: / IND. / REG.

REVISION

PIASTRA-BOARD RENO 2A 0610064 V

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	...4	....	....	.2	U14 U18 U23
....	....	....	....	....	....	....	.2	U13
....	....	....	....	....	....	..34	1.	U13 U23
....	....	....	....	....	....	....	1.	U12 U13
....	....	....	....	....	....	...4	..	U12 U13
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	....	.2..	..	U08 U19 U29
....	1...	....	....	....	.23.	....	..	U07
....	....	....	....	....	..3.	....	..	U07 U16 U27
....	....	....	....	....	.2..	....	..	U07 U19 U29
....	....	....	....	...4	....	....	..	U08
....	1...	....	....	....	....	....	..	U07 U16 U27
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

REVISION

COPIE AI FO.
IND. REV.

PIASTRA-BOARD RENO 2A 0610064 V

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	1...	....	....	...4	.23.	.234	12	U23
....	....	....	....	....	....	..34	12	U13
....	....	....	....	...4	....	.2..	.2	U14
....	....	....	....	....	....	....	.2	U13
....	....	....	....	...4	..3.	....	1.	U12
....	....	....	....	....	....	....	1.	U13
....	1...	....	....	...4	....	...4	..	U12
....	....	....	....	....	....	...4	..	U13
....	....	....	....	...4	.2..	..3.	..	U14
....	....	....	....	....	....	..3.	..	U13
....	1...	....	....	....	.23.	.2..	..	U23 U28
....	....	....	....	....	.2..	.2..	..	U09 U30
....	....	....	....	...4	....	.2..	..	U08
....	....	....	....	....	....	.2..	..	U08 U09 U15 U19 U24 U25 U29 U30
....	1...	....	....	....	.23.	....	..	U07
....	1...	....	....	....	..3.	....	..	U17 U26
....	....	....	....	....	..3.	....	..	U07 U11 U16 U17 U21 U22 U26 U27
....	....	....	....	....	.2..	....	..	U07 U09 U15 U19 U24 U25 U29 U30
....	....	....	....	...4	....	....	..	U08
....	1...	....	....	....	....	....	..	U07 U11 U16 U17 U21 U22 U26 U27
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

REVISION

PIASTRA-BOARD REND 2A 0610064 V

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	...4	....	..34	12	U23
....	....	....	....	....	....	..34	12	U13
....	....	....	....	...4	....	..3.	.2	U09
....	....	....	....	...4	....	....	.2	U09 U14
....	....	....	....	....	....	....	.2	U13
....	....	....	....	...4	....	...4	1.	U17
....	....	....	....	...4	....	....	1.	U12 U17
....	....	....	....	....	....	....	1.	U13
....	....	....	....	...4	....	...4	..	U12 U17
....	....	....	....	....	....	...4	..	U13
....	....	....	....	...4	....	..3.	..	U09 U14
....	....	....	....	....	....	..3.	..	U13
....	....	....	....	....	....	.2..	..	U08
....	....	....	....	....	.3..	....	..	U07
....	....	....	....	....	2...	....	..	U07
....	....	....	....	...4	....	....	..	U08
....	1...	....	....	....	....	....	..	U07
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

REVISION

COPIE A:
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

CONT. SU FO. 617 FO. 616

PIASTRA-BOARD RENO 2A 0610064 V

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	1...	....	....	...4	.23.	.234	12	U18 U23 U28
....	....	....	....	....	....	..34	12	U13
....	....	....	....	...4	.2..	.23.	.2	U09
....	....	....	....	...4	....	.2..	.2	U09 U14
....	....	....	....	....	....	....	.2	U13
....	1...	....	....	...4	..3.	...4	1.	U17
....	....	....	....	...4	..3.	....	1.	U12 U17
....	....	....	....	....	....	....	1.	U13
....	1...	....	....	...4	....	...4	..	U12 U17
....	....	....	....	....	....	...4	..	U13
....	....	....	....	...4	.2..	..3.	..	U09 U14
....	....	....	....	....	....	..3.	..	U13
....	1...	....	....	....	.23.	.2..	..	U18 U23 U28
....	....	....	....	....	.2..	.2..	..	U30
....	....	....	....	...4	....	.2..	..	U08
....	....	....	....	....	....	.2..	..	U08 U09 U15 U19 U24 U25 U29 U30
....	1...	....	....	....	.23.	....	..	U07
....	1...	....	....	....	..3.	....	..	U26
....	....	....	....	....	..3.	....	..	U07 U11 U16 U17 U21 U22 U26 U27
....	....	....	....	....	.2..	....	..	U07 U09 U15 U19 U24 U25 U29 U30
....	....	....	....	...4	....	....	..	U08
....	1...	....	....	....	....	....	..	U07 U11 U16 U17 U21 U22 U26 U27
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

PIASTRA-BOARD RENO 2A 0610064 V

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	...4	....	..34	12	U18 U23
....	....	....	....	....	....	..3.	.2	U14
....	....	....	....	....	....	....	.2	U13 U14
....	....	....	....	....	....	...4	1.	U12
....	....	....	....	....	....	....	1.	U12 U13
....	....	....	....	....	....	...4	..	U12 U13
....	....	....	....	....	....	..3.	..	U13 U14
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

COPIE AI FOL.

IND. REV.

REVISION

COMPIL. GE 425	APPR.	UNIT K270	
EMISS. AUG 1.1968		SEZ. SPS - OGE SEC. LOC. PREGNANA (MI)	Nº 400240000 CONT. SU FO. 619 FO. 618

PIASTRA-BOARD RENO 2A 0610064 V

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	1...	....	....	...4	.23.	.234	12	U23
....	....	....	....	....	....	..34	12	U13
....	....	....	....	...4	....	.2..	.2	U14
....	....	....	....	....	....	....	.2	U13
....	....	....	....	...4	..3.	....	1.	U12
....	....	....	....	....	....	....	1.	U13
....	1...	....	....	...4	....	...4	..	U12
....	....	....	....	....	....	...4	..	U13
....	....	....	....	...4	.2..	..3.	..	U14
....	....	....	....	....	....	..3.	..	U13
....	1...	....	....	....	.23.	.2..	..	U23 U28
....	....	....	....	....	.2..	.2..	..	U09 U23 U30
....	....	....	....	...4	....	.2..	..	U08
....	....	....	....	....	....	.2..	..	U08 U09 U15 U19 U24 U25 U29 U30
....	1...	....	....	....	.23.	....	..	U07
....	1...	....	....	....	..3.	....	..	U17 U26
....	....	....	....	....	..3.	....	..	U07 U11 U16 U17 U21 U22 U26 U27
....	....	....	....	....	.2..	....	..	U07 U09 U15 U19 U24 U25 U28 U29 U30
....	....	....	....	...4	....	....	..	U08
....	1...	....	....	....	....	....	..	U07 U11 U16 U17 U21 U22 U26 U27
....	X...	....	....	...X	.XX.	.XXX	XX	U23 U28

REVISION

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD REPA 2A 0610065 Z

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	...4	12	U08
....	....	....	....	....	....	....	.2	U08 U09 U30
....	....	....	....	....	....	....	1.	U08 U09 U30
....	....	....	....	....	....	...4	..	U07 U08 U26
...4	.234	....	....	....	1..4	.23.	..	U18
....	....	....	....	....	....	.23.	..	U25
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U20
....	....	....	....	....	1..4	....	..	U24
....	....	....	....	....	...4	....	..	U29
....	....	....	....	....	..3.	....	..	U07 U08 U26
....	....	....	....	....	1...	....	..	U29
....	..34	....	....	....	....	....	..	U22
....	...4	....	....	....	....	....	..	U27
....	.3.	....	....	....	....	....	..	U27
...4	.2..	....	....	....	....	....	..	U21
....	.2..	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U17 U18
X..X	.XXX	....	....	....	X.XX	.XXX	XX	U23 U28

REVISION

COPIE AI FO.
IND. REV.

UNIT K27U

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

N° 400240000

EMISS. AUG 1,1968

PIASTRA-BOARD REPA 2A 0610065 Z

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	...3	...4	12	U18
....	....	....	....	....	....	...4	12	U23
....	....	....	....	....	....	....	12	U09 U15
....	....	....	....	....	....	....	.2	U08 U09 U10 U15
....	....	....	....	....	....	....	1.	U08 U09 U10 U15
....	....	....	....	....	..3.	...4	..	U07 U13
....	....	....	....	....	....	...4	..	U07 U08 U11 U13
...4	.234	....	....	....	1..4	.23.	..	U18
....	....	....	....	....	....	.23.	..	U20 U25
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U20
....	....	....	....	....	1..4	....	..	U24 U29
....	....	....	....	....	...4	....	..	U29
....	....	....	....	....	..3.	....	..	U07 U08 U11 U13
....	....	....	....	....	1...	....	..	U29
....	.34	....	....	....	....	....	..	U22 U27
....	...4	....	....	....	....	....	..	U27
....	.3.	....	....	....	....	....	..	U27
...4	.2..	....	....	....	....	....	..	U16 U21
....	.2..	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U17 U18
X..X	.XXX	....	....	....	X.XX	.XXX	XX	U23 U28

REVISION

COPIE AI
IND. LOG.
REV.

COMPIL GE 429

APPR.

UNIT K270

EEZ. SPS - OGE
SEC. LOG. PREGNANA (MI)

EMISS. AUG 1,1968

Nº 400240000

CONT. SU FO. 628 FO. 627

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

PIASTRA-BOARD REPA 2A 0610065 Z

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1...	....	....	....	....	..3.	...4	12	U18 U28
....	....	....	....	....	....	....	12	U30
....	....	....	....	....	....	.23.	.2	U25
....	....	....	....	....	....	....	.2	U08 U20 U25 U30
....	....	....	....	....	1..4	....	1.	U24
....	....	....	....	....	....	....	1.	U08 U24 U29 U30
....	....	....	....	....	..3.	...4	..	U26
...4	.2..	....	....	....	....	...4	..	U21
....	....	....	....	....	....	...4	..	U08 U16 U21 U26
...4	.234	....	....	....	1..4	.23.	..	U18 U28
....	....	....	....	....	....	.23.	..	U20 U25
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U20
....	....	....	....	....	1..4	....	..	U24 U29
....	....	....	....	....	...4	....	..	U29
....	..34	....	....	....	..3.	....	..	U22
....	....	....	....	....	..3.	....	..	U08 U22 U26 U27
....	....	....	....	....	1...	....	..	U29
....	..34	....	....	....	....	....	..	U22 U27
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U27
...4	.2..	....	....	....	....	....	..	U16 U21
....	.2..	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U17
X...X	.XXX	....	....	....	X.XX	.XXX	XX	U23 U28

REVISION

CONFIG. DO

INIZ. MOD.

UNIT K270

COMPIL. GE 425

APPR. Al

SEZ. SPS - OGE

SEC.

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1.1968

PIASTRA-BOARD REPA 2A 0610065 Z

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...4	.234	....	....	....	1.34	.234	12	U18 U28
....	....	....	....	....	....	....	12	U30
....	....	....	....	....	....	.23.	.2	U20 U25
....	....	....	....	....	....	....	.2	U08 U30
....	....	....	....	....	1..4	....	1.	U24 U29
....	....	....	....	....	....	....	1.	U08 U30
....	....	....	....	....	..3.	...4	..	U26
...4	.2..	....	....	....	....	...4	..	U16 U21
....	....	....	....	....	....	...4	..	U08 U26
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U20
....	....	....	....	....	...4	....	..	U29
....	..34	....	....	....	..3.	....	..	U22 U27
....	....	....	....	....	..3.	....	..	U08 U26
....	....	....	....	....	1...	....	..	U29
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U27
....	.2..	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U17 U18 U28
X..X	.XXX	....	....	....	X.XX	.XXX	XX	U23 U28

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

CONT. SU FO. 631 FO. 631

PIASTRA-BOARD REPA 2A 0610065 Z

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	...4	12	U18 U23
....	....	....	....	....	....	...4	12	U23
....	....	....	....	....	....	....	12	U09 U14
....	....	....	....	....	....	....	.2	U08 U09 U10 U14
....	....	....	....	....	....	....	1.	U08 U09 U10 U14
....	....	....	....	....	..3.	...4	..	U07 U12
....	....	....	....	....	....	...4	..	U07 U08 U11 U12
...4	.234	....	....	....	1..4	.23.	..	U18 U28
....	....	....	....	....	....	.23.	..	U20 U25
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U20
....	....	....	....	....	1..4	....	..	U24 U29
....	....	....	....	....	...4	....	..	U29
....	....	....	....	....	..3.	....	..	U07 U08 U11 U12
....	....	....	....	....	1...	....	..	U29
....	..34	....	....	....	....	....	..	U22 U27
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U27
...4	.2..	....	....	....	....	....	..	U16 U21
....	.2..	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U17 U21 U22 U24
								U25 U28
X..X	.XXX	....	....	....	X.XX	.XXX	XX	U23 U28

REVISION

COPIE AG. REG. REV.

UNIT K270

COMPIL. GE 429 APPR.

EMISS. AUG 1,1968

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 40024000

CONT. SU FO. 631 FO. 630

PIASTRA-BOARD REPA 2A 0610065 Z

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	...4	12	U18 U23
....	....	....	....	....	....	...4	12	U23
....	....	....	....	....	....	....	12	U09 U15
....	....	....	....	....	..3.	...4	.2	U23
....	....	....	....	....	....	....	.2	U08 U09 U10 U15
....	....	....	....	....	....	....	1.	U08 U09 U10 U15
....	....	....	....	....	..3.	...4	..	U07 U13
....	....	....	....	....	....	...4	..	U07 U08 U11 U13
...4	.234	....	....	....	1..4	.23.	..	U18 U28
...4	.234	....	....	....	....	.23.	..	U28
....	....	....	....	....	....	.23.	..	U20 U25
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U20
1...	....	....	....	....	1..4	....	..	U24
....	....	....	....	....	1..4	....	..	U24 U29
....	....	....	....	....	....	...4	..	U29
....	....	....	....	....	..3.	....	..	U07 U08 U11 U13
....	....	....	....	....	1...	....	..	U29
....	..34	....	....	....	....	....	..	U22 U27
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U27
...4	.2..	....	....	....	....	....	..	U16 U21
....	.2..	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U17 U18 U24
X..X	.XXX	....	....	....	X.XX	.XXX	XX	U23 U28

REVISIONI

PIASTRA-BOARD REPA 2A 0610065 Z

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1..4	.234	....	....	....	1.34	.234	12	U28
...4	.234	....	....	....	1.34	.234	12	U28
1...	....	....	....	....	..3.	...4	12	U28
....	....	....	....	....	..3.	...4	12	U08 U23
....	....	....	....	....	....	....	12	U10
....	....	....	....	....	.23.	.2..	.2	U25
....	....	....	....	....	....	..3.	.2	U20
....	....	....	....	....	....	.2..	.2	U20
1...	....	....	....	....	....	....	.2	U25
....	....	....	....	....	....	....	.2	U08 U09 U10 U14 U15 U20 U30
....	....	....	....	....	1..4	....	1.	U24
....	....	....	....	....	...4	....	1.	U29
....	....	....	....	....	1...	....	1.	U29
1...	....	....	....	....	....	....	1.	U24
....	....	....	....	....	....	....	1.	U08 U09 U10 U14 U15 U29 U30
....	....	....	....	....	..3.	...4	..	U11
...4	.2..	....	....	....	....	...4	..	U21
....	.2..	....	....	....	....	...4	..	U16
...4	....	....	....	....	....	...4	..	U16
1...	....	....	....	....	....	...4	..	U21
....	....	....	....	....	....	...4	..	U07 U08 U11 U12 U13 U16 U26
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U20
....	....	....	....	....	...4	....	..	U29
....	..34	....	....	....	..3.	....	..	U22
....	...4	....	....	....	..3.	....	..	U27
....	..3.	....	....	....	..3.	....	..	U27
1...	....	....	....	....	..3.	....	..	U22
....	....	....	....	....	..3.	....	..	U07 U08 U11 U12 U13 U23 U26 U27
....	....	....	....	....	1...	....	..	U29
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U27
....	.2..	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U17
X..X	.XXX	....	....	....	X.XX	.XXX	XX	U23 - U28

CODE AI
INV. REV.
TO

REVISION

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

N° 4002400

EMISS. AUG 1.1968

CONT. SU FO. 633 FO. 632

PIASTRA-BOARD REPA 2A 0610065 Z

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1..4	.234	....	....	....	1.34	.234	12	U28
...4	.234	....	....	....	1.34	.234	12	U28
1...	....	....	....	....	..3.	...4	12	U28
....	....	....	....	....	..3.	...4	12	U08 U23
....	....	....	....	....	....	....	12	U10
....	....	....	....	....	....	.23.	.2	U20 U25
1...	....	....	....	....	....	.2..	.2	U20
1...	....	....	....	....	....	....	.2	U20 U25
....	....	....	....	....	....	....	.2	U08 U09 U10 U14 U15 U30
....	....	....	....	....	1..4	....	1.	U24 U29
1...	....	....	....	....	1...	....	1.	U29
1...	....	....	....	....	....	....	1.	U24 U29
....	....	....	....	....	....	....	1.	U08 U09 U10 U14 U15 U30
....	....	....	....	....	..3.	...4	..	U11
...4	.2..	....	....	....	....	...4	..	U16 U21
1..4	....	....	....	....	....	...4	..	U16
1...	....	....	....	....	....	...4	..	U16 U21
....	....	....	....	....	....	...4	..	U07 U08 U11 U12 U13 U26
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U20
....	....	....	....	....	...4	....	..	U29
....	..34	....	....	....	..3.	....	..	U22 U27
1...	..3.	....	....	....	..3.	....	..	U27
1...	....	....	....	....	..3.	....	..	U22 U27
....	....	....	....	....	..3.	....	..	U07 U08 U11 U12 U13 U23 U26
....	....	....	....	....	1...	....	..	U29
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U27
....	.2..	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U17
X..X	.XXX	....	....	....	X.XX	.XXX	XX	U23 U28

REVISION

PIASTRA-BOARD REPA 2A 0610065 Z

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
1..4	.234	....	....	....	1.34	.234	12	U18 U28
...4	.234	....	....	....	1.34	.234	12	U18 U28
1...	....	....	....	....	..3.	...4	12	U18 U28
....	....	....	....	....	..3.	...4	12	U08 U18 U23
....	....	....	....	....	....	....	12	U10
....	....	....	....	....	....	.23.	.2	U20 U25
1...	....	....	....	....	....	.2..	.2	U20
1...	....	....	....	....	....	....	.2	U20 U25
....	....	....	....	....	....	....	.2	U08 U09 U10 U14 U15 U30
....	....	....	....	....	1..4	....	1.	U24 U29
1...	....	....	....	....	1...	....	1.	U29
1...	....	....	....	....	....	....	1.	U24 U29
....	....	....	....	....	....	....	1.	U08 U09 U10 U14 U15 U30
....	....	....	....	....	..3.	...4	..	U11
...4	.2..	....	....	....	....	...4	..	U16 U21
1..4	....	....	....	....	....	...4	..	U16
1...	....	....	....	....	....	...4	..	U16 U21
....	....	....	....	....	....	...4	..	U07 U08 U11 U12 U13 U26
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U20
....	....	....	....	....	...4	....	..	U29
....	..34	....	....	....	..3.	....	..	U22 U27
1...	..3.	....	....	....	..3.	....	..	U27
1...	....	....	....	....	..3.	....	..	U22 U27
....	....	....	....	....	..3.	....	..	U07 U08 U11 U12 U13 U23 U26
....	....	....	....	....	1...	....	..	U29
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U27
....	.2..	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U17
X..X	.XXX	....	....	....	X.XX	.XXX	XX	U23 U28

REVISION

COPIE A:
NO. REV.

PIASTRA-BOARD REPA 2A 0610065 Z

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	....	.2	U23
....	....	....	....	....	....	....	.2	U08 U09 U10 U14 U18 U23
....	....	....	....	....	..3.	...4	1.	U08 U23
....	....	....	....	....	....	....	1.	U08 U09 U10 U14
....	....	....	....	....	..3.	...4	..	U11
....	....	....	....	....	....	...4	..	U07 U08 U11 U12
1...	....	....	....	....	....	.23.	..	U25
....	....	....	....	....	....	.23.	..	U18 U25 U28
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U20
...4	.234	....	....	....	1..4	....	..	U28
....	....	....	....	....	1..4	....	..	U24
....	....	....	....	....	...4	....	..	U29
....	....	....	....	....	..3.	....	..	U07 U08 U11 U12
....	....	....	....	....	1...	....	..	U29
....	.34	....	....	....	....	....	..	U22
....	...4	....	....	....	....	....	..	U27
....	.3.	....	....	....	....	....	..	U27
...4	.2..	....	....	....	....	....	..	U21
....	.2..	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U17 U18 U25
X..X	.XXX	....	....	....	X.XX	.XXX	XX	U23 U28

PIASTRA-BOARD REPA 2A 0610065 Z

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	....	12	U08 U23 U10
....	....	....	....	....	....	....	12	
....	....	....	....	....	....	....	.2	U08 U09 U10 U15
....	....	....	....	....	....	....	1.	U08 U09 U10 U15
....	....	....	....	....	..3.	...4	..	U23
....	....	....	....	....	....	...4	..	U07 U08 U11 U13 U18 U23
....	..34	....	....	....	1..4	.23.	..	U28
....	....	....	....	....	....	.23.	..	U25
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U20
....	....	....	....	....	1..4	....	..	U24
....	....	....	....	....	...4	....	..	U29
....	....	....	....	....	..3.	....	..	U07 U08 U11 U13
....	....	....	....	....	1...	....	..	U29
....	..34	....	....	....	....	....	..	U22
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U27
1..4	.2..	....	....	....	....	....	..	U21
...4	.2..	....	....	....	....	....	..	U18 U21 U28
....	.2..	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U17 U18 U21
X..X	.XXX	....	....	....	X.XX	.XXX	XX	U23 U28

PIASTRA-BOARD REPA 2A 0610065 Z

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...4	.2..	....	....	....	1..4	.234	12	U28
....	....	....	....	....	....	...4	12	U08
....	....	....	....	....	....	.23.	.2	U25
....	....	....	....	....	....	...3.	.2	U20
....	....	....	....	....	....	.2..	.2	U20
....	....	....	....	....	....	....	.2	U08 U30
....	....	....	....	....	1..4	....	1.	U24
....	....	....	....	....	...4	....	1.	U29
....	....	....	....	....	1...	....	1.	U29
....	....	....	....	....	....	....	1.	U08 U30
...4	.2..	....	....	....	....	...4	..	U21
....	.2..	....	....	....	....	...4	..	U16
...4	....	....	....	....	....	...4	..	U16
....	....	....	....	....	....	...4	..	U08 U26
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U20
....	....	....	....	....	...4	....	..	U29
1...	..34	....	....	....	..3.	....	..	U22
....	..34	....	....	....	..3.	....	..	U18 U22 U28
....	...4	....	....	....	..3.	....	..	U27
....	....	....	....	....	..3.	....	..	U08 U26
....	....	....	....	....	1...	....	..	U29
....	...4	....	....	....	....	....	..	U27
....	.3..	....	....	....	....	....	..	U27
....	2...	....	....	....	....	....	..	U16
...4	....	....	....	....	....	....	..	U16
1...	....	....	....	....	....	....	..	U17 U18 U22
X..X	.XXX	....	....	....	X.XX	.XXX	XX	U23 U28

PIASTRA-BOARD RESI 2A 0610066 D

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.234	.2	U14
....	....	....	....	....	....	...4	.2	U19
....	....	....	....	....	....	1...	.2	U16 U25
....	....	....	....	....	....	....	.2	U16 U17 U19 U25
....	....	....	....	....	....	.234	..	U21
....	....	....	....	....	.3..	...4	..	U24
....	....	....	....	....	....	...4	..	U16 U19 U21 U22
....	....	....	....	....	....	.23.	..	U18
....	....	....	....	....	.2..	..3.	..	U23
....	....	....	....	....	....	..3.	..	U16 U18 U21 U22
....	....	....	....	....	....	.2..	..	U17 U18 U21 U22
....	....	....	....	....	....	.XXX	.X	U14

REVISION

COPIE AI N.
IND. REV.

PIASTRA-GUARD RESI 2A 0610066 U

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U17 U25
....	....	....	....	....	....	.234	..	U14 U21
....	....	....	....	....	..3.	...4	..	U24
....	....	....	....	....	....	...4	..	U16 U19 U21 U22 U24
....	....	....	....	....	....	.23.	..	U18
....	....	....	....	....	.2..	..3.	..	U23
....	....	....	....	....	....	..3.	..	U16 U18 U21 U22 U23
....	....	....	....	....	....	.2..	..	U17 U18 U21 U22 U23
....	....	....	....	....	....	1...	..	U16 U25
....	....	....	....	....	....	.XXX	.X	U14

REVISION

PIASTRA-BUARD RESI 2A 0A10066 D

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	.2	U14
....	....	....	....	....	....	...4	.2	U19
....	....	....	....	....	....	1...	.2	U25
....	....	....	....	....	....	....	.2	U16 U17 U19 U24 U25
....	....	....	....	....	....	..34	..	U21
....	....	....	....	....	....	...4	..	U16 U19 U21 U22 U24
....	....	....	....	....	....	..3.	..	U16 U18 U21 U22 U23
....	....	....	....	....	....	.2..	..	U17 U21
....	....	....	....	....	....	1...	..	U16 U25
....	....	....	....	....	..3.	....	..	U24
....	....	....	....	....	.2..	....	..	U23
....	....	....	....	....	....	.XXX	.X	U14

PIASTRA-BOARD RESI 2A 0610066 D

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.234	.2	U14
....	....	....	....	....	....	.2..	.2	U17
....	....	....	....	....	....	1...	.2	U25
....	....	....	....	....	....	....	.2	U17 U19 U25
....	....	....	....	....	....	..34	..	U16
....	....	....	....	....	..3.	...4	..	U24
....	....	....	....	....	....	...4	..	U16 U19 U21
....	....	....	....	....	.2..	..3.	..	U23
....	....	....	....	....	....	..3.	..	U16 U18 U21
....	....	....	....	....	....	.2..	..	U17 U18 U21
....	....	....	....	....	....	1...	..	U25
....	....	....	....	....	....	.XXX	.X	U14

REVISION

PIASTRA-BOARD RESI 24 0A1006C II

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U25
....	....	....	....	....	....	.234	..	U22
....	....	....	....	....	....	...4	..	U21 U22
....	....	....	....	....	....	..3.	..	U21 U22
....	....	....	....	....	....	.2..	..	U21 U22
....	....	....	....	....	....	1...	..	U16 U25
....	....	....	....	....	...3	....	..	U24
....	....	....	....	....	.2..	....	..	U23
....	....	....	....	....	....	.XXX	.X	U14

REVISION

COPIE A: IND. REV.

PIASTRA-BOARD RESI 2A 0610066 D

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.234	.2	U14
....	....	....	....	....	....	...4	.2	U24
....	....	....	....	....	....	.2..	.2	U17
....	....	....	....	....	....	....	.2	U17 U19 U24 U25
....	....	....	....	....	....	..34	..	U16
....	....	....	....	....	....	...4	..	U16 U19 U21 U24
....	....	....	....	....	....	.23.	..	U23
....	....	....	....	....	....	..3.	..	U16 U18 U21 U23
....	....	....	....	....	....	.2..	..	U17 U18 U21 U23
....	....	....	....	....	....	1...	..	U25
....	....	....	....	....	..3.	....	..	U24
....	....	....	....	....	.2..	....	..	U23
....	....	....	....	....	....	.XXX	.X	U14

REVISION

COPIE A:
IND.
REV.

PIASTRA-BOARD RESI 2A 0610066 D

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U16 U17 U25
....	....	....	....	....	....	.234	..	U21
....	....	....	....	....	....	...4	..	U16 U21 U22
....	....	....	....	....	....	..3.	..	U16 U21 U22
....	....	....	....	....	....	.2..	..	U17 U21 U22
....	....	....	....	....	....	1...	..	U25
....	....	....	....	....	..3.	....	..	U24
....	....	....	....	....	.2..	....	..	U23
....	....	....	....	....	....	.XXX	.X	U14

COPIE A:
TO:
IND. INT.

REVISION

PIASTRA-BOARD RESI 2A U61O066 D

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U16 U25
....	....	....	....	....	....	.234	..	U14 U21
....	....	....	....	....	....	...4	..	U16 U19 U21
....	....	....	....	....	....	.23.	..	U16
....	....	....	....	....	....	..3.	..	U16 U18 U21
....	....	....	....	....	....	.2..	..	U17 U18 U21
....	....	....	....	....	....	.XXX	.X	U14

REVISION

PIASTRA-BOARD RIIN 2A 0610067 H

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	V08
....	....	....	....	....	....	....	1.	V09
....	....	....	....	....	....	...4	..	V10
....	....	....	....	....	....	..3.	..	V12
....	....	....	....	....	....	.2..	..	V11
....	....	....	....	....	....	1...	..	V13
....	....	....	....	....	4	....	..	V14
....	....	....	..3.	....	....	....	..	V05
....	....	....	1...	....	....	....	..	V07
....	....	...4	....	....	....	....	..	V06
....	....	..3.	....	....	....	....	..	V04
....	....	.2..	....	....	....	....	..	V03
....	....	1...	....	....	....	....	..	V02
....	...4	....	....	....	....	....	..	V01

REVISION

COPIE A: FO.
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

EMISS. AUG 1,1968

Nº 400240000

CONT. SU FO. 652 FO. 651

PIASTRA-BOARD RIIN 2A 0610067 H

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	V08
....	....	....	....	....	....	....	1.	V09
....	....	....	....	....	....	...4	..	V10
....	....	....	....	....	....	..3.	..	V12
....	....	....	....	....	....	.2..	..	V11
....	....	....	....	....	....	1...	..	V13
....	....	....	....	....	...4	....	..	V14
....	....	....	..3.	....	....	....	..	V05
....	....	....	1...	....	....	....	..	V07
....	....	...4	....	....	....	....	..	V06
....	....	..3.	....	....	....	....	..	V04
....	....	.2..	....	....	....	....	..	V03
....	....	1...	....	....	....	....	..	V02
....	...4	....	....	....	....	....	..	V01

REVISION

COPIE A: FO. IND. REV.

UNIT K270

COMPIL. GE 425 APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD SEBO 2A 0610068 M

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U25
....	....	.2..	....	..4	..3.	1..4	..	U13 U17
....	....	.2..	....	....	..3.	1..4	..	U17
....	....	....	....	....	....	1..4	..	U06 U07
....	....	....	....	...4	....	...4	..	U25
....	....	....	....	1...	...4	....	..	U14
....	....	.2..	..3.	...4	.23.	....	..	U16 U17
1...	....	.2..	....	1..4	..3.	....	..	U13 U17
....	....	.2..	....	...4	..3.	....	..	U06 U16
....	....	.2..	....	....	..3.	....	..	U14
....	....	....	....	....	..3.	....	..	U09 U12
....	....	....	....	.2..	....	....	..	U18
1...	....	....	....	1...	....	....	..	U11
....	....	....	....	1...	....	....	..	U07
....	....	....	...4	....	....	....	..	U07
....	....	....	..3.	....	....	....	..	U19
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

REVISION

COPIE AI N°
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

N° 401240000

EMISS AUG 1968

CONT. SU FO. 657 FO. 656

PIASTRA-BOARD SEBO 2A 0610068 W

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	.2	U25
....	....	....	....	....	....	....	.2	U25 U28
....	....	.2..	..34	1...	..34	.2.4	1.	U13
....	....	....	..3.	12..	...4	....	1.	U18
....	....	....	..3.	1...	...4	....	1.	U13 U18
....	....	....	..3.	....	....	....	1.	U19
....	....	.2..	...4	....	..3.	.2.4	..	U22 U23
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	...4	..	U25
....	....	.2..	..34	....	..3.	..3.	..	U22 U23
....	....	....	....	1...	...4	....	..	U14
....	....	.23.	...4	....	..3.	....	..	U13 U22 U23
....	....	.2..	...4	....	..3.	....	..	U07
....	....	.2..	....	....	..3.	....	..	U14
....	....	....	....	....	.3..	....	..	U09 U12
....	....	....	....	...4	....	....	..	U06
....	....	....	....	.2..	....	....	..	U18 U22
....	....	....	....	1...	....	....	..	U07
....	....	....	..3.	....	....	....	..	U19
....	....	..3.	....	....	....	....	..	U24
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

REVISION

COPIA AL: IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

EMISS. AUG 1,1968

SEZ. SPS - OGE

LOC. PREGNANA (MI)

N^o 7111240000

PIASTRA-BOARD SEBO 2A 0610068 H

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	.2	U25
....	....	....	....	....	....	....	.2	U25 U28
....	....	.2..	..34	1..4	..34	12.4	1.	U13
....	....	....	..3.	1...	..34	....	1.	U13 U18 U21
....	....	....	..3.	....	..3.	....	1.	U19
....	....	....	...4	....	....	.2.4	..	U22 U23
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	...4	....	1..4	..	U16 U17
....	....	....	....	....	....	1..4	..	U06 U07
....	....	....	....	....	....	...4	..	U25
....	....	....	..34	....	..3.	..3.	..	U21 U22 U23
....	....	....	....	1...	...4	....	..	U14
....	....	....	..3.	...4	.23.	....	..	U16 U17
....	....	....	..3.	....	..3.	....	..	U19
....	....	....	....	....	..3.	....	..	U09 U12 U13
1...	....	.23.	...4	...4	....	....	..	U13
1...	....	....	....	...4	....	....	..	U16 U17
....	....	....	....	...4	....	....	..	U06
....	....	....	....	.2..	....	....	..	U18 U22
....	....	....	....	1...	....	....	..	U07
....	....	..3.	...4	....	....	....	..	U22 U23
....	....	....	...4	....	....	....	..	U07
....	....	..3.	....	....	....	....	..	U24
....	....	.2..	....	....	....	....	..	U14
1...	....	....	....	....	....	....	..	U11
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

REVISION

PIASTRA-BOARD SEBO 2A 0610068 W

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	.2	U25
....	....	....	....	....	....	....	.2	U25 U28
....	....	.2..	....	...4	....	1..4	..	U13 U16 U17
....	....	....	....	...4	....	1..4	..	U06 U07
....	....	....	....	....	....	...4	..	U25
....	....	....	....	1...	..34	....	..	U14
1...	....	.2..	....	1..4	..3.	....	..	U13 U16 U17
1...	....	....	....	1...	..3.	....	..	U11
....	....	....	....	1...	..3.	....	..	U07
....	....	....	....	....	..3.	....	..	U09 U12 U13
....	....	2..	..3.	...4	2...	....	..	U16 U17
....	....	2..	....	...4	....	....	..	U06
....	....	....	....	.2..	....	....	..	U18 U22
....	....	....	...4	....	....	....	..	U07
....	....	....	..3.	....	....	....	..	U19
....	....	.2..	....	....	....	....	..	U14
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

PIASTRA-BOARD SEBO 2A 0610068 W

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	...4	.2	U25
....	....	....	....	....	....	....	.2	U25 U28
....	....	.2..	....	...4	..3.	1..4	..	U13 U16 U17
....	....	....	....	....	..3.	1..4	..	U06 U07
....	....	....	....	....	..3.	...4	..	U25
....	....	....	....	1...	...4	....	..	U14
....	....	....	....	....	..3.	....	..	U09 U12 U13 U21
....	....	.2..	..3.	...4	.2..	....	..	U16 U17
1...	....	.2..	....	1..4	....	....	..	U13 U16 U17
....	....	.2..	....	...4	....	....	..	U06
....	....	....	....	.2..	....	....	..	U18
1...	....	....	....	1...	....	....	..	U11
....	....	....	....	1...	....	....	..	U07
....	....	....	...4	....	....	....	..	U07
....	....	....	..3.	....	....	....	..	U19
....	....	.2..	....	....	....	....	..	U14
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

PIASTRA-BOARD SEBO 2A 0610U68 H

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	.2	U25
....	....	....	....	....	....	....	.2	U25 U28
....	....	....	....	....	....	....	1.	U19
....	....	....	..3.	....	..3.	.234	..	U23
....	....	....	..3.	....	....	.234	..	U13
....	....	.23.	...4	1...	....	.2.4	..	U22
....	....	....	....	....	....	.2.4	..	U22 U24
....	....	....	....	....	....	...4	..	U25
....	....	..3.	..3.	1...	..3.	..3.	..	U23
....	....	.2..	..34	....	..3.	..3.	..	U21
....	....	....	..3.	....	..3.	..3.	..	U24
....	....	..3.	..3.	1...	....	..3.	..	U13
....	....	.2..	..34	....	....	..3.	..	U13
....	....	....	..3.	....	..3.	....	..	U19
....	....	....	....	....	..3.	....	..	U09 U12
....	....	....	....	....	.2..	....	..	U11
....	....	....	.2..	....	....	....	..	U18 U22
....	....	..3.	....	1...	....	....	..	U22 U24
....	....	....	....	1...	....	....	..	U07
....	....	.2..	....	....	....	....	..	U14
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

PIASTRA-BOARD SEBO 2A 0610068 W

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U25 U28
....	....	....	....	....	....	....	1.	U19
....	....	....	..3.	....	.23.	1..4	..	U16 U17
....	....	....	..3.	....	.2..	1..4	..	U13
....	....	....	....	....	....	1..4	..	U06 U07
....	....	....	....	...4	....	...4	..	U25
....	....	....	....	....	....	..3.	..	U24
....	....	.2..	..3.	...4	.23.	....	..	U16
1...	....	....	..3.	1...	.23.	....	..	U16 U17
....	....	....	..3.	....	.23.	....	..	U11
....	....	....	..3.	....	..3.	....	..	U19
....	....	....	....	....	..3.	....	..	U09 U12
....	....	.2..	..3.	...4	.2..	....	..	U13
1...	....	....	..3.	1...	.2..	....	..	U13
....	....	....	....	.2..	....	....	..	U18 U22
1...	....	....	....	1...	....	....	..	U11
....	....	....	....	1...	....	....	..	U07
....	....	.2..	....	....	....	....	..	U14
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

REVISION

PIASTRA-BOARD SEBO 2A 0610068 W

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U25 U28
....	....	.2..	..34	1..4	.234	..3.	1.	U13
....	....	.2..	...4	1...	.34	..3.	1.	U21
1...	....	..3.	..3.	1...	.2.4	..3.	1.	U13
....	....	....	....	1...	...4	....	1.	U13 U18 U21
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	.234	..	U13
....	....	....	....	....	....	.234	..	U22 U23
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	.2..	1..4	..	U16 U17
....	....	....	....	....	....	1..4	..	U06 U07
....	....	....	....	....	....	...4	..	U25
....	....	.2..	...4	....	..3.	..3.	..	U21 U22
....	....	..3.	....	1...	....	..3.	..	U22 U23
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	1...	...4	....	..	U14
....	....	.2..	..3.	...4	.23.	....	..	U16
....	....	.2..	....	...4	.23.	....	..	U16
....	....	.2..	....	....	..3.	....	..	U14
....	....	....	....	....	..3.	....	..	U09 U12
1...	....	....	....	1...	.2..	....	..	U16 U17
....	....	....	....	....	.2..	....	..	U11
....	....	....	....	.2..	....	....	..	U10
....	....	..3.	....	1...	....	....	..	U24
1...	....	....	....	1...	....	....	..	U11
....	....	....	....	1...	....	....	..	U07
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

PIASTRA-BOARD SEBO 2A 0610068 H

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U25 U28
....	....	.2..	..3.	1..4	...4	1..4	1.	U13
....	....	....	..3.	1...	..34	....	1.	U21
....	....	....	..3.	1...	...4	....	1.	U18 U21
....	....	....	..3.	....	....	....	1.	U19
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	.23.	1..4	..	U13 U16 U17
....	....	.2..	....	..,4	..3.	1..4	..	U16 U17
....	....	....	....	....	..3.	1..4	..	U06 U07 U16
....	....	....	....	..,.	..3.	...4	..	U25
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	1...	...4	....	..	U13 U14
....	....	....	....	....	..3.	....	..	U09 U21
....	....	....	....	....	.2..	....	..	U11
....	....	.2..	....	...4	....	....	..	U06 U16
....	....	....	....	.2,.	....	....	..	U18
....	....	....	....	1...	....	....	..	U07
....	....	....	.3.	....	....	....	..	U19
....	....	.2..	....	....	....	....	..	U14
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

REVISION

PIASTRA-BOARD SEBO 2A 0610068 H

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U25 U28
....	....	....	..3.	....	....	....	1.	U19
....	....	....	..3.	....	..3.	.234	..	U13 U22 U23
....	....	.2..	...4	....	..3.	.2.4	..	U21 U22 U23
....	....	....	....	....	..3.	.2.4	..	U24
....	....	.2..	...4	....	....	.2.4	..	U13
....	....	....	....	....	..3.	...4	..	U25
....	....	....	..3.	....	....	..3.	..	U24
....	....	....	....	....	....	1...	..	U06 U07
....	....	....	....	....	..3.	....	..	U09 U21
....	....	....	....	.2..	....	....	..	U18
....	....	....	....	1...	....	....	..	U07
....	....	.2..	...4	....	....	....	..	U07
....	....	....	..3.	....	....	....	..	U19
....	....	.2..	....	....	....	....	..	U14
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

PIASTRA-BOARD SEBO 2A 0610068 W

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	.2	U25
....	....	....	....	....	....	....	.2	U25 U28
1...	....	.2..	..3.	...4	...4	....	1.	U13
....	....	....	..3.	....	...4	....	1.	U13 U18 U21
....	....	....	..3.	....	....	....	1.	U19
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	...4	..	U25
....	....	....	....	....	...4	....	..	U14
1...	....	....	....	1...	.23.	....	..	U13 U16 U17
1...	....	.2..	....	1..4	..3.	....	..	U16 U17
1...	....	....	....	1...	..3.	....	..	U11 U16
....	....	....	....	1...	..3.	....	..	U07
....	....	....	....	....	..3.	....	..	U09 U12
....	....	....	....	....	.2..	....	..	U11
1...	....	.2..	....	1..4	....	....	..	U13
....	....	.2..	....	...4	....	....	..	U06 U16
....	....	....	....	.2..	....	....	..	U18
....	....	....	..3.	....	....	....	..	U19
....	....	.3..	....	....	....	....	..	U24
....	....	.2..	....	....	....	....	..	U14
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

REVISION

PIASTRA-BOARD SEBO 2A 0610068 W

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	.2	U25
....	....	....	....	....	....	....	.2	U25 U28
....	....	....	..3.	....	....	....	1.	U19
....	....	....	....	....	....	...4	..	U25
....	....	..3.	..3.	1...	..3.	..3.	..	U13 U22 U23
....	....	....	..3.	....	....	..3.	..	U24
....	....	.23.	...4	1...	..3.	....	..	U21 U22 U23
....	....	..3.	....	1...	..3.	....	..	U24
....	....	....	....	1...	..3.	....	..	U07
....	....	....	....	....	..3.	....	..	U09 U12
....	....	....	....	.2..	....	....	..	U18 U22
....	....	.23.	...4	1...	....	....	..	U13
....	....	.2..	...4	....	....	....	..	U07
....	....	....	..3.	....	....	....	..	U19
....	....	.2..	....	....	....	....	..	U14
1...	....	....	....	....	....	....	..	U11
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

REVISION

PIASTRA-BOARD SEBO 2A 0610068 W

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	...4	.2	U25
....	....	....	....	....	....	....	.2	U25 U28
....	....	.23.	..34	....	..34	....	1.	U13
....	....	.23.	..34	....	...4	....	1.	U21
....	....	....	..3.	....	...4	....	1.	U13 U18 U21
....	....	....	..3.	....	....	....	1.	U19
....	....	....	....	....	....	....	1.	U19
....	....	..3.	....	1...	..3.	.2.4	..	U21
....	....	....	....	....	..3.	1..4	..	U06 U07
....	....	....	....	....	..3.	...4	..	U25
....	....	..3.	....	1...	....	..3.	..	U13 U22 U23
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	...4	....	..	U13 U14
....	....	....	....	....	..3.	....	..	U09 U12 U21
....	....	....	....	.2..	....	....	..	U18
....	....	.23.	...4	1...	....	....	..	U13 U21 U22 U23
....	....	..3.	....	1...	....	....	..	U24
....	....	....	....	1...	....	....	..	U07
....	....	.2..	...4	....	....	....	..	U07
....	....	....	..3.	....	....	....	..	U19
....	....	.2..	....	....	....	....	..	U14
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

PIASTRA-BOARD SEBO 2A 0610068 W

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U25 U28
....	....	.2..	..34	1..4	...4	12.4	1.	U13
....	....	.2..	..34	1...	..34	.2..	1.	U21
....	....	....	..3.	1...	...4	....	1.	U18 U21
....	....	....	..3.	....	....	....	1.	U19
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	.23.	1234	..	U13
....	....	....	....	....	....	.23.	..	U22 U23
....	....	....	....	....	....	..3.	..	U24
....	....	.2..	...4	....	....	.2..	..	U21 U23
....	....	....	....	....	....	.2..	..	U22 U24
....	....	....	....	....	.2..	1...	..	U16 U17
....	....	.2..	....	...4	....	1...	..	U16 U17
....	....	....	....	...4	....	1...	..	U06 U07 U16
....	....	....	....	1..4	...4	....	..	U13 U14
....	....	....	....	...4	..3.	....	..	U09 U21
....	....	....	....	....	.2..	....	..	U11
....	....	.2..	....	...4	....	....	..	U06 U16
....	....	....	....	.2..	....	....	..	U18
....	....	....	....	1...	....	....	..	U07
....	....	..3.	...4	....	....	....	..	U22
....	....	.2..	...4	....	....	....	..	U07 U22
....	....	....	..3.	....	....	....	..	U19
....	....	.2..	....	....	....	....	..	U14
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

COPIE A: / COPY TO: / REV.

REVISION

PIASTRA-BOARD SEBO 2A 0610068 W

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	..3.	...4	.2	U25
....	....	....	....	....	....	....	.2	U25 U28
....	....	....	..3.	1...	...4	....	1.	U13 U18 U21
....	....	....	..3.	....	....	....	1.	U19
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	..3.	.2.4	..	U24
....	....	....	....	....	..3.	1..4	..	U06 U07
....	....	....	....	....	..3.	...4	..	U25
....	....	....	....	1...	...4	....	..	U14
....	....	....	....	....	..3.	....	..	U09 U12 U21
....	....	....	....	.2..	....	....	..	U18
....	....	....	....	1...	....	....	..	U07
....	....	....	..3.	....	....	....	..	U19
....	....	.2..	....	....	....	....	..	U14
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

REVISION

COPIE A:
TO:
IND. REV.

UNIT K270

COMPIL. GE 423

APPR.

SEC. SPS - OGE
SEG.
LOC. PREGNANA (MI)

EMISS. AUG 1,1968

Nº 400240000

CONT. SU FO. 671 FO. 670

PIASTRA-BOARD SEBO 2A 0610068 H

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	.2	U25
....	....	....	....	....	....	....	.2	U25 U28
....	....	....	..3.	1...	..34	....	1.	U13 U18 U21
....	....	....	..3.	....	....	....	1.	U19
....	....	....	....	....	....	....	1.	U19
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	...4	..	U25
....	....	....	....	1...	..34	....	..	U14
1...	....	....	....	1...	..3.	....	..	U11
....	....	....	....	1...	..3.	....	..	U07
....	....	....	....	....	..3.	....	..	U09 U12
....	....	....	....	.2..	....	....	..	U18
....	....	....	..3.	....	....	....	..	U19
....	....	.2.	....	....	....	....	..	U14
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

PIASTRA-BOARD SEBO 2A 0610068 N

PROVA-TEST = 17

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U25 U28
....	....	....	..3.	12..	...4	....	1.	U18
....	....	....	..3.	1...	...4	....	1.	U13 U18
....	....	....	..3.	....	....	....	1.	U19
....	....	....	..3.	....	....	.234	..	U13 U22 U23
....	....	.2..	...4	....	..3.	.2.4	..	U13 U21 U22 U23
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	...4	..	U25
....	....	....	..3.	....	....	..3.	..	U24
....	....	.2..	....	1...	..34	....	..	U14
....	....	....	....	1...	...4	....	..	U13 U14
....	....	.2..	....	...4	..3.	....	..	U06
....	....	.2..	...4	....	..3.	....	..	U07
....	....	.2..	....	....	..3.	....	..	U14
....	....	....	....	....	..3.	....	..	U09 U12 U21
....	....	....	....	.2..	....	....	..	U18
....	....	....	....	1...	....	....	..	U07
....	....	....	..3.	....	....	....	..	U19
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

REVISION

PIASTRA-BOARD SEBU 2A 0610068 H

PROVA-TEST = 18

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U25 U28
....	....	....	..3.	....	..3.	....	1.	U19
....	....	....	..3.	....	..3.	.234	..	U13 U21 U22 U23
....	....	.2..	...4	....	..3.	.2.4	..	U13
....	....	.2..	...4	....	....	.2.4	..	U13 U21 U22 U23
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	4	..	U25
....	....	....	..3.	....	..3.	..3.	..	U24
....	....	....	..3.	....	.23.	....	..	U11
....	....	....	..3.	....	..3.	....	..	U19
....	....	....	....	....	..3.	....	..	U09 U12 U13 U21
....	....	....	....	.2..	....	....	..	U18
....	....	....	....	1...	....	....	..	U07
....	....	.2..	...4	....	....	....	..	U07
....	....	.2..	....	....	....	....	..	U14
X...	....	.XX.	..XX	X..X	.XXX	XXXX	XX	U16 U21

REVISION

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

CONT. SU FO. 677 FO. 676

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	.2..	1...	....	..	U23
....	....	....	....	....	1...	....	..	U23 U24
....	....	....	....	...4	....	....	..	U18
....	....	....	....	.2..	....	....	..	U23
....	....	....	....	1...	....	....	..	U19 U21
....	1...	....	....	....	....	....	..	U13 U14

REVISION

COPIE A: IND. TO: REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE

SEG.

LOG. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1, 1968

CONT. SU FO. 677 FO. 676

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

Nº APPLIC. 130

CONT. SU FO. 678 FO. 677

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1..4	1...	....	..	U19
....	....	....	....	...4	1...	....	..	U19 U23 U24
....	....	....	....	...4	....	....	..	U18 U19
....	..3.	....	....	.2..	....	....	..	U17 U22
....	....	....	....	1.2.	....	....	..	U23
....	....	....	....	1...	....	....	..	U18 U19 U21
....	..3.	....	....	....	....	....	..	U13 U17
....	1...	....	....	....	....	....	..	U13 U14

REVISION

COPIE A FO. IND. REV.

UNIT K270

COMPIL. GE 425

EMISS. AUG 1,1968

APPR.

SEZ. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 678 FO. 677

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	...4	....	....	..	U18
....	..3.	....	....	.2..	....	....	..	U17 U22
....	....	....	....	.2..	....	....	..	U23
....	....	....	....	1...	....	....	..	U13 U19 U21
....	..3.	....	....	....	....	....	..	U13 U17
....	1...	....	....	....	....	....	..	U13 U14

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	...4	....	....	..	U18 U19
....	..3.	....	....	.2..	....	....	..	U17 U21 U22
....	....	....	....	.2..	....	....	..	U17 U23
....	....	....	....	1...	....	....	..	U13 U19 U21
....	1.3.	....	....	....	....	....	..	U13
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U13 U14

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	1...	....	..	U19
....	1...	....	....	....	1...	....	..	U24
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	...4	....	....	..	U18 U19
....	....	....	....	.2..	....	....	..	U17 U21 U22 U23
....	....	....	....	1...	....	....	..	U19
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	...4	....	....	..	U13 U14

REVISION

COPIE A.C. / IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

CONT. SU FO. 681 FO. 680

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. E 130

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	1...	....	..	U19
....	1...	....	....	....	1...	....	..	U24
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	...4	....	....	..	U18 U19
....	....	....	....	.2..	....	....	..	U17 U21 U23
....	....	....	....	1...	....	....	..	U19
....	1...	....	....	....	....	....	..	U13 U14

REVISION

COPIE A: DO
IND. REV.

COMPIL. GE 425	APPR.	UNIT K270	
EMISS. AUG 1,1968		SEZ. SEC. SPS - OGE LOC. PREGNANA (MI)	Nº 400240000 CONT. SU FO. 682 FO. 681

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	1...	....	..	U19
....	1...	....	....	....	1...	....	..	U24
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	..,4	....	....	..	U18 U19
....	....	....	....	.2..	....	....	..	U17 U21 U22 U23
....	1...	....	....	1.,.	....	....	..	U13
....	....	....	....	1...	....	....	..	U13 U19 U21
....	1...	....	....	..,.	....	....	..	U13 U14

REVISION

COPIE AD. ED.
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

EMISS. AUG 1,1968

Nº 400240000

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	•2••	1•••	••••	••	U23
••••	1•••	••••	••••	••••	1•••	••••	••	U24
••••	••••	••••	••••	••••	1•••	••••	••	U19 U23
••••	••••	••••	••••	1••4	••••	••••	••	U19
••••	••••	••••	••••	•••4	••••	••••	••	U18 U19
••••	••••	••••	••••	•2••	••••	••••	••	U17 U21 U23
••••	••••	••••	••••	1•••	••••	••••	••	U19
••••	1•••	••••	••••	••••	••••	••••	••	U13 U14

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

I° APPLIC. GE 130

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1..4	1...	....	..	U19
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	...4	....	....	..	U18 U19
....	....	....	....	.2..	....	....	..	U17 U21 U22 U23
....	....	....	....	1...	....	....	..	U19
....	1...	....	....	....	....	....	..	U13 U14 U24

COPIE A:
TO:
IND.
REV.

REVISION

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.

LOC. PREGNANA (MI)

Nº 400240000

EMIS. AUG 1,1968

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1..4	1...	....	..	U19
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	...4	....	....	..	U18 U19
....	....	....	....	.2..	....	....	..	U17 U21 U22 U23
....	....	....	....	1...	....	....	..	U19
....	1...	....	....	....	....	....	..	U13 U14 U24

COPIE A: OC. IND. REV.

REVISION

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	12.4	....	....	..	U19
....	....	....	....	-2.4	....	....	..	U18 U19
....	....	....	....	...4	....	....	..	U18
....	....	....	....	-2..	....	....	..	U17 U18 U20 U21 U22 U23 U25
....	....	....	....	1...	....	....	..	U19
....	..3.	....	....	....	....	....	..	U13
....	1...	....	....	....	....	....	..	U13 U14

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	.2..	1...	....	..	U23
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	...4	....	....	..	U18
....	....	....	....	.2..	....	....	..	U17 U23 U25
....	....	....	....	1...	....	....	..	U19
....	1...	....	....	....	....	....	..	U13 U14 U24

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	.2..	1...	....	..	U23
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	...4	....	....	..	U18
....	....	....	....	.2..	....	....	..	U17 U22 U23 U25
....	....	....	....	1...	....	....	..	U19
....	1...	....	....	....	....	....	..	U13 U14

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	.2..	1...	....	..	U23
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	.2.4	....	....	..	U18 U19
....	....	....	....	...4	....	....	..	U18 U19
....	....	....	....	.2..	....	....	..	U17 U20 U23
....	....	....	....	1...	....	....	..	U19
....	1...	....	....	....	....	....	..	U13 U14

COPIE AI TOT. IND. REV.

REVISION

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	1...	....	..	U19
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	2.4	....	....	..	U18
....	....	....	....	...4	....	....	..	U18
....	....	....	....	2...	....	....	..	U17 U18 U19 U20 U22 U23
....	....	....	....	1...	....	....	..	U19
....	1...	....	....	....	....	....	..	U13 U14

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	1...	1...	....	..	U19
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	...4	....	....	..	U18
....	....	....	....	2..	....	....	..	U17 U23 U25
....	....	....	....	1...	....	....	..	U19 U21
....	1...	....	....	....	....	....	..	U13 U14

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

N° APPLIC. GE 130

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 17

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	.2..	1...	....	..	U23
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	...4	....	....	..	U18
....	....	....	....	.2..	....	....	..	U17 U22 U23 U25
....	....	....	....	1...	....	....	..	U19
....	1...	....	....	....	....	....	..	U13 U14

COPIE A:
IND. REV.

REVISION

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE

LOC. PREGNANA (MI)

EMISS. AUG 1,1968

N° 400240000

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 18

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	•2••	1•••	••••	••	U23
••••	••••	••••	••••	••••	1•••	••••	••	U19 U23 U24
••••	••••	••••	••••	12•4	••••	••••	••	U19
••••	••••	••••	••••	•2•4	••••	••••	••	U18 U19
••••	••••	••••	••••	•••4	••••	••••	••	U18
••••	••••	••••	••••	•2••	••••	••••	••	U17 U20 U23
••••	••••	••••	••••	1•••	••••	••••	••	U19
••••	1•••	••••	••••	••••	••••	••••	••	U13 U14

P ASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 19

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	.2..	1...	....	..	U23
....	....	....	....	....	1...	....	..	U19 U23 U24
....	....	....	....	12.4	....	....	..	U19
....	....	....	....	.2.4	....	....	..	U18 U19
....	....	....	....	...4	....	....	..	U16
....	....	....	....	.2..	....	....	..	U17 U20 U22 U23
....	....	....	....	1...	....	....	..	U19
....	1...	....	....	....	....	....	..	U13 U14

REVISION

COPIE A: FOG. IND. REV.

PIASTRA-BOARD STOL 2A 0610069 S

PROVA-TEST = 20

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	.2..	1...	....	..	U23
....	....	....	....	..,.	1...	....	..	U19 U23 U24
....	....	....	....	1..4	....	....	..	U19
....	....	....	....	..,4	....	....	..	U18 U19
....	....	....	....	.2..	....	....	..	U17 U23 U25
....	....	....	....	1...	....	....	..	U19 U21
....	1...	....	....	....	....	....	..	U13 U14

PIASTRA-BOARD TISE 2A 0610071 2

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1..4	....	1.	U20
....	....	....	....	....	....	....	1.	U20 U23
....	....	....	....	....	...4	....	..	U17 U20
....	....	....	....	....	1...	....	..	U20 U23
....	....	....	....	-2..	....	....	..	U24 V01
....	....	....	..3.	....	....	....	..	U25 V03
....	....	....	.2..	....	....	....	..	U24 V02
..3.	....	....	....	....	....	....	..	U21
....	....	....	....	....	X...	....	X.	U19
....	....	....	.X..	.X..	....	....	..	U24

COPIE AL TOT.
IND. REV.

REVISION

PIASTRA-BOARD TISE 2A 0610071 Z

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1..4	....	1.	U28
....	....	....	....	....	1...	....	1.	U19 U23
....	....	....	....	....	....	....	1.	U18 U19 U20 U22 U23
....	....	....	....	....	...4	....	..	U17 U18 U20 U22 U28
....	....	....	....	....	1...	....	..	U18 U19 U20 U22 U23
....	....	....	....	.2..	....	....	..	V01
....	....	....	..3.	....	....	....	..	V03
....	....	....	.2..	....	....	....	..	V02
..3.	....	....	....	....	....	....	..	U21

COPIE A:
IND.
REV.

REVISION

PIASTRA-GUARD TISE 2A 0A10071 2

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1..4	....	1.	U28
....	....	....	....	....	1...	....	1.	U19 U23
....	....	....	....	....	....	....	1.	U18 U19 U20 U22 U23
....	....	....	...0	....	...4	....	..	U17 U18 U20 U22 U28
....	....	....	....	....	1...	....	..	U18 U19 U20 U22 U23
....	....	....	....	.2..	....	....	..	V01
....	....	....	..3.	....	....	....	..	V03
....	....	....	.2..	....	....	....	..	V02
..3.	....	....	....	....	....	....	..	U17 U21

REVISION

COPIE A:
OS:
IND.
REV.

COMPIL. GE 425	APPR.	UNIT K270	Nº 400240000
EMISS. AUG 1,1968		SEZ. SEG. LOC. SPS - OGE PREGNANA (MI)	CONT. SU FO. 704 FO. 703

PIASTRA-BOARD TISE 2A 0610071 2

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U20
....	....	....	....	....	1..4	....	..	U20 U22
....	....	....	....	....	...4	....	..	U17 U20 U22
....	....	....	....	....	1...	....	..	U20 U22 U23
....	....	....	....	2..	....	....	..	V01
....	....	....	..3.	....	....	....	..	V03
....	....	....	.2..	....	....	....	..	V02
..3.	....	....	....	....	....	....	..	U17 U21 U25 U28
....	....	....	....	....	X...	....	X.	U19

REVISION

PIASTRA-BOARD TISE 2A 0610071 2

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
..3.	....	....	....	....	1..4	....	1.	U28
..3.	....	....	....	....	1..4	....	1.	U18 U20 U22
..3.	....	....	....	....	1...	....	1.	U28
....	....	....	.2..	....	....	....	1.	V02
....	....	....	....	....	....	....	1.	U18 U19 U20 U22 U23
....	....	....	..3.	....	...4	....	..	U25 V03
....	....	....	....	....	...4	....	..	U17 U18 U20 U22 U28
....	....	....	....	.2..	1...	....	..	U24 V01
....	....	....	....	....	1...	....	..	U18 U19 U20 U22 U23
..3.	....	....	....	....	....	....	..	U17 U21 U25

PIASTRA-BOARD TISE 2A 0610071 Z

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	·2··	·2··	1···	····	1·	U24
····	····	····	····	····	1···	····	1·	U19 U23
····	····	····	·2··	····	····	····	1·	U24 V02
····	····	····	····	····	····	····	1·	U18 U19 U20 U22 U23
··3·	····	····	··3·	····	···4	····	··	U25
····	····	····	·3··	····	···4	····	··	U25 V03
····	····	····	····	····	···4	····	··	U17 U18 U20 U22 U28
····	····	····	····	·2··	1···	····	··	U24 V01
····	····	····	····	····	1···	····	··	U18 U19 U20 U22 U23
····	····	····	·2··	·2··	····	····	··	U24
····	····	····	····	·2··	····	····	··	U24 V01
··3·	····	····	··3·	····	····	····	··	U25
····	····	····	··3·	····	····	····	··	U25 V03
··3·	····	····	····	····	····	····	··	U17 U21 U25

PIASTRA-BOARD TISE 2A U610071 2

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1..4	....	1.	U20
....	....	....	....	....	....	....	1.	U20 U23
....	....	....	....	....	...4	....	..	U17 U21
....	....	....	....	....	1...	....	..	U20 U23
....	....	....	....	2..	....	....	..	V01
....	....	....	.3.	....	....	....	..	V03
....	....	....	2..	....	....	....	..	V02
.3.	....	....	....	....	....	....	..	U17 U21 U25
....	....	....	....	....	X...	....	X.	U19

PIASTRA-BUARD TISE 2A U610071 2

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1..4	....	1.	U20
....	....	....	....	....	....	....	1.	U20 U23
....	....	....	....	....	1..4	....	..	U18
....	....	....	....	....	...4	....	..	U17 U18 U20 U28
....	....	....	....	2...	1...	....	..	U24 V01
....	....	....	....	....	1...	....	..	U18 U19 U20 U23
....	....	....	..3.	....	....	....	..	U25 V03
....	....	....	.2..	....	....	....	..	U24 V02
..3.	....	....	....	....	....	....	..	U17 U21 U25 U28
....	....	....	....	....	X...	....	X.	U19

PIASTRA-BOARD TISE 2A 0610071 Z

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1...	....	1.	U19 U23
....	....	....	....	....	....	....	1.	U18 U19 U20 U22 U23
....	....	....	....	....	...4	....	..	U17 U18 U20 U28
....	....	....	.2..	.2..	1...	....	..	U24
....	....	....	....	.2..	1...	....	..	U24 V01
....	....	....	....	....	1...	....	..	U18 U19 U20 U22 U23
....	....	....	.2..	.2..	....	....	..	U24
....	....	....	....	.2..	....	....	..	U24 V01
....	....	....	..3.	....	....	....	..	V03
....	....	....	.2..	....	....	....	..	U24 V02
..1.	....	....	....	....	....	....	..	U17 U21

REVISION

COPIE A: TO:
IND. REV.

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1,1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 710 FO. 709

PIASTRA-BOARD TISE 2A 0610071 2

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1...	....	1.	U19 U23
....	....	....	....	....	....	....	1.	U18 U19 U20 U22 U23
....	....	....	....	....	...4	....	..	U17 U18 U20 U22 U28
....	....	....	....	....	1...	....	..	U18 U19 U20 U22 U23 U24 V01
....	....	....	....	.2..	....	....	..	V01
....	....	....	..3.	....	....	....	..	U25 V03
....	....	....	.2..	....	....	....	..	V02

COPIE A.I. FO.
IND. REV.

REVISION

UNIT K270
SEZ. SEC. SPS - OGE
LOC. PREGNANA (MI)

COMPIL. GE 425
EMISS. AUG 1,1968
APPR.

Nº 400240000
CONT. SU FO. 711 FO. 710

PIASTRA-BOARD TISE 2A 0610071 Z

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U20
....	....	....	....	....	1..4	....	..	U20
....	....	....	....	....	...4	....	..	U17 U20
....	....	....	....	....	1...	....	..	U20 U23
....	....	....	....	.2..	....	....	..	V01
....	....	....	..3.	....	....	....	..	V03
....	....	....	.2..	....	....	....	..	V02
..3.	....	....	....	....	....	....	..	U17 U21
....	....	....	....	....	X...	....	X.	U19

PIASTRA-BOARD TISE 2A 0610071 2

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U26
....	....	....	....	....	1..4	....	..	U20
....	....	....	....	....	...4	....	..	U20
....	....	....	....	....	1...	....	..	U20
....	....	....	....	.2..	....	....	..	V01
....	....	....	..3.	....	....	....	..	V03
....	....	....	.2..	....	....	....	..	V02
..3.	....	....	....	....	....	....	..	U17 U21
....	....	....	....	....	X...	....	X.	U19

REVISION

COPIE AN TDI
IND. REV.

PIASTRA-BOARD TISE 2A 0610071 4

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U20
....	....	....	....	....	1..4	....	..	U20
....	....	....	....	....	...4	....	..	U20
....	....	....	....	....	1...	....	..	U20
....	....	....	....	.2..	....	....	..	V01
....	....	....	..3.	....	....	....	..	V03
....	....	....	.2..	....	....	....	..	V02
....	....	....	....	....	X...	....	X.	U19

REVISION

PIASTRA-BOARD TISE 2A 0610071 2

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U20
....	....	....	....	....	1..4	....	..	U20
....	....	....	....	....	...4	....	..	U17 U18 U20 U28
....	....	....	....	....	1...	....	..	U20
....	....	....	....	2..	....	....	..	V01
....	....	....	.3.	....	....	....	..	U25 V03
....	....	....	2..	....	....	....	..	V02
.3.	....	....	....	....	....	....	..	U17 U21
....	....	....	....	....	X...	....	X.	U19

REVISION

COPIE A:
NO.
INC.
NO.

PIASTRA-BOARD TISE 28 I 0610056 C

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	....	....	1.	U30
....	1...	1..4	1...	...4	....	..34	..	U25
....	.3.	...4	1...	.2..	....	..34	..	U20 U25
....	1...	1..4	1...	....	....	..34	..	U25
....	....	1..4	1...	....	....	..34	..	U29
....	....	....	....	....	....	..34	..	U14
....	1..4	....	1...	....	....	...4	..	U20 U25
....	....	....	1...	....	....	...4	..	U18 U19
....	....	....	....	....	....	...4	..	U13 U15
....	..3.	...4	....	....	....	..3.	..	U17 U18
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	1...	1...	....	....	1...	....	..	U24
....	....	....	....	....	1...	....	..	U21 U22 U23 U24
								U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	....	....	....	.2..	....	....	..	U19
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	..4	....	....	....	....	....	..	U15 U19
....	.3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

COPIE A: TO:
IND. INST.

REVISION

PIASTRA-BOARD TISE 2B I 0610056 C

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	....	....	1.	U30
....	....	....	....	....	1...	..34	..	U14
....	..3.	...4	1...	.2..	....	..34	..	U20
....	....	....	....	....	....	..34	..	U13
....	....	....	1...	.2..	....	...4	..	U19
....	....	....	1...	....	....	...4	..	U18 U19
....	...4	....	....	....	....	...4	..	U15
....	....	....	....	....	....	...4	..	U13 U15
....	..3.	...4	....	...4	....	..3.	..	U29
....	1.34	...4	....	.2..	....	..3.	..	U25
....	1.34	...4	....	....	....	..3.	..	U20
....	..3.	...4	....	....	....	..3.	..	U18
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U14 U21 U22 U23 U24 U27 U28
....	1.3.	1...	....	.2.4	....	....	..	U25
....	....	....	....	...4	....	....	..	U25
....	1.3.	1...	....	.2..	....	....	..	U25
....	....	....	....	.2..	....	....	..	U19
....	....	....	1...	....	....	....	..	U17
....	..3.	1...	....	....	....	....	..	U29
....	1...	1...	....	....	....	....	..	U24
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

PIASTRA-BOARD TISE 29 I 0610056 C

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	....	....	1.	U30
....	....	....	....	....	1...	...4	..	U14
....	....	....	1...	.2..	....	...4	..	U19 U20
....	....	....	1...	....	....	...4	..	U18 U19
....	...4	....	....	....	....	...4	..	U15
....	....	....	....	....	....	...4	..	U13 U15
....	....	....	....	....	1...	..3.	..	U14
....	1...	1..4	....	.2.4	....	..3.	..	U25
....	..3.	...4	....	...4	....	..3.	..	U25 U29
....	1...	1..4	....	.2..	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	....	1..4	....	....	....	..3.	..	U29
....	..3.	...4	....	....	....	..3.	..	U18
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U21 U22 U23 U24 U27 U28
....	1..4	....	....	.2.4	....	....	..	U25
....	....	....	....	...4	....	....	..	U25
....	....	....	....	.2..	....	....	..	U19
....	....	....	1...	....	....	....	..	U17
....	1...	1...	....	....	....	....	..	U24
....	....	1...	....	....	....	....	..	U24
....	1..4	....	....	....	....	....	..	U20
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

CONFIG. N.
IND. REV.

PIASTRA-BOARD TISE 2B I 0610056 C

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
...4	....	....	....	....	....	....	1.	U30
....	....	....	....	....	....	....	1.	U30
....	....	....	....	....	1...	...4	..	U14
....	....	....	1...	.2..	....	...4	..	U19 U20
....	....	....	1...	....	....	...4	..	U18
....	...4	....	....	....	....	...4	..	U15
....	....	....	....	....	....	...4	..	U13 U15
....	....	....	....	....	1...	..3.	..	U14
....	1...	1..4	....	.2.4	....	..3.	..	U25
....	..3.	...4	....	...4	....	..3.	..	U25 U29
....	1...	1..4	....	.2..	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	1...	1..4	....	....	....	..3.	..	U24
....	....	1..4	....	....	....	..3.	..	U24 U29
....	..3.	...4	....	....	....	..3.	..	U18
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U21 U22 U23 U24 U27 U28
....	1..4	....	....	.2.4	....	....	..	U25
....	....	....	....	...4	....	....	..	U25
....	1...	....	....	.2..	....	....	..	U19
....	....	....	....	.2..	....	....	..	U19
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	1..4	....	....	....	....	....	..	U19 U20
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

COPIE A:
TO:
IND. REV.

PIASTRA-BOARD TISE 28 I 0610056 C

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	...4	..	U14
....	....	....	1...	.2..	....	...4	..	U19 U20
....	....	....	1...	....	....	...4	..	U18
....	...4	....	....	....	....	...4	..	U15
....	....	....	....	....	....	...4	..	U13 U15
....	....	....	....	....	1...	..3.	..	U14
....	1...	1..4	....	.2.4	....	..3.	..	U25
....	..3.	...4	....	...4	....	..3.	..	U25 U29
....	1...	1..4	....	.2..	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	1...	1..4	....	....	....	..3.	..	U24
....	....	1..4	....	....	....	..3.	..	U24 U29
....	..3.	...4	....	....	....	..3.	..	U18
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U21 U22 U23 U24 U27 U28
....	1...	1..4	....	.2.4	....	....	..	U25
....	....	....	....	...4	....	....	..	U25
....	....	....	1...	.2..	....	....	..	U20
....	1...	1..4	....	.2..	....	....	..	U25
....	1...	....	....	.2..	....	....	..	U19
....	....	....	....	.2..	....	....	..	U19
....	....	....	1...	....	....	....	..	U17
....	....	1..4	....	....	....	....	..	U29
....	....	1...	....	....	....	....	..	U24
....	1..4	....	....	....	....	....	..	U19 U20
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

PIASTRA-BOARD TISE 28 I 0610U56 C

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	...4	..	U14
....	...4	....	....	....	....	...4	..	U15
....	....	....	....	....	....	...4	..	U13 U15 U18 U19 U20
....	....	....	....	....	1...	..3.	..	U14
....	...3	....	....	...4	....	..3.	..	U25
....	1.3.	1...	....	.2..	....	..3.	..	U25
....	..3.	....	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U29
....	....	....	....	....	....	..3.	..	U13 U14 U17 U18 U24 U25 U29
....	....	....	....	....	1...	....	..	U21 U22 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	1...	....	....	.2..	....	....	..	U20
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	...4	1..4	....	....	....	....	..	U29
....	....	...4	....	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15 U19
....	.3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U20 U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

PIASTRA-BOARD TISE 28 I 0610056 C

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	...4	..	U14
....	....	....	....	.2..	....	...4	..	U20
....	....	....	....	....	....	...4	..	U13 U15 U18 U19 U20
....	....	....	....	....	1...	..3.	..	U14
....	...4	1..4	....	.2.4	....	..3.	..	U25
....	...4	1..4	....	.2..	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U29
....	1.34	...4	....	....	....	..3.	..	U25
....	....	...4	....	....	....	..3.	..	U17
....	....	1...	....	....	....	..3.	..	U24
....	....	....	....	....	....	..3.	..	U13 U14 U18 U24 U25 U29
....	....	....	....	....	1...	....	..	U21 U22 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	...4	1..4	....	.2..	....	....	..	U25
....	...4	....	....	.2..	....	....	..	U19
....	....	....	....	.2..	....	....	..	U19
....	....	....	1...	....	....	....	..	U17
....	...4	1..4	....	....	....	....	..	U29
....	1.34	...4	....	....	....	....	..	U20
....	..3.	...4	....	....	....	....	..	U18
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

PIASTRA-BOARD TISE 28 I 0610056 C

PROVA-TEST = A

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	...4	..	U14
....	...4	....	....	....	....	...4	..	U15
....	....	....	....	....	....	...4	..	U13 U15 U18 U19 U20
....	....	....	....	....	1...	..3.	..	U14
....	....	....	....	...4	....	..3.	..	U25
....	..3.	....	....	.2..	....	..3.	..	U25
....	....	....	1...	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U29
....	....	....	....	....	....	..3.	..	U13 U14 U17 U18 U24 U25 U29
....	....	....	....	....	1...	....	..	U21 U22 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	1...	....	....	.2..	....	....	..	U20
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	...4	1..4	....	....	....	....	..	U29
....	....	...4	....	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U20 U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

PIASTRA-BOARD TISE 28 I 0610056 C

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	...4	..	U14
....	...4	....	....	....	....	...4	..	U15
....	....	....	....	....	....	...4	..	U13 U15 U18 U19 U20
....	....	....	....	....	1...	..3.	..	U14
....	....	....	....	...4	....	..3.	..	U25
....	1.3.	1...	....	.2..	....	..3.	..	U25
....	..3.	....	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U29
....	....	....	....	....	....	..3.	..	U13 U14 U17 U18 U24 U25 U29
....	....	....	....	....	1...	....	..	U21 U22 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	1...	....	....	.2..	....	....	..	U20
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	...4	1..4	....	....	....	....	..	U24 U29
....	....	...4	....	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U19 U20 U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

PIASTRA-BOARD TISE 25 I 0610056 C

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	....	..34	..	U13 U14
....	...4	....	....	....	....	...4	..	U15
....	....	....	....	....	....	...4	..	U13 U15
....	...4	1..4	....	....	....	..3.	..	U24 U29
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U14 U21 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	1.3.	1...	....	.2..	....	....	..	U25
....	1...	....	....	.2..	....	....	..	U20
....	....	....	....	.2..	....	....	..	U19 U20
....	..3.	....	1...	....	....	....	..	U17
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U19 U20 U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

PIASTRA-BOARD TISE 28 I 0610056 C

PRUVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	....	..34	..	U13 U14
....	...4	....	....	....	....	...4	..	U15
....	....	....	....	....	....	...4	..	U13 U15
....	...4	1..4	....	....	....	..3.	..	U24 U29
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U14 U21 U23 U24 U27 U28
....	1...	....	....	.2.4	....	....	..	U25
....	....	....	....	...4	....	....	..	U25 U29
....	1.3.	1...	....	.2..	....	....	..	U25
....	1...	....	....	.2..	....	....	..	U20
....	....	....	....	.2..	....	....	..	U19 U20
....	.3.	....	1...	....	....	....	..	U17
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15 U19
....	.3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U19 U20 U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

COPIE A:
IND. TO:
REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

N° 400240000

EMISS. AUG 1 1968

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

PIASTRA-BOARD TISE 28 I 0610056 C

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	....	..34	..	U13 U14
....	...4	....	....	....	....	...4	..	U15
....	....	....	....	....	....	...4	..	U13 U15
....	....	...4	....	....	....	..3.	..	U17
....	..3.	1...	....	....	....	..3.	..	U29
....	....	....	....	....	....	..3.	..	U13 U14 U24 U29
....	1...	....	....	....	1...	....	..	U24
....	....	....	....	....	1...	....	..	U14 U21 U23 U24 U27 U28
....	1...	....	....	.2,4	....	....	..	U25
....	....	....	....	...4	....	....	..	U25 U29
....	1...	....	....	.2..	....	....	..	U25
....	....	....	....	.2..	....	....	..	U19 U20
....	..3.	....	1...	....	....	....	..	U17
....	....	....	1...	....	....	....	..	U17
....	..3.	1...	....	....	....	....	..	U25
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15
....	..3.	....	....	....	....	....	..	U17 U18
....	1...	....	....	....	....	....	..	U20 U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

COMPLET. NO. REV.

REVISION

UNIT K270

COMPIL. GE 425 APPR.

SEZ. SPS - OGE

LOC. PREGNANA (MI)

EMISS. AUG 1 1968

Nº 400240000

PIASTRA-BOARD TISE 28 I 0610056 G

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	....	..34	..	U13 U14
....	...4	....	....	....	....	...4	..	U15
....	....	....	....	....	....	...4	..	U13 U15
....	....	1..4	1...	....	....	...3	..	U29
....	....	...4	....	....	....	...3	..	U17
....	....	....	....	....	....	...3	..	U13 U14 U24 U29
....	1...	....	....	....	1...	....	..	U24
....	....	....	....	....	1...	....	..	U14 U21 U23 U24
								U27 U28
....	1...	....	....	...4	....	....	..	U25
....	....	....	....	...4	....	....	..	U25 U29
....	.3..	1...	....	.2..	....	....	..	U25
....	....	....	....	.2..	....	....	..	U19 U20
....	.3..	....	1...	....	....	....	..	U17
....	....	....	1...	....	....	....	..	U17 U18
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15
....	.3..	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U20 U24 U25
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

PIASTRA-BOARD TISE 28 I 0610056 C

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	..34	..	U14
....	....	....	....	....	....	..34	..	U13 U14
....	...4	....	....	....	....	...4	..	U15
....	....	....	....	....	....	...4	..	U13 U15
....	....	....	....	....	....	..3.	..	U13 U14 U17 U24 U29
....	1...	1...	....	....	1...	....	..	U24
....	....	....	....	....	1...	....	..	U14 U21 U23 U24
								U27 U28
....	1...	1..4	1...	...4	....	....	..	U25
....	....	....	....	...4	....	....	..	U25 U29
....	..3.	...4	1...	.2..	....	....	..	U20 U25
....	....	....	....	.2..	....	....	..	U19
....	1...	1..4	1...	....	....	....	..	U25
....	....	1..4	1...	....	....	....	..	U29
....	1..4	....	1...	....	....	....	..	U20
....	....	....	1...	....	....	....	..	U17 U18 U19
....	..3.	...4	....	....	....	....	..	U17 U18
....	....	...4	....	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

COPIE A:
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE

LOC. PREGNANA (MI)

N° 400240000

EMISS. AUG 1,1968

CONT. SU FO. 735 FO. 734

PIASTRA-BOARD TISE 28 I 0610056 C

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	..34	..	U14
....	1...	1..4	1...	...4	....	..34	..	U25
....	..3.	...4	1...	.2..	....	..34	..	U20 U25
....	1...	1..4	1...	....	....	..34	..	U25
....	....	1..4	1...	....	....	..34	..	U29
....	....	....	....	....	....	..34	..	U14
....	1..4	....	1...	....	....	...4	..	U20
....	....	....	1...	....	....	...4	..	U16 U19
....	....	....	....	....	....	...4	..	U13 U15
....	..3.	...4	....	....	....	..3.	..	U17 U18
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U14 U21 U22 U23 U24 U27 U28
....	....	....	....	..4	....	....	..	U25 U29
....	....	....	....	.2..	....	....	..	U19
....	....	....	1...	....	....	....	..	U17
....	1...	1...	....	....	....	....	..	U24
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

PIASTRA-BOARD TISE 28 I 0610056 C

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	..34	..	U14
....	1...	1..4	1...	...4	....	..34	..	U25
....	..3.	...4	1...	.2..	....	..34	..	U20 U25
....	1...	1..4	1...	....	....	..34	..	U25
....	....	1..4	1...	....	....	..34	..	U29
....	....	....	....	....	....	..34	..	U14
....	1..4	....	1...	....	....	...4	..	U20
....	....	....	1...	....	....	...4	..	U18 U19
....	....	....	....	....	....	...4	..	U13 U15
....	..3.	...4	....	....	....	..3.	..	U17 U18
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U14 U21 U22 U23
								U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	....	....	....	.2..	....	....	..	U19
....	....	....	1...	....	....	....	..	U17
....	1...	1...	....	....	....	....	..	U24
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

PIASTRA-BOARD TISE 28 I 0610056 C

PROVA-TEST = 17

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	..34	..	U14
....	1...	....	....	...4	....	..34	..	U25
....	..3.	1...	....	.2..	....	..34	..	U25
....	....	....	....	.2..	....	..34	..	U20
....	1...	....	....	....	....	..34	..	U25
....	....	....	....	....	....	..34	..	U14 U29
....	1...	....	....	....	....	...4	..	U20
....	....	....	....	....	....	...4	..	U13 U15 U18 U19
....	..3.	....	1...	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14 U17 U18
....	....	....	....	....	1...	....	..	U14 U21 U22 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	....	....	....	2...	....	....	..	U19
....	....	1..4	1...	....	....	....	..	U29
....	....	....	1...	....	....	....	..	U17 U18
....	....	...4	....	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

COPIE A: TO:

IND. REV.

REVISION

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

EMISS. AUG 1 1968

Nº 400240000

CONT. SU FO. 738 FO. 737

PIASTRA-BOARD TISE 2B I 0610056 C

PROVA-TEST = 18

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	..34	..	U14
....	1...	....	....	...4	....	..34	..	U25
....	..3.	....	....	.2..	....	..34	..	U25
....	....	....	....	.2..	....	..34	..	U20
....	1...	....	....	....	....	..34	..	U25
....	....	....	....	....	....	..34	..	U14 U29
....	1...	....	....	....	....	...4	..	U20
....	....	....	....	....	....	...4	..	U13 U15 U18 U19
....	..3.	....	1...	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14 U17 U18
....	....	....	....	....	1...	....	..	U14 U21 U22 U23
								U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	....	....	....	.2..	....	....	..	U19
....	....	...4	1...	....	....	....	..	U29
....	....	....	1...	....	....	....	..	U17 U18
....	....	...4	....	....	....	....	..	U17
....	....	....	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

PIASTRA-BOARD TISE 28 I 0610056 C

PROVA-TEST = 19

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	..34	..	U14
....	1...	....	....	...4	....	..34	..	U25
....	..3.	1...	....	.2..	....	..34	..	U25
....	....	....	....	.2..	....	..34	..	U20
....	1...	....	....	....	....	..34	..	U25
....	....	....	....	....	....	..34	..	U14 U29
....	1...	....	....	....	....	...4	..	U20
....	....	....	....	....	....	...4	..	U13 U15 U18 U19
....	..3.	....	1...	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14 U17 U18
....	....	....	....	....	1...	....	..	U14 U21 U22 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	....	....	....	.2..	....	....	..	U19
....	....	1..4	1...	....	....	....	..	U29
....	....	....	1...	....	....	....	..	U17 U18
....	....	...4	....	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

CORRETTO / INDICE REV.

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1,1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 740 FO. 739

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

PIASTRA-BOARD TISE 28 I 0610056 C

PROVA-TEST = 20

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	1...	....	....	...4	....	..34	..	U25
....	..3.	1...	....	.2..	....	..34	..	U25
....	....	....	....	.2..	....	..34	..	U20
....	1...	....	....	....	....	..34	..	U25
....	....	....	....	....	....	..34	..	U14 U29
....	1...	....	....	....	....	...4	..	U20
....	....	....	....	....	....	...4	..	U13 U15 U18 U19
....	..3.	....	1...	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14 U17 U18
....	1...	....	....	....	1...	....	..	U24
....	....	....	....	....	1...	....	..	U24 U28
....	....	....	....	...4	....	....	..	U25 U29
....	....	....	....	.2..	....	....	..	U19
....	....	1..4	1...	....	....	....	..	U29
....	....	....	1...	....	....	....	..	U17 U18
....	....	...4	....	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

COPIE A:
IND.
REV.

UNIT K270

COMPIL. GE 425

APPR.

SIZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1.1968

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

CONT. SU FO. 742 FO. 741

PIASTRA-BOARD TISE 28 II 0610056 C

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	1..4	....	1...	....	....	...4	..	U20
....	....	....	1...	....	....	...4	..	U16
....	....	....	....	....	....	...4	..	U13 U14 U15
....	1.34	...4	....	.2.4	....	..3.	..	U25
....	...4	1..4	....	...4	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U25 U29
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	1...	....	....	1...	....	..	U24
....	....	....	....	....	1...	....	..	U21 U22 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	1..4	....	....	.2..	....	....	..	U20
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
...x	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

COPIE A:
IND. REV. TO:

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

CONT. SU FO. 742 FO. 741

PIASTRA-BOARD TISE 28 II 0610056 C

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	1..4	....	1...	....	....	...4	..	U19 U20
....	....	....	1...	....	....	...4	..	U18
....	....	....	....	....	....	...4	..	U13 U14 U15
....	...4	1..4	....	....	1...	..3.	..	U24
....	1.34	...4	....	.2.4	....	..3.	..	U25
....	...4	1..4	....	...4	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U24 U25 U29
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	1..4	....	....	.2..	....	....	..	U20
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

PIASTRA-BOARD TISE 2H II 0610056 C

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	1..4	....	1...	....	....	...4	..	U19 U20
....	....	....	1...	....	....	...4	..	U18
....	....	....	....	....	....	...4	..	U13 U14 U15
....	...4	1..4	....	....	1...	...3.	..	U24
....	1.34	...4	....	.2.4	....	...3.	..	U25
....	...4	1..4	....	...4	....	...3.	..	U25
....	..3.	...4	1...	....	....	...3.	..	U17
....	...4	1..4	....	....	....	...3.	..	U24 U25 U29
....	....	...4	....	....	....	...3.	..	U17
....	....	....	....	....	....	...3.	..	U13 U14
....	....	....	....	....	1...	....	..	U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	1..4	....	....	.2..	....	....	..	U20
....	....	....	....	.2..	....	....	..	U19 U20 U25
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

PIASTRA-BOARD TISE 2B II 0610056 C

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	1..4	....	....	....	....	...4	..	U20
....	...4	....	....	....	....	...4	..	U19
....	....	....	....	....	....	...4	..	U13 U14 U15 U18 U20
....	....	1...	....	....	1...	..3.	..	U24
....	....	....	....	....	1...	..3.	..	U14
....	...4	1..4	....	.2.4	....	..3.	..	U25
....	1.34	...4	....	...4	....	..3.	..	U25
....	...4	1..4	....	.2..	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U29
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14 U24 U29
....	....	....	....	....	1...	....	..	U14 U22 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	...4	....	....	.2..	....	....	..	U19
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	...4	1...	....	....	....	....	..	U24
....	1..4	....	....	....	....	....	..	U20
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

PIASTRA-BOARD TISE 28 II 0610056 C

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	1..4	....	....	....	....	...4	..	U19 U20
....	....	....	....	....	....	...4	..	U13 U14 U15 U18
....	...4	1..4	....	....	1...	...3.	..	U24
....	....	....	....	....	1...	...3.	..	U14
....	...4	1..4	....	.2.4	....	...3.	..	U25
....	1.34	...4	....	...4	....	...3.	..	U25
....	...4	1..4	....	.2..	....	...3.	..	U25
....	..3.	...4	1...	....	....	...3.	..	U17
....	...4	1..4	....	....	....	...3.	..	U24 U29
....	....	...4	....	....	....	...3.	..	U17
....	....	....	....	....	....	...3.	..	U13 U14
....	....	....	....	....	1...	....	..	U14 U22 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	...4	....	....	.2..	....	....	..	U19
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	....	....	....	....	....	....	..	U24
....	1..4	....	....	....	....	....	..	U20
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

COPIE A:
IND. REF.

REVISION

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

№ 400240000

EMISS. AUG 1 1968

CONT. SU FO. 746 FO. 745

PIASTRA-BOARD TISE 28 II 0610056 C

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	....	...4	..	U13 U14 U15
....	...4	1..4	....	....	1...	..3.	..	U24
....	....	....	....	....	1...	..3.	..	U14
....	...4	1..4	....	.2.4	....	..3.	..	U25
....	1.34	...4	....	...4	....	..3.	..	U25
....	...4	1..4	....	.2..	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U24 U29
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U14 U21 U22 U23
								U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	...4	....	....	.2..	....	....	..	U19
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	1..4	....	....	....	....	....	..	U19 U20
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

COPIE AI TO:
IND. REV.

COMPIL. GE 425	APPR.	UNIT K270	
EMISS. AUG 1.1968		SEZ. SPS - OGE LOC. PREGNANA (MI)	Nº 400240000 CONT. SU FO. 747 FO. 746

PIASTRA-BOARD TISE 28 II 0610056 C

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	····	····	····	····	····	····	·2	U27
····	····	····	····	····	····	···4	··	U13 U14 U15
····	···4	1··4	····	····	1···	··3·	··	U24
····	····	····	····	····	1···	··3·	··	U14
····	···4	1··4	····	·2·4	····	··3·	··	U25
····	1·34	···4	····	···4	····	··3·	··	U25
····	···4	1··4	····	·2··	····	··3·	··	U25
····	··3·	···4	1···	····	····	··3·	··	U17
····	···4	1··4	····	····	····	··3·	··	U24 U29
····	····	···4	····	····	····	··3·	··	U17
····	····	····	····	····	····	··3·	··	U13 U14
····	····	····	····	····	1···	····	··	U14 U21 U22 U23 U24 U27 U28
····	····	····	····	···4	····	····	··	U25 U29
····	···4	····	····	·2··	····	····	··	U19
····	····	····	····	·2··	····	····	··	U19 U20
····	····	····	1···	····	····	····	··	U17
····	····	1···	····	····	····	····	··	U24
····	1··4	····	····	····	····	····	··	U19 U20
····	···4	····	····	····	····	····	··	U15 U19
····	··3·	····	····	····	····	····	··	U17
····	1···	····	····	····	····	····	··	U24
···4	····	····	····	····	····	····	··	U30
····	X.XX	X..X	X···	.X.X	····	··XX	··	U25

PIASTRA-BOARD TISE 2B II 0610056 C

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	....	...4	..	U13 U14 U15
....	....	1...	....	....	1...	..3.	..	U24
....	....	....	....	....	1...	..3.	..	U14
....	...4	1..4	....	.2.4	....	..3.	..	U25
....	1.34	...4	....	...4	....	..3.	..	U25
....	...4	1..4	....	.2..	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U29
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14 U24 U29
....	....	....	....	....	1...	....	..	U14 U21 U22 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	...4	....	....	.2..	....	....	..	U19
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	4...	1...	....	....	....	....	..	U24
....	1..4	....	....	....	....	....	..	U20
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

PIASTRA-BOARD TISE 28 II 0610056 C

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	....	...4	..	U13 U14 U15
....	...4	1..4	....	....	1...	..3.	..	U24
....	...4	....	....	....	1...	..3.	..	U14
....	...4	1..4	....	.2.4	....	..3.	..	U25
....	1.34	1..4	....	...4	....	..3.	..	U25
....	...4	1..4	....	.2..	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U24 U29
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U14 U21 U22 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	...4	....	....	.2..	....	....	..	U19
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	1..4	....	....	....	....	....	..	U19 U20
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

COPIE A:
IND. REV.

UNIT K27A

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1 1968

PIASTRA-BOARD TISE 28 II 0610056 C

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	...4	..	U14
....	....	....	....	....	....	...4	..	U13 U15
....	....	....	....	....	1...	..3.	..	U14
....	...4	1..4	....	.2.4	....	..3.	..	U25
....	1.34	...4	....	...4	....	..3.	..	U25
....	...4	1..4	....	.2..	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U24 U29
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U14 U21 U22 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	...4	....	....	.2..	....	....	..	U19
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	1..4	....	....	....	....	....	..	U19 U20
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

COPIE A:
TOT.
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 40024000

EMISS. AUG 1,1968

CONT. SU FO. 751 FO. 750

PIASTRA-BOARD TISE 28 II 0610056 C

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	...4	..	U14
....	....	....	....	....	....	...4	..	U13 U15
....	....	....	....	....	1...	..3.	..	U14
....	...4	1..4	....	.2.4	....	..3.	..	U25
....	1.34	...4	....	...4	....	..3.	..	U25
....	...4	1..4	....	.2..	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U24 U29
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U14 U21 U22 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	...4	....	....	.2..	....	....	..	U19
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	1..4	....	....	....	....	....	..	U19 U20
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	/U25

REVISION

COPIE AL TOT. NRO. REV.

COMPIL. GE 425	APPR.	UNIT K270	
EMISS. AUG 1,1968		SEZ. SPS - OGE SEC. LOC. PREGNANA (MI)	Nº 400240000 CONT. SU FO. 752 FO. 751

PIASTRA-BOARD TISE 28 II 0610056 C

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	...4	..	U14
....	....	....	....	....	....	...4	..	U13 U15
....	....	....	....	....	1...	..3.	..	U14
....	...4	1..4	....	.2.4	....	..3.	..	U25
....	1.34	...4	....	...4	....	..3.	..	U25
....	...4	1..4	....	.2..	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U29
....	....	...4	....	....	....	..3.	..	U17
....	....	1...	....	....	....	..3.	..	U24
....	....	....	....	....	....	..3.	..	U13 U14 U24 U29
....	....	....	....	....	1...	....	..	U14 U21 U22 U23
								U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	...4	....	....	.2..	....	....	..	U19
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	1..4	....	....	....	....	....	..	U28
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

PIASTRA-BOARD TISE 28 II 0618050 C

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	1...	...4	..	U14
....	....	....	....	....	....	...4	..	U13 U15
....	....	....	....	....	1...	..3.	..	U14
....	...4	1..4	....	.2.4	....	..3.	..	U25
....	1.34	...4	....	..2.4	....	..3.	..	U25
....	...4	1..4	....	.2..	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U24 U29
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U14 U21 U22 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	...4	....	....	.2..	....	....	..	U19
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	1..4	....	....	....	....	....	..	U19 U20
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

PIASTRA-BOARD TISE 28 II 0610056 C

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U27
....	....	....	....	....	....	...4	..	U13 U14 U15
....	...4	1..4	....	....	1...	..3.	..	U24
....	....	....	....	....	1...	..3.	..	U14
....	...4	1..4	....	.2.4	....	..3.	..	U25
....	1.34	...4	....	...4	....	..3.	..	U25
....	...4	1..4	....	.2..	....	..3.	..	U25
....	..3.	...4	1...	....	....	..3.	..	U17
....	...4	1..4	....	....	....	..3.	..	U24 U29
....	....	...4	....	....	....	..3.	..	U17
....	....	....	....	....	....	..3.	..	U13 U14
....	....	....	....	....	1...	....	..	U14 U21 U22 U23 U24 U27 U28
....	....	....	....	...4	....	....	..	U25 U29
....	...4	....	....	.2..	....	....	..	U19
....	....	....	....	.2..	....	....	..	U19 U20
....	....	....	1...	....	....	....	..	U17
....	....	1...	....	....	....	....	..	U24
....	1..4	....	....	....	....	....	..	U19 U20
....	...4	....	....	....	....	....	..	U15 U19
....	..3.	....	....	....	....	....	..	U17
....	1...	....	....	....	....	....	..	U24
...4	....	....	....	....	....	....	..	U30
....	X.XX	X..X	X...	.X.X	....	..XX	..	U25

REVISION

PIASTRA-BOARD TRIN 2A 0610072 D

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	V01
....	....	....	....	....	....	...4	..	V02
....	....	....	....	....	....	..3.	..	V03
....	....	....	....	....	....	.2..	..	V04
....	....	....	....	....	....	1...	..	V05
....	....	....	....	....	...4	....	..	V06
....	....	....	....	....	..3.	....	..	V07
....	....	....	....	....	.2..	....	..	V08
....	....	....	....	....	1...	....	..	V09
....	....	....	....	...4	....	....	..	V10
....	....	....	....	..3.	....	....	..	V11
....	....	....	....	.2..	....	....	..	V12
....	....	....	....	1...	....	....	..	V14
....	....	....	...4	....	....	....	..	V13

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

PIASTRA-BOARD TRIM 2A 0610072 D

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS							GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	V01
....	....	....	....	....	....	...4	..	V02
....	....	....	....	....	....	..3.	..	V03
....	....	....	....	....	....	.2..	..	V04
....	....	....	....	....	....	1...	..	V05
....	....	....	....	....	...4	....	..	V06
....	....	....	....	....	..3.	....	..	V07
....	....	....	....	....	.2..	....	..	V08
....	....	....	....	....	1...	....	..	V09
....	....	....	....	...4	....	....	..	V10
....	....	....	....	..3.	....	....	..	V11
....	....	....	....	.2..	....	....	..	V12
....	....	....	....	1...	....	....	..	V14
....	....	....	...4	....	....	....	..	V13

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

PIASTRA-BOARD TRIN 2A 0610072 D

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	V01
....	....	....	....	....	....	...4	..	V02
....	....	....	....	....	....	..3.	..	V03
....	....	....	....	....	....	.2..	..	V04
....	....	....	....	....	....	1...	..	V05
....	....	....	....	....	...4	....	..	V06
....	....	....	....	....	..3.	....	..	V07
....	....	....	....	....	.2..	....	..	V08
....	....	....	....	....	1...	....	..	V09
....	....	....	....	...4	....	....	..	V10
....	....	....	....	..3.	....	....	..	V11
....	....	....	....	.2..	....	....	..	V12
....	....	....	....	1...	....	....	..	V14
....	....	....	...4	....	....	....	..	V13

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

PIASTRA-BOARD TRIN 2A 0610072 D

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	V01
....	....	....	....	....	....	...4	..	V02
....	....	....	....	....	....	..3.	..	V03
....	....	....	....	....	....	.2..	..	V04
....	....	....	....	....	....	1...	..	V05
....	....	....	....	....	...4	....	..	V06
....	....	....	....	....	..3.	....	..	V07
....	....	....	....	....	.2..	....	..	V08
....	....	....	....	....	1...	....	..	V09
....	....	....	....	...4	....	....	..	V10
....	....	....	....	..3.	....	....	..	V11
....	....	....	....	.2..	....	....	..	V12
....	....	....	....	1...	....	....	..	V14
....	....	....	...4	....	....	....	..	V13

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

PIASTRA-BOARD TRIN 2A 0610072 D

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	.....	....	....	....	....	....	1.	V01
....	.....	....	....	....	....	...4	..	V02
....	.....	....	....	....	.....	..3.	..	V03
....	.....	....	....	....	.....	.2..	..	V04
....	.....	....	....	....	....	1...	..	V05
....	.....	....	....	....	...4	....	..	V06
....	.....	....	....	....	..3.	....	..	V07
....	.....	....	....	....	.2..	....	..	V08
....	.....	....	....	....	1...	....	..	V09
....	.....	....	....	...4	....	....	..	V10
....	.....	....	....	..3.	....	....	..	V11
....	.....	....	....	.2..	....	....	..	V12
....	.....	....	....	1...	....	....	..	V14
....	.....	....	...4	....	....	....	..	V13

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

REVISION

COPIE A: IND. REV. TO:

PIASTRA-BOARD TKIN 2A 0610072 D

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	V01
....	....	....	....	....	....	...4	..	V02
....	....	....	....	....	....	..3.	..	V03
....	....	....	....	....	....	.2..	..	V04
....	....	....	....	....	....	1...	..	V05
....	....	....	....	....	...4	....	..	V06
....	....	....	....	....	..3.	....	..	V07
....	....	....	....	....	.2..	....	..	V08
....	....	....	....	....	1...	....	..	V09
....	....	....	....	...4	....	....	..	V10
....	....	....	....	..3.	....	....	..	V11
....	....	....	....	.2..	....	....	..	V12
....	....	....	....	1...	....	....	..	V14
....	....	....	...4	....	....	....	..	V13

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

PIASTRA-BOARD TRIN 2A 0610072 D

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	V01
....	....	....	....	....	....	...4	..	V02
....	....	....	....	....	....	..3.	..	V03
....	....	....	....	....	....	.2..	..	V04
....	....	....	....	....	....	1...	..	V05
....	....	....	....	....	...4	....	..	V06
....	....	....	....	....	..3.	....	..	V07
....	....	....	....	....	.2..	....	..	V08
....	....	....	....	....	1...	....	..	V09
....	....	....	....	...4	....	....	..	V10
....	....	....	....	..3.	....	....	..	V11
....	....	....	....	.2..	....	....	..	V12
....	....	....	....	1...	....	....	..	V14
....	....	....	...4	....	....	....	..	V13

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

COPIE A:
TO:
AND REV.

REVISION

PIASTRA-BUARD TRIN 2A 0610072 0

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	V01
....	....	....	....	....	....	...4	..	V02
....	....	....	....	....	....	..3.	..	V03
....	....	....	....	....	....	.2..	..	V04
....	....	....	....	....	....	1...	..	V05
....	....	....	....	....	...4	....	..	V06
....	....	....	....	....	..3.	....	..	V07
....	....	....	....	....	.2..	....	..	V08
....	....	....	....	....	1...	....	..	V09
....	....	....	....	...4	....	....	..	V10
....	....	....	....	..3.	....	....	..	V11
....	....	....	....	.2..	....	....	..	V12
....	....	....	....	1...	....	....	..	V14
....	....	....	...4	....	....	....	..	V13

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

REVISION

PIASTRA-BOARD TRIN 2A 0610072 D

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	V01
....	....	....	....	....	....	...4	..	V02
....	....	....	....	....	....	..3.	..	V03
....	....	....	....	....	....	.2..	..	V04
....	....	....	....	....	....	1...	..	V05
....	....	....	....	....	...4	....	..	V06
....	....	....	....	....	..3.	....	..	V07
....	....	....	....	....	.2..	....	..	V08
....	....	....	....	....	1...	....	..	V09
....	....	....	....	...4	....	....	..	V10
....	....	....	....	..3.	....	....	..	V11
....	....	....	....	.2..	....	....	..	V12
....	....	....	....	1...	....	....	..	V14
....	....	....	...4	....	....	....	..	V13

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

COPIE AI: TOL. REV.

REVISION

PIASTRA-BOARD TRIN 2A 0618072 0

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	V01
....	....	....	....	....	....	...4	..	V02
....	....	....	....	....	....	..3.	..	V03
....	....	....	....	....	....	.2..	..	V04
....	....	....	....	....	....	1...	..	V05
....	....	....	....	....	...4	....	..	V06
....	....	....	....	....	..3.	....	..	V07
....	....	....	....	....	.2..	....	..	V08
....	....	....	....	....	1...	....	..	V09
....	....	....	....	...4	....	....	..	V10
....	....	....	....	..3.	....	....	..	V11
....	....	....	....	.2..	....	....	..	V12
....	....	....	....	1...	....	....	..	V14
....	....	....	...4	....	....	....	..	V13

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

PIASTRA-GUIDA TRIM ZA 8810072 D

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	V01
....	....	....	....	....	....	...4	..	V02
....	....	....	....	....	....	..3.	..	V03
....	....	....	....	....	....	.2..	..	V04
....	....	....	....	....	....	1...	..	V05
....	....	....	....	....	...4	....	..	V06
....	....	....	....	....	..3.	....	..	V07
....	....	....	....	....	.2..	....	..	V08
....	....	....	....	....	1...	....	..	V09
....	....	....	....	...4	....	....	..	V10
....	....	....	....	..3.	....	....	..	V11
....	....	....	....	.2..	....	....	..	V12
....	....	....	....	1...	....	....	..	V14
....	....	....	...4	....	....	....	..	V13

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

PIASTRA-BOARD TRIN 2A 0610072 D

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	V01
....	....	....	....	....	....	...4	..	V02
....	....	....	....	....	....	..3.	..	V03
....	....	....	....	....	....	.2..	..	V04
....	....	....	....	....	....	1...	..	V05
....	....	....	....	....	...4	....	..	V06
....	....	....	....	....	..3.	....	..	V07
....	....	....	....	....	.2..	....	..	V08
....	....	....	....	....	1...	....	..	V09
....	....	....	....	...4	....	....	..	V10
....	....	....	....	..3.	....	....	..	V11
....	....	....	....	.2..	....	....	..	V12
....	....	....	....	1...	....	....	..	V14
....	....	....	...4	....	....	....	..	V13

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

REVISION

COPIE AL FO.

IND. REV.

PIASTRA-BOARD TRIN 2A 0610072 D

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	V01
....	....	....	....	....	....	...4	..	V02
....	....	....	....	....	....	..3.	..	V03
....	....	....	....	....	....	.2..	..	V04
....	....	....	....	....	....	1...	..	V05
....	....	....	....	....	...4	....	..	V06
....	....	....	....	....	..3.	....	..	V07
....	....	....	....	....	.2..	....	..	V08
....	....	....	....	....	1...	....	..	V09
....	....	....	....	...4	....	....	..	V10
....	....	....	....	..3.	....	....	..	V11
....	....	....	....	.2..	....	....	..	V12
....	....	....	....	1...	....	....	..	V14
....	....	....	...4	....	....	....	..	Vt3

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

COPIE A:
IND. TEST

REVISION

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
LOC. PREGNANA (MI)

Nº 4100240000

EMISS. AUG 1 1968

PIASTRA-GUARD TRIN 2A 0610072 D

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	V01
....	....	....	....	....	....	...4	..	V02
....	....	....	....	....	....	..3.	..	V03
....	....	....	....	....	....	.2..	..	V04
....	....	....	....	....	....	1...	..	V05
....	....	....	....	....	...4	....	..	V06
....	....	....	....	....	..3.	....	..	V07
....	....	....	....	....	.2..	....	..	V08
....	....	....	....	....	1...	....	..	V09
....	....	....	....	...4	....	....	..	V10
....	....	....	....	..3.	....	....	..	V11
....	....	....	....	.2..	....	....	..	V12
....	....	....	....	1...	....	....	..	V14
....	....	....	...4	....	....	....	..	V13

NOTA: premere due volte il tasto START

NOTE: depress the START switch twice

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

FIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U05
....	....	....	....	....	....	....	1.	U24 U29 U30
....	..3.	....	....	....	.2..	....	..	U10
....	....	....	....	....	.2..	....	..	U03 U04 U12 U26
....	....	....	...4	....	....	....	..	U02 U03 U13 U18 U23
....	....	....	..3.	....	....	....	..	U08 U11 U13 U16
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U01 U12 U22

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	...4	....	....	....	.2	U05 U30
....	....	....	....	....	....	....	.2	U21
....	....	....	....	....	....	....	1.	U24 U29 U30
....	....	....	...4	....	.2..	....	..	U07 U14 U15 U23
....	....	....	....	....	.2..	....	..	U04 U07 U14 U16
....	....	....	...4	....	....	....	..	U02 U07 U08 U10
								U11 U14 U16 U20
								U21 U24 U26
....	....	....	..3.	....	....	....	..	U08 U13
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U17 U22

REVISION

COPIE A:
TO:
IND.
REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

CONT. SU FO. 778 FO. 777

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	...4	....	....	....	.2	U05 U30
....	....	....	....	....	....	....	.2	U21
....	....	....	....	....	....	....	1.	U24 U29 U30
....	....	....	...4	....	.2..	....	..	U07 U14 U15 U16
....	....	....	....	....	.2..	....	..	U04 U07 U14 U16 U18 U23
....	....	....	...4	....	....	....	..	U02 U07 U08 U10 U11 U14 U15 U16 U20 U21 U24 U26
....	....	....	..3.	....	....	....	..	U08 U28 U30
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U17 U22

COPIE A: / TO: / IND. / REV.

REVISION

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	..3.	....	...4	....	....	....	.2	U05 U09 U21 U27 U30
....	....	....	....	....	....	....	1.	U24 U29 U30
....	....	....	....	....	.2..	....	..	U21 U26
....	..3.	....	...4	....	....	....	..	U08 U10 U11 U14
....	....	....	...4	....	....	....	..	U02 U03 U07 U08 U09 U10 U11 U13 U14 U16 U20 U22 U24 U27
....	....	....	..3.	....	....	....	..	U08 U13
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U01 U07 U11 U12 U14 U17 U23 U28

REVISION

COPIE A: OS:
IND. REV.

UNIT K270

COMPIL. GE 425
EMISS. AUG 1 1968
APPR.
SEZ. SEC. SPS - OGE
LOC. PREGNANA (MI)
N° 400240000
CONT. SU FO. 780 FO. 779

PIASTRA-BOARD UART 2A I 0610073 H

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	..3.	....	....	....	....	....	.2	U05 U30
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	...4	....	....	....	.2..	....	..	U04 U12
....	..3.	....	...4	....	....	....	..	U07 U14 U17 U23 U28
....	....	....	...4	....	....	....	..	U02 U03 U07 U08 U09 U10 U11 U13 U14 U18 U20 U21 U22 U24 U26 U27
....	...4	....	..3.	....	....	....	..	U08 U13
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U01 U08 U10 U11 U12 U14 U17 U22

REVISION

COPIE AI TOT.
REV.

UNIT K270

COMPIL. GE 425

APPR. RL

SEN. SEC. SPS - OGE

LOC. PREGNANA (MI)

N° 400240000

EMISS. AUG 1,1968

CONT. SU FO. 781 FO. 780

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	..3.	....	....	....	....	....	.2	U05 U30
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	....	....	....	....	.2..	....	..	U04 U12
....	..3.	....	...4	....	....	....	..	U07 U14 U16 U23
....	....	....	...4	....	....	....	..	U02 U03 U07 U08 U09 U10 U11 U13 U14 U15 U20 U21 U22 U23 U24 U26 U27
....	....	....	.3..	....	....	....	..	U08 U28 U30 U27
....	...4	....	....	....	....	....	..	U01 U08 U10 U11 U12 U14 U17 U22
....	..3.	....	....	....	....	....	..	

REVISION

COPIE AI CO.
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

EMISS. AUG 1 1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 782 FO. 781

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.2..	....	.2	U26
....	....	....	...4	....	....	....	.2	U18
....	..3.	....	....	....	....	....	.2	U22
....	....	....	....	....	....	....	.2	U05 U06 U09 U15 U17 U22
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	....	....	....	....	.2..	....	..	U03 U04 U12
....	....	....	..34	....	....	....	..	U11
....	....	....	...4	....	....	....	..	U02 U03 U10 U13 U23
....	....	....	..3.	....	....	....	..	U08 U11 U13 U16 U27
....	...4	....	....	....	....	....	..	
....	..3.	....	....	....	....	....	..	U01 U12

REVISION

COPIE A:
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1 1968

CONT. SU FO. 783 FO. 782

PIASTRA-BOARD UART 2A I 0610073 H

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	..3.	....	....	....	.2..	....	.2	U05 U15 U21 U27 U30
....	...1	....	....	....	....	....	1.	U24 U25 U29 U30
....	..3.	....	...4	....	.2..	....	..	U07 U08 U14 U17 U23 U28
....	...1	....	...4	....	.2..	....	..	U07 U14 U18 U21 U22
....	..3.	....	....	....	.2..	....	..	U08 U10 U11 U14
....	...1	....	....	....	.2..	....	..	U02 U03 U04 U12
....	...1	....	...4	....	....	....	..	U02 U03 U08 U10 U11 U14 U16 U20 U26
....	...1	....	..3.	....	....	....	..	U08 U13
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U01 U12

COPIE N. TOT.

REV. REV.

REVISION

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	...4	....	....	....	....	....	.2	U27
....	....	....	....	....	....	....	.2	U05 U15 U30
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	..3.	....	....	....	.2..	....	..	U14
....	....	....	....	....	.2..	....	..	U03 U04 U09 U11 U12 U14 U18 U21
....	...4	....	...4	....	....	....	..	U27
....	..3.	....	...4	....	....	....	..	U10 U11
....	....	....	...4	....	....	....	..	U02 U03 U10 U13 U20 U21 U24 U26 U27
....	....	....	..3.	....	....	....	..	U07 U08 U17 U28
....	..3.	....	....	....	....	....	..	U01 U10 U14 U15 U16 U17 U22 U23

PIASTRA-BOARD VARI 2A I 0610073 H

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...	...4	....	....	...	. ..	. ..	2	U27
....	....	. ..	. .	...	. ..	....	.2	U 5 U06 U30
....	....	....	....	....	....	....	1.	U24 U29 U30
....	..3.	....	...4	....	.2..	....	..	U16 U17 U22
....	....	....	...4	....	.2..	....	..	U16 U21 U26
....	..3.	....	....	....	.2..	....	..	U07 U14 U22
....	....	....	....	....	.2..	....	..	U03 U04 U07 U09 U12 U14 U23
....	...4	....	...4	....	....	....	..	U27 U10 U11
....	..3.	....	...4	....	....	....	..	U02 U03 U10 U13 U15 U20 U21 U24 U27
....	....	....	...4	....	....	....	..	U07 U08 U11 U13 U17 U28 U30
....	..3.	....	....	....	....	....	..	U01 U07 U10 U12 U14 U15 U16

COPIE N° IND. REV.

REVISION

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	...4	....	....	....	....	....	.2	U27
....	....	....	....	....	....	....	.2	U05 U09 U30
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	..3.	....	....	....	.2..	....	..	U12
....	....	....	....	....	.2..	....	..	U04 U12 U21 U26
....	....	....	..34	....	....	....	..	U13
....	...4	....	...4	....	....	....	..	U27
....	....	....	...4	....	....	....	..	U02 U13 U21 U27
....	..3.	....	..3.	....	....	....	..	U11
....	....	....	..3.	....	....	....	..	U08 U13 U16
....	..3	....	....	....	....	....	..	U01 U12 U22

REVISION

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.2..	....	.2	U21 U26
....	....	....	...4	....	....	....	.2	U21 U27
....	....	....	..3.	....	....	....	.2	U16
....	...4	....	....	....	....	....	.2	U27
....	..3.	....	....	....	....	....	.2	U17 U22
....	....	....	....	....	....	....	.2	U05 U06
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	..3.	....	....	....	.2..	....	..	U12
....	....	....	....	....	.2..	....	..	U04 U12
....	....	....	..34	....	....	....	..	U13
....	....	....	...4	....	....	....	..	U02 U13
....	....	....	..3.	....	....	....	..	U08 U11 U13
....	..3.	....	....	....	....	....	..	U01 U12

REVISION

PIASTRA-BOARD VARI 2A 1 0610073 H

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	..3.	....	...4	....	.2..	....	.2	U22 U26
....	....	....	...4	....	.2..	....	.2	U22
....	..3.	....	....	....	.2..	....	.2	U05 U06 U09 U15 U18 U19 U26
....	..3.	....	...4	....	....	....	.2	U16 U22
....	....	....	...4	....	....	....	.2	U16
....	..3.	....	....	....	....	....	.2	U26
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	..3.	....	...4	....	.2..	....	..	U15 U17 U22 U23
....	....	....	...4	....	.2..	....	..	U09 U18 U21 U23 U26
....	..3.	....	....	....	.2..	....	..	U08 U10 U11
....	....	....	....	....	.2..	....	..	U02 U03 U04 U12
....	....	....	..34	....	....	....	..	U07
....	....	....	...4	....	....	....	..	U02 U03 U07 U10 U11 U14 U15 U16 U20 U21 U27
....	....	....	..3.	....	....	....	..	U07 U08 U17 U28
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U01 U12

REVISION

COPIE A.I. TOT. IND. REV.

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1,1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 789 FO. 788

PIASTRA=BOARD UARI 2A I 0610073 H

PROVA=TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
			4				2	U01 U27
	4						2	U27
							2	U05 U15 U26
							1	U24 U25 U29 U30
					2			U03 U04 U07 U08 U14 U17 U18 U22 U28
			34					U13
			4					U02 U13
			3					U06 U13
	3							U01 U12

COPIE A: / TO:

REV. / REV.

REVISION

COMPIL. GE 425	APPR.	UNIT K270	
EMISS. AUG 1 1968		SEZ. SPS - OGE SEC. LOC. PREGNANA (MI)	Nº 400240000

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	..3.	....	...4	....	....	....	.2	U21 U27
....	..34	....	....	....	....	....	.2	U27
....	..3.	....	....	....	....	....	.2	U05 U09 U21 U22 U26 U27
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	....	....	....	....	.2..	....	..	U04 U12
....	....	....	...4	....	....	....	..	U02 U13
....	....	....	..3.	....	....	....	..	U08 U28 U30
....	..3.	....	....	....	....	....	..	U01 U10 U11 U12 U14 U15 U17 U23 U28

REVISION

COPIE A:
IND. RIF.

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	..34	....	...4	....	....	....	.2	U27
....	..3.	....	...4	....	....	....	.2	U05 U18
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	....	....	....	....	.2..	....	..	U21 U26
....	..3.	....	...4	....	....	....	..	U10 U17
....	....	....	...4	....	....	....	..	U02 U03 U07 U08 U10 U11 U13 U20 U21 U22 U24 U26 U27
....	....	....	..3.	....	....	....	..	U08 U28 U30
....	..3.	....	....	....	....	....	..	U01 U10 U12 U14 U15 U17 U22 U23 U28

REVISION

COPIE A:
FO.
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

EMISS. AUG 1,1968

N° 400240000

CONT. SU FO. 792 FO. 791

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 17

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	...4	....	....	....	.2	U21 U27
....	...4	....	....	....	....	....	.2	U27
....	..3.	....	....	....	....	....	.2	U17 U22
....	....	....	....	....	....	....	.2	U05 U17 U19 U21 U26 U28
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	..3.	....	....	....	.2..	....	..	U12
....	....	....	....	....	.2..	....	..	U04 U12
....	....	....	..34	....	....	....	..	U13
....	....	....	...4	....	....	....	..	U02 U13
....	....	....	..3.	....	....	....	..	U08 U13
....	..3.	....	....	....	....	....	..	U01 U12

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 18

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	..3.	....	...4	....	....	....	.2	U05 U19 U30
....	..3.	....	....	....	....	....	.2	U21 U27
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	....	....	...4	....	.2..	....	..	U14 U21 U26
....	..3.	....	....	....	.2..	....	..	U07 U14 U15 U23
....	....	....	....	....	.2..	....	..	U02 U04 U07 U09 U12 U14 U18
....	....	....	..34	....	....	....	..	U08
....	..3.	....	...4	....	....	....	..	U07 U10 U11 U22
....	....	....	...4	....	....	....	..	U02 U03 U08 U10 U16 U20 U24
....	..3.	....	..3.	....	....	....	..	U17 U28
....	....	....	..3.	....	....	....	..	U08 U13 U28
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U01 U17 U22

REVISION

COPIE AG. IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE

SEC.

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1 1968

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 19

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
····	··3·	····	···4	····	·2··	····	·2	U22 U26
····	····	····	···4	····	·2··	····	·2	U22
····	··3·	····	····	····	·2··	····	·2	U05 U06 U09 U15 U18 U19 U26 U30
····	····	····	··34	····	····	····	·2	U17 U28
····	··3·	····	···4	····	····	····	·2	U16 U22
····	··3·	····	····	····	····	····	·2	U26
····	····	····	····	····	····	····	1·	U24 U25 U29 U30
····	··3·	····	···4	····	·2··	····	··	U15 U17 U22 U23
····	····	····	···4	····	·2··	····	··	U09 U18 U21 U23 U26
····	··3·	····	····	····	·2··	····	··	U08 U10 U11
····	····	····	····	····	·2··	····	··	U02 U03 U04 U12
····	····	····	···4	····	····	····	··	U02 U03 U07 U10 U11 U14 U15 U16 U20 U21 U27
····	····	····	··3·	····	····	····	··	U08 U28 U30
····	···4	····	····	····	····	····	··	U27
····	··3·	····	····	····	····	····	··	U01 U12

REVISION

COPIE A: FO. IND. REV.

UNIT K270

COMPIL. GE 425 APPR. SEZ. SPS - OGE

EMISS. AUG 1 1968 SEC. LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 795 FO. 794

PIASTRA-BOARD UARI 2A I 0610073 H

PROVA-TEST = 20

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	...4	....	..2.	....	.2	U21 U26
....	....	....	....	....	....	....	.2	U05 U09 U15 U18 U26 U30
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	..3.	....	...4	....	..2.	....	..	U08
....	....	....	...4	....	..2.	....	..	U03
....	..3.	....	....	....	..2.	....	..	U10 U11
....	....	....	....	....	..2.	....	..	U03 U04 U07 U14 U18 U22
....	....	....	...4	....	....	....	..	U02 U03 U07 U10 U20 U21 U27
....	..3.	....	..3.	....	....	....	..	U17
....	....	....	..3.	....	....	....	..	U08 U17 U28 U30
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U01 U07 U14 U16 U17 U23

PIASTRA-BOARD UART 2A II 0610073 H

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	..3.	....	....	....	.2..	....	.2	U26
....	..3.	....	....	....	....	....	.2	U05 U09 U15 U17 U18 U19 U22 U26 U30
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	....	....	....	....	.2..	....	..	U04 U12
....	....	....	...4	....	....	....	..	U21 U27
....	....	....	..3.	....	....	....	..	U08 U13
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U01 U07 U08 U10 U11 U12 U14 U17 U23 U28

REVISION

PIASTRA-BOARD UARI 2A II 0610073 H

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	Un5 U30
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	....	....	...4	....	.2..	....	..	U21
....	....	....	....	....	.2..	....	..	U03 U04 U12 U21 U26
....	...4	....	...4	....	....	....	..	U27
....	....	....	...4	....	....	....	..	U02 U10 U13 U18 U21 U23
....	..3.	....	..3.	....	....	....	..	U11
....	....	....	..3.	....	....	....	..	U08 U13 U16
....	..3.	....	....	....	....	....	..	U01 U12 U22

REVISION

COPIE A.C. / IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

EMISS. AUG 1 1968

Nº 400240000

CONT. SU FO. 798 FO. 797

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

PIASTRA-BOARD UARI 2A II 0610073 H

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	....	....	...4	....	..2.	....	..	U11
....	..3.	....	....	....	..2.	....	..	U12
....	....	....	....	....	..2.	....	..	U04 U12 U26
....	...4	....	...4	....	....	....	..	U27
....	....	....	...4	....	....	....	..	U02 U13 U18 U23
....	....	....	..3.	....	....	....	..	U08 U13 U16 U17 U28
....	..3.	....	....	....	....	....	..	U01 U12 U17 U22

REVISION

COPIE A: IND. REC.

COMPIL. GE 425	APPR.	UNIT K270			
EMISS. AUG 1 1968		SEZ. SEC. SPS - OGE		Nº 400240000	
		LOC. PREGNANA (MI)		CONT. SU FO. 799 FO. 798	

PIASTRA-BOARD UARI 2A II 0610073 H

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U05 U06 U15 U18 U21 U26 U30
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	....	....	....	....	.2..	....	..	U04 U07 U14 U15 U16 U18 U23
....	....	....	...4	....	....	....	..	U02 U13
....	....	....	..3.	....	....	....	..	U08 U28 U30
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U17 U22

PIASTRA-BOARD UARI 2A II 0610073 H

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U05 U15 U18 U19 U21 U26 U30
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	....	....	....	....	.2..	....	..	U04 U07 U14 U15 U18 U23
....	....	....	..34	....	....	....	..	U13
....	....	....	...4	....	....	....	..	U02 U13
....	....	....	..3.	....	....	....	..	U08 U13
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U17 U22

PIASTRA-BOARD UARI 2A II 0610073 H

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	.3.	....	...4	....	.2..	....	..	U10
....	....	....	...4	....	.2..	....	..	U21
....	.3.	....	.3.	....	.2..	....	..	U17 U28
....	....	....	....	....	.2..	....	..	U02 U03 U04 U09 U11 U12 U14 U16 U16 U21 U22 U23
....	.3.	....	...4	....	....	....	..	U08
....	....	....	...4	....	....	....	..	U02 U03 U08 U10 U20 U21 U26 U27
....	....	....	.3.	....	....	....	..	U08 U28 U30
....	...4	....	....	....	....	....	..	U27
....	.3.	....	....	....	....	....	..	U01 U14 U15 U17 U22 U23

REVISION

CODIF. AI CLI IND. REV.

PIASTRA-BOARD UARI 2A II 0610073 H

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	...4	....	....	....	.2	U05 U06 U21 U27 U30
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	....	....	....	....	.2..	....	..	U04 U12
....	..3.	....	...4	....	....	....	..	U22
....	....	....	...4	....	....	....	..	U02 U03 U07 U08 U10 U11 U13 U14 U15 U16 U20 U21 U24 U26
....	....	....	..3.	....	....	....	..	U08 U28 U30
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U17 U22

REVISION

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY
GE 130

1ª APPLIC.

816 803
CONT. SU FO. FO.

PIASTRA-BOARD VARI 2A II 0610073 H

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	...4	....	.2..	....	.2	U05 U30
....	....	....	....	....	....	....	1.	U24 U25 U29 U30
....	....	....	...4	....	.2..	....	..	U09 U10 U11 U14 U16 U18 U22 U23
....	....	....	....	....	.2..	....	..	U02 U04 U14 U15 U17 U22 U23
....	....	....	...4	....	....	....	..	U02 U07 U08 U10 U11 U14 U16 U20 U21 U24 U26
....	....	....	..3.	....	....	....	..	U08 U28 U30
....	...4	....	....	....	....	....	..	U27
....	..3.	....	....	....	....	....	..	U01 U12

COPIE AG. / IND. REV.

REVISION

UNIT K270

COMPIL. GE 425

EMISS. AUG 1,1968

APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 816 FO. 803

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BUARD UARD 2A 0610074 W

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	12.4	12	U20 U25
....	....	....	....	....	....	....	12	U17
....	....	....	....	....	....	....	.2	U13 U17 U21
....	....	....	....	....	....	....	1.	U16 U17 U21
....	....	....	....	....	....	.2.4	..	U11
....	....	....	....	....	....	...4	..	U11 U12 U22
....	....	....	....	....	....	..3.	..	U20 U25
....	....	....	....	....	....	.2..	..	U09 U11 U22
....	....	....	....	....	....	1...	..	U14 U19 U23
....	....	....	....	....	...4	....	..	U14 U18 U20 U23
....	....	....	....	....	.23.	....	..	U05
....	....	....	....	....	..3.	....	..	U03 U05 U24
....	....	....	....	....	.2..	....	..	U05 U10 U24

PIASTRA=BOARD UARO 2A 0610074 W

PROVA=TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	12.4	12	U25
....	....	....	....	....	.2..	1234	.2	U25
....	....	....	....	....	.2..	12.4	.2	U19
....	....	....	....	....	.2..	.2..	.2	U13
....	....	....	....	....	....	....	.2	U13 U17 U21
....	....	....	....	....	..34	....	1.	U20
....	....	....	....	....	...4	....	1.	U20
....	....	....	....	....	....	....	1.	U16 U17 U21
....	....	....	....	....	...-	.2.4	..	U22
....	....	....	....	....	...-	...4	..	U11 U12 U22
....	....	....	....	....	....	..3.	..	U20 U25
....	....	....	....	....	.2..	.2..	..	U13
....	....	....	....	....	....	.2..	..	U09 U11 U15 U22
....	....	....	....	....	....	1...	..	U14 U19 U23
....	....	....	....	....	...4	....	..	U14 U18 U23
....	....	....	....	....	..3.	....	..	U03 U05 U24
....	....	....	....	....	.2..	....	..	U05 U07 U10 U24

REVISION

COPIE AL FO.
REV. RE

PIASTRA-BOARD UARD 2A 0610074 W

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	12	U17
....	....	....	....	....	..3.	1..4	.2	U13 U15 U25
....	....	....	....	....	....	....	.2	U13 U17 U21
....	....	....	....	....	....	...4	1.	U21
....	....	....	....	....	.2.4	.2..	1.	U20 U25
....	....	....	....	....	...4	....	1.	U20
....	....	....	....	....	....	....	1.	U17
....	....	....	....	....	....	...4	..	U12 U22
....	....	....	....	....	.2..	.23.	..	U20
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U09 U11 U15 U16 U22
....	....	....	....	....	...4	1...	..	U14
....	....	....	....	....	....	1...	..	U14 U19 U23
....	....	....	....	....	..34	....	..	U23
....	....	....	....	....	...4	....	..	U14
....	....	....	....	....	..3.	....	..	U03 U24
....	....	....	....	....	.2..	....	..	U05 U07 U10 U18 U24

REVISION

COPIE AI FO.
IND. REV.

UNIT K270

COMPIL. GE 425
APPR.
EMISS. AUG 1,1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 819 FO. 818

PIASTRA-BOARD UARO 2A 0610074 W

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	•2••	1••4	•2	U19
••••	••••	••••	••••	••••	••••	••••	•2	U13 U17 U21
••••	••••	••••	••••	••••	••••	•2•4	1•	U21
••••	••••	••••	••••	••••	••34	•2••	1•	U25
••••	••••	••••	••••	••••	•••4	••••	1•	U20 U25
••••	••••	••••	••••	••••	••••	••••	1•	U17 U20
••••	••••	••••	••••	••••	••••	•2•4	••	U22
••••	••••	••••	••••	••••	••••	•••4	••	U11 U12 U16 U22
••••	••••	••••	••••	••••	•••4	••3•	••	U20
••••	••••	••••	••••	••••	••••	••3•	••	U20
••••	••••	••••	••••	••••	••3•	•2••	••	U13 U15 U25
••••	••••	••••	••••	••••	••••	•2••	••	U09 U15 U16 U22
••••	••••	••••	••••	••••	•234	1•••	••	U23
••••	••••	••••	••••	••••	••••	1•••	••	U14 U19 U23
••••	••••	••••	••••	••••	•234	••••	••	U23
••••	••••	••••	••••	••••	•••4	••••	••	U14
••••	••••	••••	••••	••••	•23•	••••	••	U24
••••	••••	••••	••••	••••	••3•	••••	••	U03 U18 U24
••••	••••	••••	••••	••••	•2••	••••	••	U05 U07 U10 U24

REVISION

COPIA AD
IND. REV.

PIASTRA-BOARD UARO 2A 0610074 W

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.23.	1...	.2	U13 U15 U25
....	....	....	....	....	...4	....	.2	U13 U17 U21
....	....	....	....	....	...4	.234	1.	U20
....	....	....	....	....	..34	.2.4	1.	U25
....	....	....	....	....	...4	.2.4	1.	U20 U25
....	....	....	....	....	....	...4	1.	U21
....	....	....	....	....	....	....	1.	U17
....	....	....	....	....	....	.2.4	..	U16 U22
....	....	....	....	....	....	...4	..	U11 U12
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U09 U11 U15 U16 U22
....	....	....	....	....	....	1...	..	U14 U19 U23
....	....	....	....	....	.234	....	..	U23
....	....	....	....	....	...4	....	..	U14
....	....	....	....	....	.23.	....	..	U18 U24
....	....	....	....	....	..3.	....	..	U03
....	....	....	....	....	.2..	....	..	U10 U24

REVISION

COPIE N.
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ.
SEC. SPS - OGE
LOC. PREGNANA (MI)

EMISS. AUG 1 1968

Nº 400240000

CONT. SU FO. 821 FO. 820

PIASTRA-BOARD UARO 2A 0610074 W

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	12	U21
....	....	....	....	....	..3.	1..4	.2	U19
....	....	....	....	....	..3.	...4	.2	U13
....	....	....	....	....	....	....	.2	U13 U17 U21
....	....	....	....	....	2.4	.2..	1.	U20 U25
....	....	....	....	....	....	....	1.	U16 U17 U21
....	....	....	....	....	..3.	...4	..	U13 U15
....	....	....	....	....	....	...4	..	U11 U12 U22
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U09 U11 U22
....	....	....	....	....	...4	1...	..	U23
....	....	....	....	....	....	1...	..	U14 U19 U23
....	....	....	....	....	...4	....	..	U14 U18 U23
....	....	....	....	....	..3.	....	..	U03 U05 U24
....	....	....	....	....	2..	....	..	U05 U10 U24

PIASTRA-BOARD UARO 2A 0610074 W

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	12.4	12	U25
....	....	....	....	....	....	123.	12	U20
....	....	....	....	....	...4	12..	12	U20 U25
....	....	....	....	....	....	12..	.2	U13
....	....	....	....	....	....	.2..	.2	U16
....	....	....	....	....	....	....	.2	U13 U16 U17 U21
....	....	....	....	....	....	....	1.	U17 U21
....	....	....	....	....	.23.	...4	..	U19
....	....	....	....	....	....	...4	..	U11 U12 U16 U22
....	....	....	....	....	....	..3.	..	U20 U25
....	....	....	....	....	....	.2..	..	U09 U11 U16 U22
....	....	....	....	....	....	1...	..	U14 U18 U19 U23
....	....	....	....	....	...4	....	..	U14 U20 U23
....	....	....	....	....	.23.	....	..	U05 U24
....	....	....	....	....	..3.	....	..	U03 U05 U18 U24
....	....	....	....	....	.2..	....	..	U05 U10 U18 U24

PIASTRA-BOARD UARO 2A 0610074 W

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	1..4	.2	U13 U15 U25
....	....	....	....	....	....	....	.2	U13 U17 U21
....	....	....	....	....	....	.2.4	1.	U21
....	....	....	....	....	.234	...4	1.	U25
....	....	....	....	....	.234	..3.	1.	U20
....	....	....	....	....	.234	....	1.	U20 U25
....	....	....	....	....	....	....	1.	U17
....	....	....	....	....	....	.2.4	..	U22
....	....	....	....	....	....	...4	..	U12 U16 U22
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U09 U11 U15 U19 U22
....	....	....	....	....	....	1...	..	U14 U19 U23
....	....	....	....	....	..34	....	..	U23
....	....	....	....	....	...4	....	..	U14
....	....	....	....	....	.23.	....	..	U18 U24
....	....	....	....	....	..3.	....	..	U03 U05
....	....	....	....	....	.2..	....	..	U05 U07 U10 U18 U24

REVISION

PIASTRA-BOARD UARU 2A 0610074 H

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	12..	.2	U13 U15 U25
....	....	....	....	....	....	....	.2	U13 U17 U21
....	....	....	....	....	.2..	..34	1.	U20
....	....	....	....	....	.2.4	.2.4	1.	U25
....	....	....	....	....	.2.4	...4	1.	U20 U25
....	....	....	....	....	....	...4	1.	U21
....	....	....	....	....	....	....	1.	U17
....	....	....	....	....	....	.2.4	..	U22
....	....	....	....	....	....	...4	..	U11 U12 U16
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U09 U15 U16 U22
....	....	....	....	....	...4	1...	..	U14
....	....	....	....	....	....	1...	..	U14 U19 U23
....	....	....	....	....	.234	....	..	U23
....	....	....	....	....	...4	....	..	U14 U20
....	....	....	....	....	.23.	....	..	U18
....	....	....	....	....	.3.	....	..	U03 U05 U19 U24
....	....	....	....	....	.2..	....	..	U05 U07 U10 U18 U24

REVISION

PIASTRA-BUARD UARD 2A U610074 W

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
•••	•••	•••	•••	•••	.2.4	1..4	12	U20
•••	•••	•••	•••	•••	•••	•••	12	U17
•••	•••	•••	•••	•••	•••	•••	.2	U13 U17 U21
•••	•••	•••	•••	•••	.2.4	.2.4	1.	U25
•••	•••	•••	•••	•••	•••	•••	1.	U16 U17 U21
•••	•••	•••	•••	•••	•••	...4	..	U11 U12 U22
•••	•••	•••	•••	•••	...4	..3.	..	U20
•••	•••	•••	•••	•••	•••	..3.	..	U20 U25
•••	•••	•••	•••	•••	..3.	.2..	..	U19
•••	•••	•••	•••	•••	•••	.2..	..	U09 U11 U13 U15 U22 U25
•••	•••	•••	•••	•••	•••	1...	..	U14 U19 U23
•••	•••	•••	•••	•••	...4	•••	..	U14 U18 U20 U23
•••	•••	•••	•••	•••	..3.	•••	..	U03 U05 U24
•••	•••	•••	•••	•••	.2..	•••	..	U05 U10 U24

PIASTRA-BOARD UARD 2A 0610074 H

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...•	....	....	....	....	.234	12.4	12	U25
...•	....	....	....	....	.2.4	1.3.	12	U20
...•	....	....	....	....	.2.4	1...	12	U20 U25
...•	....	....	....	....	.2..	1...	.2	U13
...•	....	....	....	....	....	....	.2	U13 U16 U17 U21
...•	....	....	....	....	....	....	1.	U17 U21
...•	....	....	....	....	..3.	.2.4	..	U19
...•	....	....	....	....	....	.2.4	..	U11 U22
...•	....	....	....	....	....	...4	..	U11 U12 U16 U22
...•	....	....	....	....	....	..3.	..	U20 U25
...•	....	....	....	....	....	.2..	..	U09 U11 U16 U22
...•	....	....	....	....	.2..	1...	..	U18
...•	....	....	....	....	....	1...	..	U14 U18 U19 U23
...•	....	....	....	....	...4	....	..	U14 U23
...•	....	....	....	....	..3.	....	..	U03 U05 U18 U24
...•	....	....	....	....	.2..	....	..	U05 U10 U18 U24

PIASTRA=BUARD UARU ZA 0610074 H

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...	....	....	....	....	....	.2.4	12	U21
...	....	....	....	....	.3.	.2..	.2	U19
...	....	....	....	....	....	....	.2	U13 U17 U21
...	....	....	....	....	....	.2.4	1.	U21
...	....	....	....	....	.2.4	...4	1.	U25
...	....	....	....	....	....	.3.	1.	U20
...	....	....	....	....	...4	....	1.	U20 U25
...	....	....	....	....	....	....	1.	U17
...	....	....	....	....	....	.2.4	..	U22
...	....	....	....	....	.2..	1..4	..	U13 U15 U25
...	....	....	....	....	....	...4	..	U12 U16 U22
...	....	....	....	....	....	.3.	..	U20
...	....	....	....	....	....	.2..	..	U09 U11 U15 U22
...	....	....	....	....	...4	1...	..	U14
...	....	....	....	....	....	1...	..	U14 U19 U23
...	....	....	....	....	.234	....	..	U23
...	....	....	....	....	...4	....	..	U14 U20
...	....	....	....	....	.23.	....	..	U24
...	....	....	....	....	.3.	....	..	U03 U05 U18 U24
...	....	....	....	....	.2..	....	..	U07 U10 U18 U24

PIASTRA-BOARD UARU 2A 0610074 W

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.2..	.2.4	.2	U13 U15 U25
....	....	....	....	....	....	....	.2	U13 U17 U21
....	....	....	....	....	....	.2.4	1.	U21
....	....	....	....	....	.234	...4	1.	U25
....	....	....	....	....	..34	..3.	1.	U20
....	....	....	....	....	..34	....	1.	U20 U25
....	....	....	....	....	....	....	1.	U17
....	....	....	....	....	....	.2.4	..	U16 U22
....	....	....	....	....	....	...4	..	U12
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U09 U22
....	....	....	....	....	..34	1...	..	U23
....	....	....	....	....	....	1...	..	U14 U19 U23
....	....	....	....	....	..34	....	..	U23
....	....	....	....	....	...4	....	..	U14
....	....	....	....	....	.23.	....	..	U24
....	....	....	....	....	..3.	....	..	U03 U05 U18
....	....	....	....	....	.2..	....	..	U07 U10 U18 U24

REVISION

COPIE A:
IND. TO:
REV

PIASTRA-BUARD UARD 2A 0610074 W

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.234	12.4	12	U25
....	....	....	....	....	....	12..	.2	U19
....	....	....	....	....	....	....	.2	U13 U16 U21
....	....	....	....	....	.234	...4	1.	U20 U25
....	....	....	....	....	...4	....	1.	U20
....	....	....	....	....	....	....	1.	U17 U21
....	....	....	....	....	.23.	..34	..	U20
....	....	....	....	....	..3.	...4	..	U13 U15 U25
....	....	....	....	....	....	...4	..	U11 U12 U16 U22
....	....	....	....	....	....	..3.	..	U20 U25
....	....	....	....	....	....	.2..	..	U09 U11 U16 U22
....	....	....	....	....	....	1...	..	U18 U19 U23
....	....	....	....	....	...4	....	..	U14 U23
....	....	....	....	....	.23.	....	..	U18
....	....	....	....	....	..3.	....	..	U03 U05 U18 U24
....	....	....	....	....	.2..	....	..	U05 U10 U18 U24

COPIE AL. N. REV.

REVISION

PIASTRA-GUARD GUARD ZA 0610074 M

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	1..4	.2	U19
....	....	....	....	....	....	....	.2	U13 U17 U21
....	....	....	....	....	....	.2.4	1.	U21
....	....	....	....	....	.2.4	.2..	1.	U25
....	....	....	....	....	...4	.2..	1.	U20 U25
....	....	....	....	....	...4	....	1.	U20
....	....	....	....	....	....	....	1.	U17
....	....	....	....	....	....	.2.4	..	U16
....	....	....	....	....	....	...4	..	U11 U12 U22
....	....	....	....	....	....	.23.	..	U20
....	....	....	....	....	....	..3.	..	U20
....	....	....	....	....	....	.2..	..	U09 U11 U15 U16 U22
....	....	....	....	....	....	1....	..	U14 U19 U23
....	....	....	....	....	..34	....	..	U23
....	....	....	....	....	...4	....	..	U14
....	....	....	....	....	.23.	....	..	U13 U15 U25
....	....	....	....	....	..3.	....	..	U03 U24
....	....	....	....	....	.2..	....	..	U07 U18 U24

REVISION

COPIE A FO. INDI. REV.

QUESTA PAGINA E' STATA LASCIATA IN BIANCO PER RAGIONI DI IMPAGINAZIONE.

THIS PAGE IS INTENTIONALLY LEFT BLANK.

PIASTRA-BOARD VARI 2A 0610075 S

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U02
....	....	....	....	....	....	...4	1.	U01 U03 U04
....	....	....	....	....	....	....	1.	U04
....	....	....	....	....	....	...4	..	U04
....	....	....	....	....	...4	....	..	U06 U08
....	....	....	....	....	.2..	....	..	U05
....	....	....	....	.3..	....	....	..	U07
....	....	....	....	1...	....	....	..	U07

REVISION

COPIE A:
TO:
IND.
INV.

PIASTRA-BOARD VARI 2A 0610075 $

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U02
....	....	....	....	....	....	...4	1.	U01 U04
....	....	....	....	....	....	..04	..	U04
....	....	....	....	....	...4	....	..	U06 U08
....	....	....	....	....	.2..	....	..	U05
....	....	....	....	.3..	....	....	..	U07
....	....	....	....	1...	....	....	..	U07

REVISION

COPIE A: CO. IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE

SEC.

LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1,1968

PIASTRA-BOARD VARI 2A 0610075 S

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U02
....	....	....	....	....	....	...4	1.	U01 U04
....	....	....	....	....	....	...4	..	U04
....	....	....	....	....	.2.4	....	..	U06
....	....	....	....	....	...4	....	..	U06 U08
....	....	....	....	....	.2..	....	..	U05 U06
....	....	....	....	.3..	....	....	..	U07
....	....	....	....	1...	....	....	..	U07

REVISIONI

COPIE A:
TO:
IND.
INV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 4002A000J

EMISS. AUG 1, 1968

CONT. SU FO. 839 FO. 838

PIASTRA-BOARD VARI 2A 0610075 S

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U02
....	....	....	....	....	....	...4	1.	U01 U04
....	....	....	....	....	....	...4	..	U04
....	....	....	....	....	...4	....	..	U06 U08
....	....	....	....	....	.2..	....	..	U05 U06
....	....	....	....	.3..	....	....	..	U07
....	....	....	....	1...	....	....	..	U07

REVISION

COPIE A: TOT. IND. REV.

UNIT K270

COMPIL. GE 425 APPR. SEZ. SEC. SPS - OGE

EMISS. AUG 1, 1968 LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 840 FO. 839

PIASTRA-BOARD VARI 2A 0610075 S

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U02
....	....	....	....	....	....	...4	1.	U01 U04
....	....	....	....	....	....	...4	..	U04
....	....	....	....	....	...4	....	..	U06 U08
....	....	....	....	....	.2..	....	..	U05 U06
....	....	....	....	..3.	....	....	..	U07
....	....	....	....	1...	....	....	..	U07

REVISION

COPIE A:
TO:
IND. REV.

PIASTRA-BOARD VARI 2A 0610075 S

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U02
....	....	....	....	....	....	...4	1.	U03 U04
....	....	....	....	....	....	...4	..	U04
....	....	....	....	....	...4	....	..	U06 U08
....	....	....	....	....	.2..	....	..	U05 U06
....	....	....	....	.3..	....	....	..	U07
....	....	....	....	1...	....	....	..	U07

REVISION

PIASTRA-BOARD VARI 2A 0610075 S

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U02
....	....	....	....	....	....	...4	1.	U03 U04
....	....	....	....	....	....	..4.	..	U04
....	....	....	....	....	...4	....	..	U06 U08
....	....	....	....	....	.2..	....	..	U05 U06
....	....	....	....	.3..	....	....	..	U07
....	....	....	....	1...	....	....	..	U07

REVISION

COPIE A: FO. IND. REV.

UNIT K270

COMPIL. GE 425 APPR.

EMISS. AUG 1,1968

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 843 FO. 842

PIASTRA-BUARD VARI ZA 0610075 S

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..,.	.2	U02
....	....	....	....	....	....	..,4	1.	U03 U04
....	....	....	....	....	....	..,4	..	U04
....	....	....	....	....	...4	....	..	U06 U08
..,.	....	....	....	....,	.2..	..,.	..	U05
....,	....	....	....	..3.	....	....	..	U07
....	....	....	....	1...	....	....	..	U07

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

1ª APPLIC. GE 130

CONT. SU FO. 851 FO. 844

PIASTRA-BOARD VARI 2A 0610075 S

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U02
....	....	....	....	....	....	...4	1.	U03 U04
....	....	....	....	....	....	...4	..	U04
....	....	....	....	....	...4	....	..	U06 U08
....	....	....	....	....	.2..	....	..	U05
....	....	....	....	..3.	....	....	..	U07
....	....	....	....	1...	....	....	..	U07

REVISION

COPIE A TO
IND. REV.

CONTROL GE 425

EMISS. AUG 1,1968

APPR.

UNIT K270

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

CONT. SU FO. 851 FO. 844

PIASTRA-BOARD VARI 2B 0610055 Y

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U30
....	....	....	....	....	....	....	1.	U29 U30
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	....	1...	....	..	U29
....	....	....	...4	....	....	....	..	U24
....	....	....	..3.	....	....	....	..	U24
....	....	.2..	....	....	....	....	..	V04
....	....	1...	....	....	....	....	..	V03
....	...4	....	....	....	....	....	..	V02
....	.2..	....	....	....	....	....	..	V01

REVISION

COPIE A:
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1 1968

CONT. SU FO. 852 FO. 851

PIASTRA-BOARD VARI 2B 0610055 Y

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	.2	U30
....	....	....	....	....	....	....	1.	U29 U30
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	....	1...	....	..	U29
....	....	....	...4	....	....	....	..	U24
....	....	....	..3.	....	....	....	..	U24
....	....	.2..	....	....	....	....	..	U21 V04
....	....	1...	....	....	....	....	..	U21 V03
....	...4	....	....	....	....	....	..	U26 V02
....	.2..	....	....	....	....	....	..	U26 V01

PIASTRA-BOARD VARI 2B 0610055 Y

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.2..	.2	U30
....	....	....	....	....	....	....	.2	U30
....	....	....	....	....	1...	....	1.	U29
....	....	....	....	....	....	....	1.	U29 U30
....	....	....	....	....	....	.2..	..	U30
....	....	....	....	....	1...	....	..	U29
....	....	....	..34	....	....	....	..	U24
....	....	....	...4	....	....	....	..	U24
....	....	....	..3.	....	....	....	..	U24
....	....	12..	....	....	....	....	..	U21
....	....	.2..	....	....	....	....	..	U21 V04
....	....	1...	....	....	....	....	..	U21 V03
....	.2.4	....	....	....	....	....	..	U26
....	...4	....	....	....	....	....	..	U26 V02
....	.2..	....	....	....	....	....	..	U26 V01

PIASTRA-BOARD VARI 28 0610055 Y

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U29 U30
....	....	....	....	....	1...	....	..	U29
....	....	....	...4	....	....	....	..	U24
....	....	.2..	....	....	....	....	..	V04
....	....	1...	....	....	....	....	..	V03
....	...4	....	....	....	....	....	..	V02
....	.2..	....	....	....	....	....	..	V01

REVISION

COPIE A: TO:
IND. REV.

UNIT K270

COMPIL. GE .425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1 1968

CONT. SU FO. 855 FO. 854

PIASTRA-BOARD VARI 28 0610055 Y

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U29 U30
....	....	....	....	....	1...	....	..	U29
....	....	....	...4	....	....	....	..	U24
....	....	.2..	....	....	....	....	..	U21 V04
....	....	1...	....	....	....	....	..	U21 V03
....	...4	....	....	....	....	....	..	U26 V02
....	.2..	....	....	....	....	....	..	U26 V01

PIASTRA-BUARD VARI 2H 0610055 1

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	....	1.	U29 U30
....	....	....	....	....	1...	....	..	U29
....	....	....	...4	....	....	....	..	U24
....	....	.2..	....	....	....	....	..	V04
....	....	1...	....	....	....	....	..	V03
....	...4	....	....	....	....	....	..	V02
....	.2..	....	....	....	....	....	..	V01

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 1

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.23.	.2	U24
....	....	....	....	....	....	..3.	.2	U24
....	....	....	....	....	....	.2..	.2	U24
....	....	....	....	....	....	....	.2	U20 U25
....	....	....	....	....	....	...4	..	U22 U23
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	..3.	....	..	U15
....	....	....	....	....	.2..	....	..	U17 U18
....	....	....	....	....	1...	....	..	U12 U17
....	....	....	....	....	XXX.	.XXX	XX	U24

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 2

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.2..	.2	U24
....	....	....	....	....	....	....	.2	U20 U24 U25
....	....	....	....	....	.2..	....	1.	U18
....	....	....	....	....	....	...4	..	U22 U23
....	....	....	....	....	....	.23.	..	U24
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	..3.	....	..	U15
....	....	....	....	....	.2..	....	..	U17 U18 U21
....	....	....	....	....	1...	....	..	U12 U17
....	....	....	....	....	XXX.	.XXX	XX	U24

REVISION

PIASTRA-BOARD VIAL 2A u610076 E

PROVA-TEST = 3

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1...	.234	.2	U24
....	....	....	....	....	....	....	.2	U20 U25
....	....	....	....	....	.2..	....	1.	U18
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	...4	..	U22 U23
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	..3.	....	..	U15
....	....	....	....	....	.2..	....	..	U13 U17 U18 U21
....	....	....	....	....	1...	....	..	U12 U17
....	....	....	....	....	XXX.	.XXX	XX	U24

REVISION

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 4

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	1...	.234	.2	U24
....	....	....	....	....	....	....	.2	U20 U25
....	....	....	....	....	.2..	....	1.	U18
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	...4	..	U22 U23
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	.3..	....	..	U15
....	....	....	....	....	.2..	....	..	U13 U17 U18 U21
....	....	....	....	....	1...	....	..	U12 U17
....	....	....	....	....	XXX.	.XXX	XX	U24

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 5

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.2..	.2..	12	U24
....	....	....	....	....	....	....	.2	U20 U24 U25
....	....	....	....	....	....	...4	1.	U23
....	....	....	....	....	.23.	....	1.	U15
....	....	....	....	....	.2..	....	1.	U13 U15 U18
....	....	....	....	....	1...	....	1.	U12
....	....	....	....	....	....	....	1.	U12 U14 U23
....	....	....	....	....	....	..34	..	U24
....	....	....	....	....	....	...4	..	U22 U23
....	....	....	....	....	....	.23.	..	U24
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	..3.	....	..	U15
....	....	....	....	....	.2..	....	..	U18
....	....	....	....	....	1...	....	..	U12 U17
....	....	....	....	....	XXX.	.XXX	XX	U24

REVISION

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

I^a APPLIC. GE 130

CONT. SU FO. 867 FO. 866

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 6

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.2..	.234	.2	U24
....	....	....	....	....	....	....	.2	U20 U25
....	....	....	....	....	....	....	1.	U12 U14 U18 U19 U23
....	....	....	....	....	....	..34	..	U24
....	....	....	....	....	....	.2.4	..	U24
....	....	....	....	....	....	...4	..	U22 U23
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	.23.	....	..	U15
....	....	....	....	....	..3.	....	..	U15
....	....	....	....	....	.2..	....	..	U13 U15 U17 U18 U20 U21 U22
....	....	....	....	....	1...	....	..	U12 U17

REVISION

COPIE AS FO. IND. REV.

UNIT K270

COMPIL. GE 425 APPR.

SEZ. SEC. SPS - OGE

LOC. PREGNANA (MI)

EMISS. AUG 1,1968

N° 4002400BE

CONT. SU FO. 867 FO. 866

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 7

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
.••.	....	....	....	....	....	.234	.2	U24
.••.	....	....	....	....	....	..3.	.2	U24
.••.	....	....	....	....	....	.2..	.2	U24
.••.	....	....	....	....	....	....	.2	U20 U25
.••.	....	....	....	....	.2..	...4	..	U22
.••.	....	....	....	....	....	...4	..	U22 U23
.••.	....	....	....	....	....	..3.	..	U24
.••.	....	....	....	....	....	.2..	..	U24
.••.	....	....	....	....	.23.	....	..	U15
.••.	....	....	....	....	..3.	....	..	U15
.••.	....	....	....	....	.2..	....	..	U13 U15 U17 U18 U20 U21 U22 U24
.••.	....	....	....	....	1...	....	..	U12 U17

REVISION

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 8

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
...	...	...	...	...	...	...4	12	U24
...	...	...	...	...	...	.2..	12	U24
...	...	...	...	...	...	...	2	U20 U24 U25
...	...	...	...	...	.2..	...4	1.	U22
...	...	...	...	...	.2..	.23.	1.	U24
...	...	...	...	...	...	.3..	1.	U24
...	...	...	...	...	.2..	...	1.	U13 U15 U17 U18 U20 U21 U22
...	...	...	...	...	1...	...	1.	U12
...	...	...	...	...	...	...	1.	U12 U14 U18 U19
...	...	...	...	...	...	...4	..	U22 U23
...	...	...	...	...	...	.3..	..	U24
...	...	...	...	...	...	.2..	..	U24
...	...	...	...	...	.3.	...	..	U15
...	...	...	...	...	.2.	...	..	U18 U20
...	...	...	...	...	1...	...	..	U12 U17

CONFIG. PO. REV.

REVISION

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 9

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
••••	••••	••••	••••	••••	1•••	•2••	12	U24
••••	••••	••••	••••	••••	1•••	•23•	•2	U24
••••	••••	••••	••••	••••	••••	••3•	•2	U24
••••	••••	••••	••••	••••	••••	••••	•2	U20 U25
••••	••••	••••	••••	••••	•2••	•••4	1•	U22
••••	••••	••••	••••	••••	••••	••••	1•	U12
••••	••••	••••	••••	••••	•2••	•••4	••	U22
••••	••••	••••	••••	••••	••••	•••4	••	U22 U23
••••	••••	••••	••••	••••	••••	••3•	••	U24
••••	••••	••••	••••	••••	••••	•2••	••	U24
••••	••••	••••	••••	••••	••3•	••••	••	U15
••••	••••	••••	••••	••••	•2••	••••	••	U13 U15 U17 U18 U20 U21 U22 U24
••••	••••	••••	••••	••••	1•••	••••	••	U12 U17

REVISION

COPIE A.C. / IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

EMISS. AUG 1,1968

Nº 4002A0000

CONT. SU FO. 870 FO. 869

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 10

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.23.	12	U24
....	....	....	....	....	....	.23.	.2	U24
....	....	....	....	....	....	..3.	.2	U24
....	....	....	....	....	....	....	.2	U20 U25
....	....	....	....	....	.2..	...4	1.	U22
....	....	....	....	....	....	.23.	1.	U24
....	....	....	....	....	....	....	1.	U12
....	....	....	....	....	.2..	...4	..	U22
....	....	....	....	....	....	...4	..	U22 U23
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	..3.	....	..	U15
....	....	....	....	....	.2..	....	..	U13 U15 U17 U18 U20 U21 U22 U24
....	....	....	....	....	1...	....	..	U12 U17
....	....	....	....	....	XXX.	.XXX	XX	U24

REVISION

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 11

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	12	U24
....	....	....	....	....	....	.23.	12	U24
....	....	....	....	....	....	....	.2	U20 U24 U25
....	....	....	....	....	....	...4	1.	U22
....	....	....	....	....	.2..	.2..	1.	U24
....	....	....	....	....	.2..	....	1.	U13 U15 U17 U18 U20 U21 U22
....	....	....	....	....	1...	....	1.	U12
....	....	....	....	....	....	....	1.	U12 U14 U18 U19 U24
....	....	....	....	....	....	...4	..	U22 U23
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	.3..	....	..	U15
....	....	....	....	....	.2..	....	..	U18 U20
....	....	....	....	....	1...	....	..	U12 U17
....	....	....	....	....	XXX.	.XXX	XX	U24

REVISION

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 12

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	.2	U24
....	....	....	....	....	....	.23.	.2	U24
....	....	....	....	....	....	....	.2	U20 U24 U25
....	....	....	....	....	....	....	1.	U12 U14 U18 U19 U23
....	....	....	....	....	.2..	...4	..	U22
....	....	....	....	....	....	...4	..	U22 U23
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	12..	.2..	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	..3.	....	..	U15
....	....	....	....	....	.2..	....	..	U13 U15 U17 U18 U20 U21 U22
....	....	....	....	....	1...	....	..	U12 U17
....	....	....	....	....	XXX.	.XXX	XX	U24

REVISION

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 13

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	..34	.2	U24
....	....	....	....	....	....	.23.	.2	U24
....	....	....	....	....	....	....	.2	U20 U24 U25
....	....	....	....	....	.2..	....	1.	U17 U18 U20 U21 U22
....	....	....	....	....	....	....	1.	U12 U13 U18
....	....	....	....	....	....	...4	..	U22 U23
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	..3.	....	..	U15
....	....	....	....	....	.2..	....	..	U18
....	....	....	....	....	1...	....	..	U12 U17
....	....	....	....	....	XXX.	.XXX	XX	U24

REVISION

COPIE AI TOL. INV. REV.

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 14

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	.234	.2	U24
....	....	....	....	....	....	..3.	.2	U24
....	....	....	....	....	....	.2..	.2	U24
....	....	....	....	....	....	....	.2	U20 U25
....	....	....	....	....	....	...4	..	U22 U23
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	.3.	....	..	U15
....	....	....	....	....	12..	....	..	U17
....	....	....	....	....	.2..	....	..	U13 U17 U18 U20 U21 U22
....	....	....	....	....	1...	....	..	U12 U17
....	....	....	....	....	XXX.	.XXX	XX	U24

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

I^a APPLIC. GE 130

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 15

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI - FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	.2..	..34	12	U24
....	....	....	....	....	.2..	.23.	12	U24
....	....	....	....	....	.2..	....	12	U24
....	....	....	....	....	....	....	.2	U20 U25
....	....	....	....	....	....	...4	1.	U23
....	....	....	....	....	.2..	.2..	1.	U24
....	....	....	....	....	.23.	....	1.	U15
....	....	....	....	....	.2..	....	1.	U13 U15 U17 U18 U20 U21
....	....	....	....	....	....	....	1.	U12 U14 U23
....	....	....	....	....	....	...4	..	U22 U23
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	..3.	....	..	U15
....	....	....	....	....	.2..	....	..	U18
....	....	....	....	....	1...	....	..	U12 U17

REVISION

COPIE A:
IND. REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

Nº 400240000

EMISS. AUG 1 1968

GENERAL ELECTRIC

VOCABOLARIO FAULT
FAULT DICTIONARY

I^a APPLIC. GE 130

CONT. SU FO. 7 FO. 876

PIASTRA-BOARD VIAL 2A 0610076 E

PROVA-TEST = 16

CONFIGURAZIONI D'ERRORE - FAULTY PATTERNS								GUASTI , FAULTS
A	B	C	D	E	F	G	H	
....	....	....	....	....	....	...4	.2	U24
....	....	....	....	....	....	.2..	.2	U24
....	....	....	....	....	....	....	.2	U20 U24 U25
....	....	....	....	....	.2..	....	1.	U18
....	....	....	....	....	....	...4	..	U22 U23
....	....	....	....	....	....	.23.	..	U24
....	....	....	....	....	....	..3.	..	U24
....	....	....	....	....	....	.2..	..	U24
....	....	....	....	....	..3.	....	..	U15
....	....	....	....	....	12..	....	..	U17
....	....	....	....	....	.2..	....	..	U17 U18 U21
....	....	....	....	....	1...	....	..	U12 U17

REVISION

COPIE A:
IND. TO:
REV.

UNIT K270

COMPIL. GE 425

APPR.

SEZ. SPS - OGE
SEC.
LOC. PREGNANA (MI)

EMISS. AUG 1 1968

N° 4002400 00

CONT. SU FO. FO. 876

GE 115/3
120 - 130

PREVENTIVE MAINT. LOG

YEAR	MACHINE	TYPE and SERIAL N°.

MAINTENANCE TYPE G Approx. duration 1.0 h.h/10		
FREQ.	3 months	6 months
SHIFTS	2 - 3	1

SCHED. DATE	EFFECT. DATE	EFFECT. DURAT.	ENGR.

PIECE	REPL. FREQ. (hours)	SCHEDULED REPLACEMENTS					

DATE	NOTES

Mod. 0146

GENERAL ELECTRIC
GENERAL ELECTRIC INFORMATION SYSTEMS ITALIA

GE 115/3
120 - 130

MAINTENANCE SCHEDULE TYPE G

MACHINE OFF OPERATIONS

1 - PRELIMINARY

Read the notes listed on the Preventive Maintenance Log

2 - AIR FILTERS

Replace all system filters (if of "use and scrap" type) or clean them (if of "restorable" type).

N.B. For disc or tape subsystems, these due scheduled operations must be strictly respected.

MACHINE ON OPERATIONS

3 - CONSOLE

Depress :

LAMPS CHECK, SWITCH 1 and 2, LOAD 1 and 2, STEP BY STEP and check that all the appropriate display lamps on the operator (2,2) and maintenance (2,3) panels light.

4 - FINAL OPERATIONS

a - Replace the filter elements

b - Fill in the Preventive Maintenance Log.

NOTE

Reference numbers in brackets refer to Maintenance Manuals P.N. 4.571.4.001/A and P.N. 4.409.4.001/A.

The pertinent Preventive Maintenance Log has P.N. 4.033.4.072.2/A.